


Locking Device

KBS 23

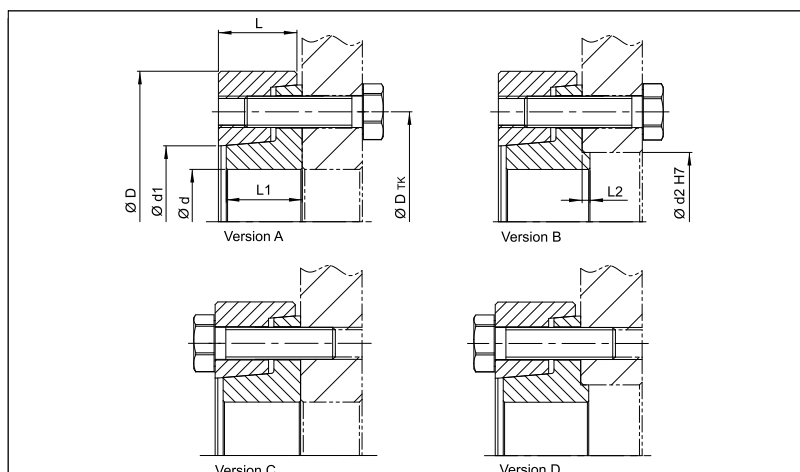

Recommended finishing tolerances of contact surfaces are: shaft h9 / hub H9

Order Code

Steel

KBS 23 - 40 x 115 - B

Type

Ød

ØD

Stainless steel

KBS 23 - 40 115 - B - VA

Type

Ød

ØD

chemically
nickel-plated

KBS 23 - 40 x 115 - B - NI

Type

Ød

ØD

Note: the locking device is supplied without screws.

Innen / Außen Ø Ød x ØD	Drehmoment T Nm	Abmessungen						Spannschrauben			Gewicht kg
		L mm	ØD TK mm	L1 mm	Ød1 mm	L2 mm	Ød2 mm	St.	ISO 4017	TA Nm	
40 x 115	1400	30	84	29	58	3	53	7	M12x45	100	2.0
45 x 115	2200	30	84	29	58	3	53	7	M12x45	100	2.0
50 x 115	2700	30	84	29	58	3	53	7	M12x45	100	2.0
50 x 120	3100	32	94	32	66	3	63	9	M12x50	100	2.2
55 x 120	3700	32	94	32	66	3	63	9	M12x50	100	2.2
60 x 120	3800	32	94	32	66	3	63	9	M12x50	100	2.2
60 x 148	5800	40	112	38	79	4	74	8	M16x60	250	4.7
65 x 148	7600	40	112	38	79	4	74	8	M16x60	250	4.7
70 x 148	7800	40	112	38	79	4	74	8	M16x60	250	4.7
70 x 170	8500	44	130	42	94	4	84	9	M16x65	250	6.1
75 x 170	10000	44	130	42	94	4	84	9	M16x65	250	6.1
80 x 170	12000	44	130	42	94	4	84	9	M16x65	250	6.1
80 x 185	13700	50	144	48	104	4	94	12	M16x70	250	8.0
85 x 185	14600	50	144	48	104	4	94	12	M16x70	250	8.0
90 x 185	14800	50	144	48	104	4	94	12	M16x70	250	8.0
90 x 197	16600	54	156	52	114	4	104	14	M16x75	250	9.5
95 x 197	18300	54	156	52	114	4	104	14	M16x75	250	9.5
100 x 197	18600	54	156	52	114	4	104	14	M16x75	250	9.5
100 x 215	22200	58	166	56	124	5	116	10	M20x90	490	12.1
105 x 215	22500	58	166	56	124	5	116	10	M20x90	490	12.1
110 x 215	22700	58	166	56	124	5	116	10	M20x90	490	12.1
110 x 230	33500	65	186	62	134	5	126	14	M20x90	490	15.3
115 x 230	33800	65	186	62	134	5	126	14	M20x90	490	15.3
120 x 230	34200	65	186	62	134	5	126	14	M20x90	490	15.3
120 x 290	42100	76	216	73	160	5	146	16	M20x100	490	30.0
130 x 290	47600	76	216	73	160	5	146	16	M20x100	490	30.0
140 x 290	48300	76	216	73	160	5	146	16	M20x100	490	30.0
140 x 320	65000	83	234	80	180	5	166	14	M24x110	840	39.1
150 x 320	66700	83	234	80	180	5	166	14	M24x110	840	39.1
160 x 320	67700	83	234	80	180	5	166	14	M24x110	840	39.1
160 x 340	81100	94	276	91	205	5	186	16	M24x130	840	47.9
170 x 340	82200	94	276	91	205	5	186	16	M24x130	840	47.9
180 x 340	83400	94	276	91	205	5	186	16	M24x130	840	47.9
180 x 370	118000	96	290	95	226	5	206	16	M27x140	1250	57.0
190 x 370	119600	96	290	95	226	5	206	16	M27x140	1250	57.0
200 x 370	121100	96	290	95	226	5	206	16	M27x140	1250	57.0
200 x 405	145900	100	320	98	246	5	226	18	M27x140	1250	70.8
210 x 405	147600	100	320	98	246	5	226	18	M27x140	1250	70.8
220 x 405	149400	100	320	98	246	5	226	18	M27x140	1250	70.8