


Locking Device

KBS 22



Recommended finishing tolerances of contact surfaces are: shaft h9 / hub H9

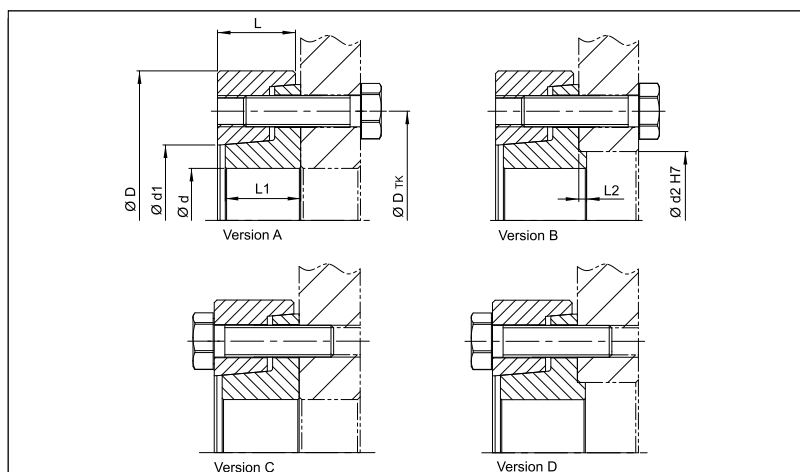

Order Code

Steel

KBS 22 - 11 x 35 - A

Type

Ød

ØD

Stainless steel

KBS 22 - 11 x 35 - A - VA

Type

Ød

ØD

chemically
nickel-plated

KBS 22 - 11 x 35 - A - NI

Type

Ød

ØD

Note: the locking device is supplied without screws.

Inner / Outer Ø Ød x ØD	Torque T Nm	Dimensions						Screws			Mass kg
		L mm	ØD TK mm	L1 mm	Ød1 mm	L2 mm	Ød2 mm	St.	ISO 4017	TA Nm	
11 x 35	70	11	24	10	13	1.5	14	3	M6x20	12	0.1
12 x 35	70	11	24	10	13	1.5	14	3	M6x20	12	0.1
13 x 38	80	12	26	11	15	1.5	16	3	M6x20	12	0.1
14 x 35	80	12	26	11	15	1.5	16	3	M6x20	12	0.1
15 x 41	90	15	28	14	17	2	18	3	M6x25	12	0.1
16 x 41	90	15	28	14	17	2	18	3	M6x25	12	0.1
17 x 44	120	15	30	14	19	2	20	4	M6x25	12	0.1
18 x 44	120	15	30	14	19	2	20	4	M6x25	12	0.1
19 x 47	130	15	32	14	21	2	22	4	M6x25	12	0.2
20 x 47	130	15	32	14	21	2	22	4	M6x25	12	0.2
21 x 50	190	19	36	18	26	2	27	5	M6x30	12	0.2
24 x 50	190	19	36	18	26	2	27	5	M6x30	12	0.2
25 x 50	190	19	36	18	26	2	27	5	M6x30	12	0.2
26 x 60	270	19	44	18	32	3	32	6	M6x30	12	0.3
28 x 60	270	19	44	18	32	3	32	6	M6x30	12	0.3
30 x 60	270	19	44	18	32	3	32	6	M6x30	12	0.3
31 x 72	471	21	52	20	38	3	38	5	M8x35	30	0.5
35 x 72	550	21	52	20	38	3	38	5	M8x35	30	0.5
36 x 72	560	21	52	20	38	3	38	5	M8x35	30	0.5
37 x 80	730	23	61	22	47	3	48	6	M8x35	30	0.6
40 x 80	730	23	61	22	47	3	48	6	M8x35	30	0.6
44 x 80	730	23	61	22	47	3	48	6	M8x35	30	0.6
42 x 90	1080	25	68	24	53	3	53	8	M8x40	30	0.9
45 x 90	1080	25	68	24	53	3	53	8	M8x40	30	0.9
50 x 90	1080	25	68	24	53	3	53	8	M8x40	30	0.9
45 x 100	1140	27	72	26	58	3	58	8	M8x40	30	1.2
52 x 100	1140	27	72	26	58	3	58	8	M8x40	30	1.2
55 x 100	1140	27	72	26	58	3	58	7	M8x40	30	1.2
50 x 110	1430	27	80	26	66	3	66	9	M8x40	30	1.4
60 x 110	1430	27	80	26	66	3	66	9	M8x40	30	1.4
62 x 110	1430	27	80	26	66	3	66	9	M8x40	30	1.4
70 x 115	1540	27	86	26	72	4	74	9	M8x40	30	1.4
65 x 115	1540	27	86	26	72	4	74	9	M8x40	30	1.4
60 x 115	1540	27	86	26	72	4	74	9	M8x40	30	1.4