


Performance Overview of Mechanical Linear Drives and Compact Modules with Toothed Belt Drive

Description	Toothed belt	F _x [N]	F _y [N]	F _z [N]	-F _z [N]	M _x [Nm]	M _y [Nm]	M _z [Nm]	M _{idle} [Nm]	d _s [mm]	s _{max} [mm]	L _{max} [mm]
Beta 40-ZGS	16 AT5-E	500	80	150	75	6	6	8	0.30	0.08	2780	3000
Beta 40-ZSS	16 AT5-E	500	500	600	300	12	30	30	0.30	0.08	1850	2070
Beta 50-C-ZRS	20 AT5-E	700	300	600	400	30	50	50	0.40	0.08	7710	8000
Beta 50-C-ARS	20 AT5-E	700	300	600	400	30	50	50	1.50	0.08	7710	8000
Beta 60-ZSS	25 AT5-E	850	500	1400	800	50	160	100	1.10	0.08	7620	8000
Beta 70-C-ZRS	32 AT5-E	1100	300	1000	400	35	120	50	1.20	0.08	7640	8000
Beta 70-C-ZSS	32 AT5-E	1100	600	1800	1200	60	180	120	1.20	0.08	6840	7200
Beta 70-C-ARS	32 AT5-E	900	300	1000	400	35	120	50	1.00	0.08	7640	8000
Beta 70-C-ASS	32 AT5-E	900	600	1800	1200	60	180	120	1.00	0.08	7640	8000
Beta 80-ZRS	32 AT5-E	1350	500	1500	800	50	180	100	1.50	0.08	7600	8000
Beta 80-ZSS	32 AT5-E	1350	800	3000	2000	100	250	250	1.50	0.08	7600	8000
Beta 80-C-ZRS	32 AT10	2200	1000	2500	1500	100	300	180	1.80	0.08	7600	8000
Beta 80-C-ZSS	32 AT10	2200	1600	4000	3000	300	500	500	1.80	0.08	7600	8000
Beta 80-C-ARS	32 AT10-E	1300	1000	2500	1500	100	300	180	1.80	0.08	7590	8000
Beta 80-C-ASS	32 AT10-E	1300	1600	4000	3000	300	500	500	1.80	0.08	7590	8000
Beta 100-ZRS	40 AT10	2800	1000	2500	1200	200	250	200	2.50	0.08	7420	7900
Beta 100-ZSS	40 AT10	2800	1000	3000	2000	200	300	300	2.50	0.08	7420	7900
Beta 100-D-ZSS	40 AT10-E	1500	1800	4000	3000	350	750	750	5.00	0.08	7720	8100
Beta 100-D-ASS	40 AT10-E	2200	1800	4000	3000	350	950	950	2.50	0.08	7680	8100
Beta 110-ZRS	50 ATL10	4000	2000	5000	2500	300	600	450	3.50	0.08	7520	8100
Beta 110-ZSS	50 ATL10	4000	3000	8000	4000	400	800	600	3.50	0.08	7520	8100
Beta 110-ARS	50 AT10-E	2000	2000	5000	2500	300	600	450	3.50	0.08	7440	8100
Beta 110-ASS	50 AT10-E	2000	3000	8000	4000	400	800	600	3.50	0.08	7440	8100
Beta 120-ZRS	50 ATL10	4000	2500	6000	3000	350	700	500	3.20	0.08	7520	8100
Beta 120-ZSS	50 ATL10	4000	3000	8000	4000	400	1200	600	3.20	0.08	7520	8100
Beta 120-C-ZSS	60ATL10	4800	4000	12000	6000	600	1500	1000	4.50	0.08	7500	8100
Beta 140-ZRS	50 AT10-E	4000	2500	5000	3000	350	700	500	3.50	0.08	7540	8100
Beta 140-ZSS	50 AT10-E	4000	2500	6000	4000	500	1000	1000	3.50	0.08	7540	8100
Beta 140-ARS	50 AT10-E	2500	2500	5000	3000	350	700	500	3.50	0.08	7380	8100
Beta 140-ASS	50 AT10-E	2500	2500	6000	4000	500	1000	1000	3.50	0.08	7470	8100
Beta 140-C-ZSS	50 AT10-E	4000	3200	7500	5000	600	1200	1200	3.50	0.08	7470	8100
Beta 140-C-ASS	50 AT10-E	2500	3200	7500	5000	600	1200	1200	3.50	0.08	7470	8100
Beta 165-ZSS	75 ATS15	10000	5000	15000	8000	700	1400	1100	12.00	0.08	6920	7700
Beta 180-ZSS	75 AT10	6000	6000	12000	6000	1500	3000	1500	8.00	0.08	5500	6200
Beta 180-ASS	75 AT10	3500	6000	12000	6000	1500	3000	1500	8.00	0.08	5470	6200
Beta 180-C-ZSS	75 AT10	6000	8000	15000	8000	1800	3600	1800	8.00	0.08	5500	6200
Beta 180-C-ASS	75 AT10	3500	8000	15000	8000	1800	3600	1800	8.00	0.08	5470	6200
Delta 90-ZRS	32 AT5-E	800	500	1000	1000	60	80	80	1.50	0.08	3720	4000
Delta 110-C-ZSS	50 AT5-E	1100	1200	3000	1500	500	550	550	2.00	0.08	7820	8100
Delta 145-C-ZSS	60 AT5-E	2000	2500	5000	3000	800	1000	1000	3.00	0.08	7700	8100
Delta 200-ZSS	75 AT10	6000	5000	8000	5000	3500	4300	3200	6.80	0.08	1520	2000
Delta 240-ZSS	50 AT10-E	2500	6000	12000	8000	4500	6000	4500	5.50	0.08	2550	3000
Delta 240-C-ZSS	60 ATL10	3800	6000	12000	8000	4500	6000	4500	5.50	0.08	7540	8000

For mechanical linear drives with roller guides, the static load rating (C_{stat} page TL11) applies for static loads.


- M_{idle} = Idle torque ±30 %
- d_s = Repeat accuracy ±
- s_{max} = Maximum standard stroke length (longer on request)
- L_{max} = Maximum standard length (longer on request)

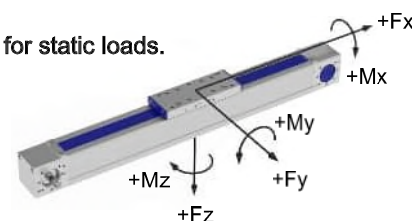

Description	Screw Drive	F _x [N]	F _y [N]	F _z [N]	-F _z [N]	M _x [Nm]	M _y [Nm]	M _z [Nm]	M _{idle} [Nm]	d _{pn/ps} [mm]	d _s [mm]	SA	s _{max} [mm]	L _{max} [mm]
Beta 40-SGS	1205 / 1210	1000	80	150	75	6	6	8	0.3	0.08 / 0.03	0.03	2	1840	2040
Beta 40-SSS		1000	500	600	300	12	30	30	0.3	0.08 / 0.03	0.03	2	1840	2040
Beta 50-C-SRS	1205 / 1210	1000	300	600	400	30	50	50	0.3	0.08 / 0.03	0.03	-	860	1090
Beta 60-SSS	2005 / 2010	4000	600	1800	1200	60	180	120	0.7	0.08 / 0.03	0.03	8	5220	5500
Beta 60-SGV	2020 / 2050	4000	-	-	-	-	-	-	0.7	0.08 / 0.03	0.03	8	5220	5500
Beta 70-C-SRS	1605 / 1610	2000	300	1000	400	35	120	60	0.35	0.08 / 0.03	0.03	8	3725	4000
Beta 70-C-SSS	1620 / 1640	2000	600	1800	1200	60	180	120	0.4	0.08 / 0.03	0.03	8	3725	4000
Beta 80-SRS	2005 / 2010	4000	500	1500	800	50	180	100	0.6	0.08 / 0.03	0.03	8	5220	5600
Beta 80-SSS	2020 / 2050	4000	800	3000	2000	100	250	250	0.8	0.08 / 0.03	0.03	8	5220	5600
Beta 80-SGV	2505 / 2510 2525 / 2550	6000	-	-	-	-	-	-	1,00	0.1 / 0.04	0.03	8	5220	5600
Beta 100-D-SSS	2005 / 2010 2020 / 2050	4000	1800	4000	3000	350	750	750	1.3	0.08 / 0.03	0.03	8	5260	5600
Beta 110-SRS	2505 / 2510	6000	2000	5000	2500	300	600	450	1,00	0.1 / 0.04	0.03	8	5120	5600
Beta 110-SSS	2525 / 2550	6000	3000	8000	4000	400	800	600	1.5	0.1 / 0.04	0.03	8	5120	5600
Beta 110-C-SGV	4005 / 4010 4020 / 4040	16000	-	-	-	-	-	-	1.5	0.1 / 0.04	0.03	6	5120	5600
Beta 120-C-SSS	3205 / 3210 3220 / 3240 3260	12000	4000	12000	6000	600	1500	1000	2,00	0.1 / 0.04	0.03	8	5120	5600
Beta 140-SSS	2505 / 2510	6000	2500	6000	4000	500	1000	1000	1.5	0.1 / 0.04	0.03	8	5120	5600
Beta 140-C-SSS	2525 / 2550	6000	3200	7500	5000	600	1200	1200	1.5	0.1 / 0.04	0.03	8	5120	5600
Beta 165-SSS	4005 / 4010	18000	5000	15000	8000	700	1400	1100	3,00	0.1 / 0.04	0.03	8	5010	5600
Beta 165-SGV	4020 / 4040	18000	-	-	-	-	-	-	3,00	0.1 / 0.04	0.03	8	5020	5600
Beta 165-C-SGV	5010 / 5020	25000	-	-	-	-	-	-	3.2	0.1 / 0.04	0.03	6	5020	5600
Beta 165-C-SSF	5010 / 5020	25000	5000	15000	8000	800	1800	1400	3.2	0.1 / 0.04	0.03	6	5010	5600
Beta 180-SSS	3205 / 3210 3220 / 3240	12000	6000	12000	6000	1500	3000	1500	2.5	0.1 / 0.04	0.03	8	5030	5600
Beta 180-C-SSS	3260	12000	8000	15000	8000	1800	3600	1800	2.5	0.1 / 0.04	0.03	8	5030	5600
Delta 90-SRS	1205 / 1210	1000	500	1000	1000	60	80	80	0.8	0.08 / 0.03	0.03	2	1185	1500
Delta 110-C-SSS	1605 / 1610 1620 / 1640	2000	1200	3000	1500	500	550	550	1,00	0.08 / 0.03	0.03	8	5455	5600
Delta 145-C-SSS	2005 / 2010 2020 / 2050	4000	2500	5000	3000	800	1000	1000	1,00	0.08 / 0.03	0.03	8	5275	5600
Delta 200-SSS	3205 / 3210	10000	5000	8000	5000	3500	4300	3200	2.8	0.1 / 0.04	0.03	4	1620	2000
Delta 240-SSS	3220 / 3240	12000	6000	12000	8000	4500	6000	4500	2.8	0.1 / 0.04	0.03	4	2600	3000
Delta 240-C-SSS	3260	12000	6000	12000	8000	4500	6000	4500	2.8	0.1 / 0.04	0.03	4	5400	5600
Alpha 15-B-155	2005 / 2010 2020 / 2050	4000	2000	20000	15000	1000	900	400	0.35	0.08 / 0.03	0.03	-	1235	1500
Alpha 20-B-225	2505 / 2510 2525 / 2550	6000	5000	58000	40000	4000	3000	1200	1.2	0.1 / 0.04	0.03	-	1645	2000
Alpha 30-B-325	3205 / 3210 3220 / 3240	12000	11000	95000	63000	6300	7500	3750	1.6	0.1 / 0.04	0.03	-	2540	3000
Alpha 35-B-455	4005 / 4010 4020 / 4040	18000	14000	120000	80000	12000	10000	5000	2.5	0.1 / 0.04	0.03	-	2420	3000

For mechanical linear drives with roller guides, the static load rating (C_{stat} page TL11) applies for static loads.


- M_{idle} = Idle torque ±30 %
- d_{pn/ps} = Axial clearance (normal/low backlash)
- d_s = Repeat accuracy ±
- SA = Maximum number of spindle supports
- s_{max} = Maximum standard stroke length without spindle support (longer on request)
- L_{max} = Maximum standard length (longer on request)

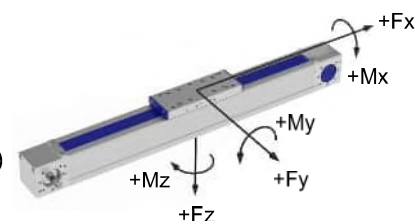


Chapter B

Mechanical Linear Drive

HSB-beta®

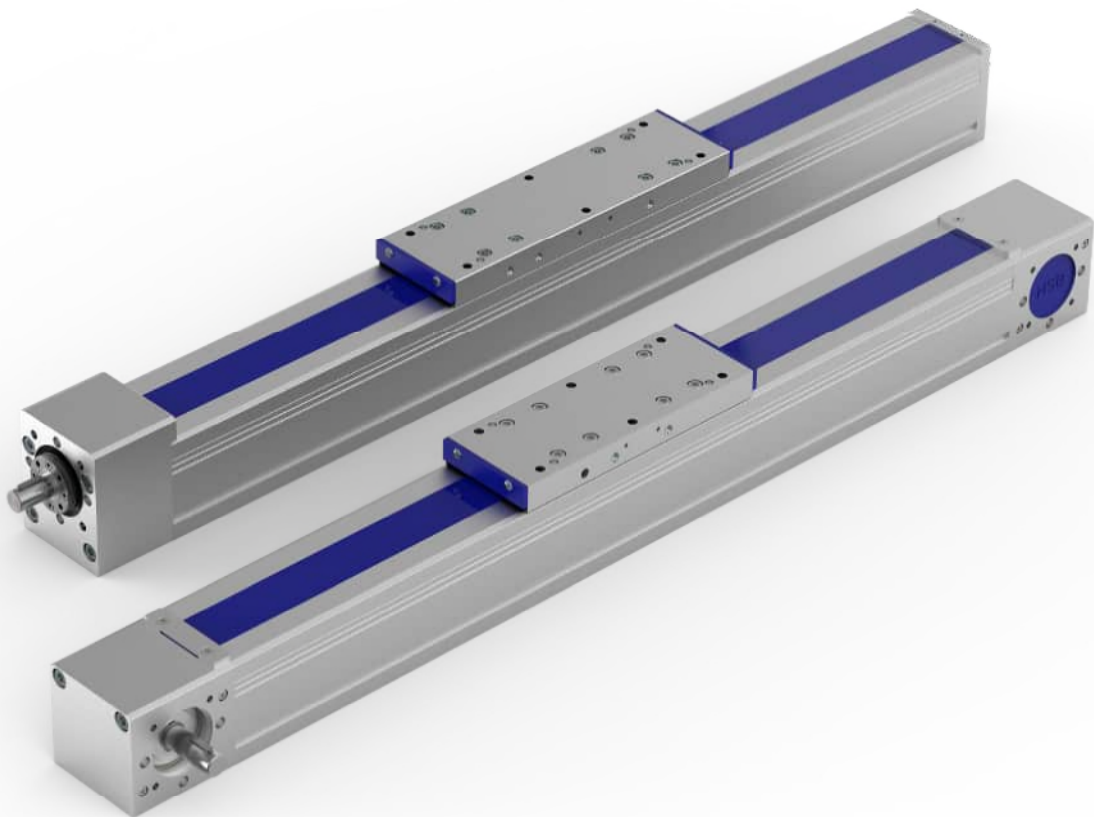

with toothed belt drive and sliding guide (ZGS) or rail guide (ZSS)

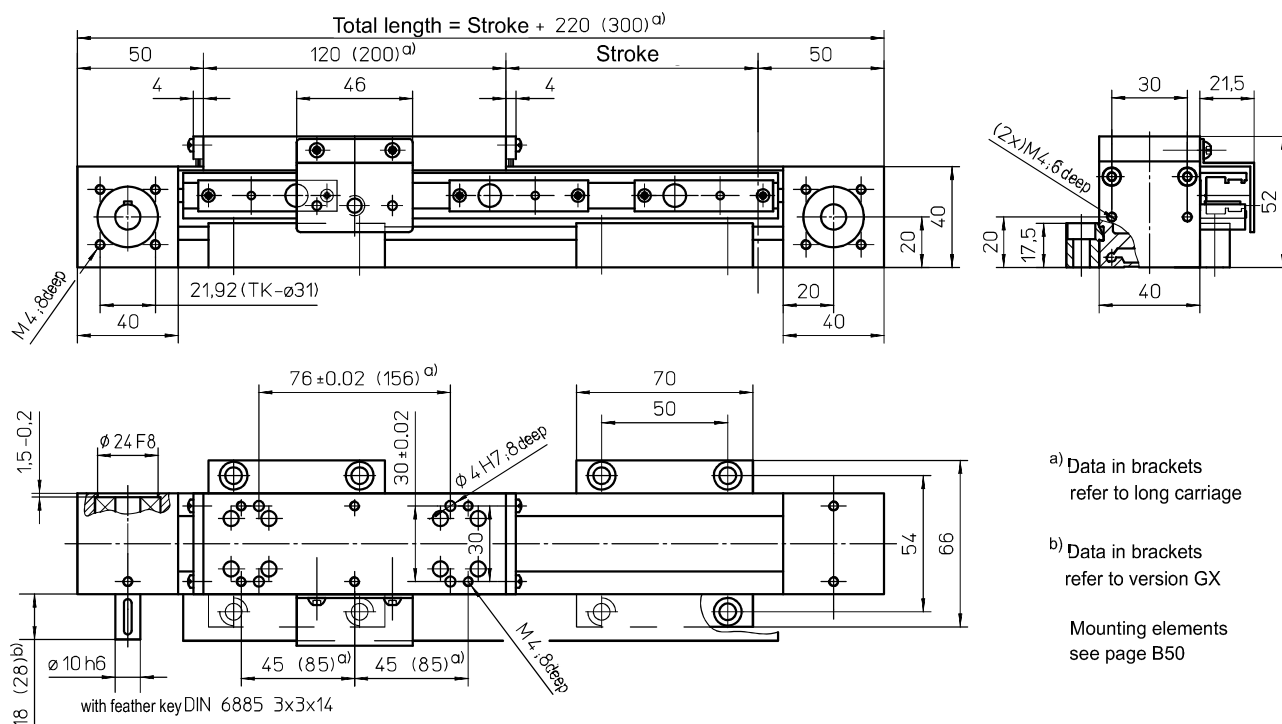

a) Data in brackets refer to long carriage


b) Data in brackets refer to version GX

Mounting elements see page B50

Weights	ZGS	ZSS
Basic length without stroke:	1.50 kg	1.70 kg
100 mm stroke:	0.20 kg	0.30 kg
Entire carriage 120 mm:	0.30 kg	
Entire carriage 200 mm:	0.50 kg	
Max. total length:	3000 mm	2070 mm

Technical Data	ZGS	ZSS
Max. speed:	1.00 m/s	3.00 m/s
Max. acceleration:	20 m/s ²	30 m/s ²
Repeat accuracy:	± 0.08 mm	
Idle torque:	0.30 Nm	
Moment of inertia:	2.00 • 10 ⁻⁴ kgm ²	
Drive element:	Toothed belt 16 AT5-E	
Stroke per revolution:	100 mm	

Forces and moments

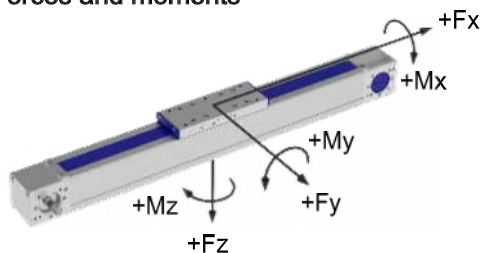


	ZGS	ZSS
Forces	Dynamic [N]	
F _x ^{d)}	500	
F _y	80	500
F _z	150	600
-F _z	75	300
Moments	Dynamic [Nm]	
M _x	6	12
M _y	6	30 (50)
M _z	8	30 (50)

^{d)} Maximum value (see diagram "F_x-v-Diagram")

Data in brackets refer to long carriage (200)

F_x - v - Diagram

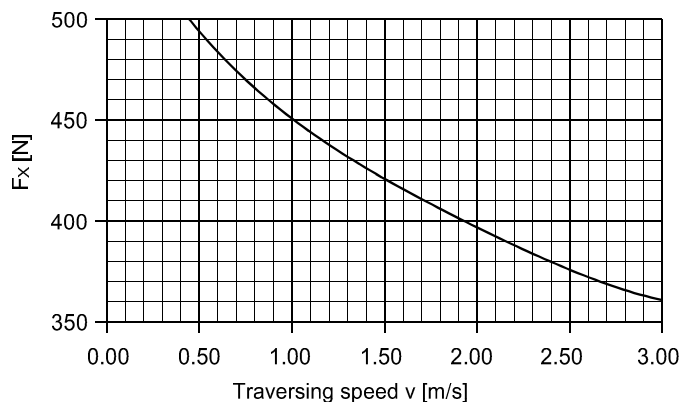

>> **Note** << Drive shaft is not changeable

Please define position, e.g. "AZ1"! (See Ordering Code)

Technical drawing of the B50 linear guide system, showing side and front views with dimensions and assembly notes.

Side View Dimensions:

- Total length = Stroke + 200 (280)^{a)}
- Extension by 2SA mm for every 40 mm
- for 2SA 80 60
- for 2SA 40 20
- Stroke
- 25
- 20
- 4
- 46
- 4
- 45
- 2
- 40
- 8
- 2
- 42
- 52
- 32
- 17.5
- 40
- 21.92
- 21.5
- M4, 8deep

Front View Dimensions:

- 76 ± 0,02 (156)^{a)}
- 30 ± 0,02
- φ 4 H7, 8deep
- 30
- M4, 8deep
- 45 (85)^{a)}
- 45 (85)^{a)}
- 70
- 50
- 54
- 66
- 1,5
- 5
- φ 24, k6
- φ 18

Notes:


- a) Data in brackets refer to long carriage
- Mounting elements see page B50

Technical Data	SGS	SSS
Max. speed:	0.5 m/s	
Max. acceleration:	20 m/s ²	
Repeat accuracy:	± 0.03 mm (KGT)	
Idle torque:	0.30 Nm	0.4 Nm

Drive element	KGT
Max. rotation speed:	3000 min ⁻¹
Diameter:	12 mm
Pitch:	5 / 10 mm
Moment of inertia:	1.13 ·10 ⁻⁵ kgm ² /m

Page B2


with toothed belt drive and roller guide (ZRS)

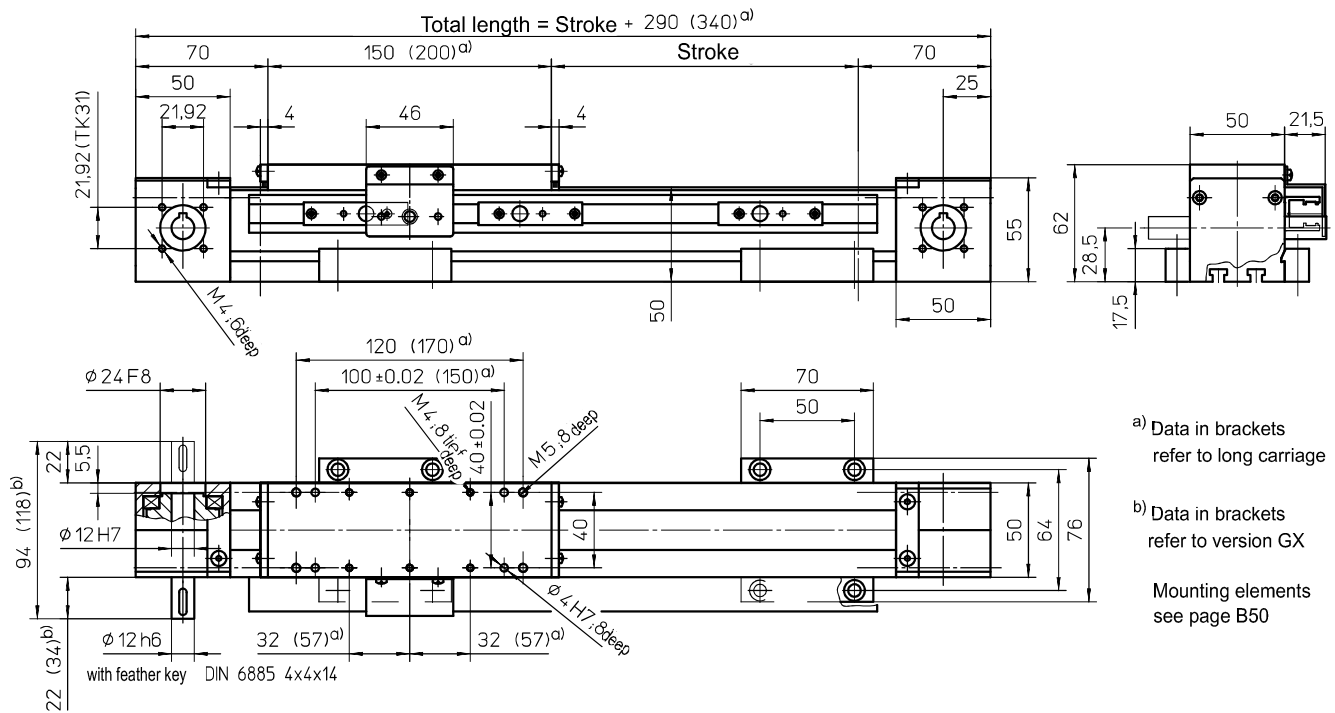

Weights	ZRS
Basic length without stroke:	1.45 kg
100 mm stroke:	0.35 kg
Entire carriage 150 mm:	0.45 kg
Entire carriage 200 mm:	0.60 kg
Max. total length: (longer on request)	8000 mm

Technical Data	ZRS
Max. total speed:	3.00 m/s
Max. acceleration:	30 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	0.40 Nm
Moment of inertia:	3.00 •10 ⁻⁴ kgm ²
Drive element:	Toothed belt 20 AT5-E
Stroke per revolution:	110 mm

Forces and moments

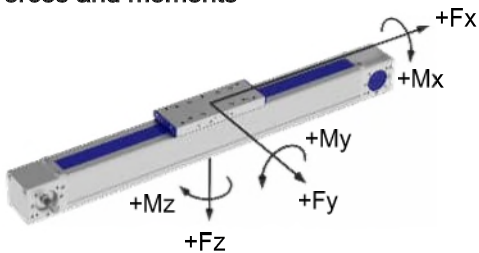


	ZRS
Forces	Dynamic [N]
$F_x^{(d)}$	700
F_y	300
F_z	600
$-F_z$	400
Moments	Dynamic [Nm]
M_x	30
M_y	50 (65)
M_z	50 (65)

d) Maximum value (see diagram "F_x-v-Diagram")


Data in brackets refer to long carriage (200)

$F_x - v$ - Diagram

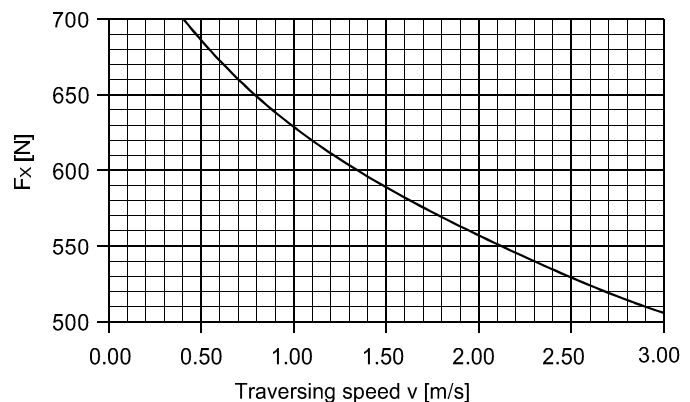

For mechanical linear drives with roller guide, the static load rating “C_{stat}” (page TL11) applies for static loads.

with toothed belt drive and roller guide (ARS)

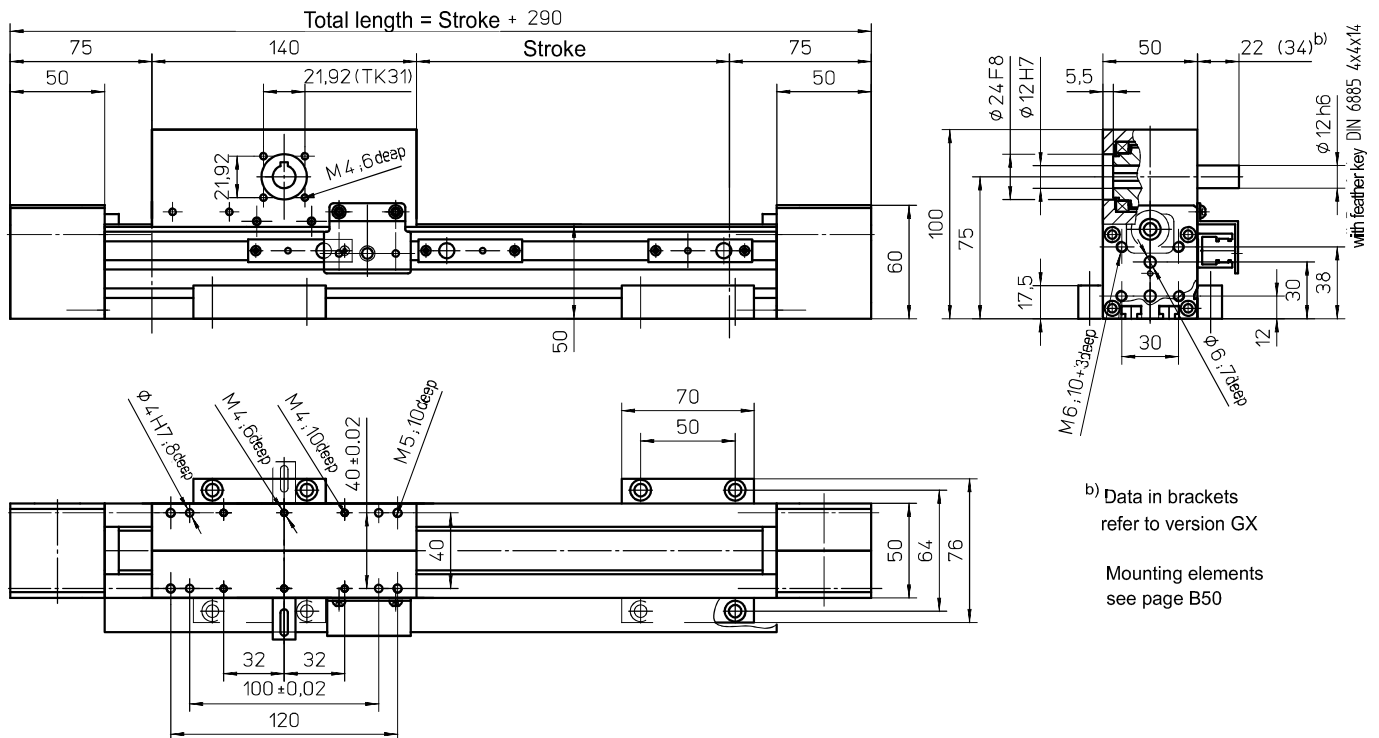

Weights

ARS


Basic length without stroke:	3.10 kg
100 mm stroke:	0.30 kg
Carriage drive 140 mm:	1.30 kg
Max. total length:	8000 mm
(longer on request)	

Technical Data

ARS

Max. speed:	3.00 m/s
Max. acceleration:	30 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	1.50 Nm
Moment of inertia:	3.00 •10 ⁻⁴ kgm ²
Drive element:	Toothed belt 20 AT5-E
Stroke per revolution:	110 mm


Forces and moments

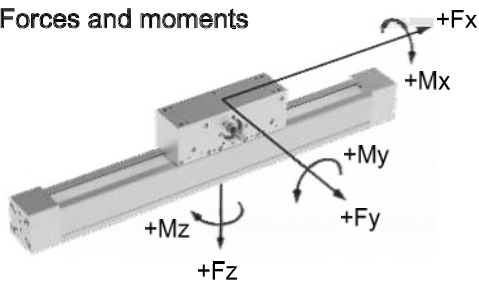

	ARS
Forces	Dynamic [N]
$F_x^{(d)}$	700
F_y	300
F_z	600
$-F_z$	400
Moments	Dynamic [Nm]
M_x	30
M_y	50
M_z	50


d) Maximum value (see diagram "F_x-v-Diagram")

$F_x - v$ - Diagram

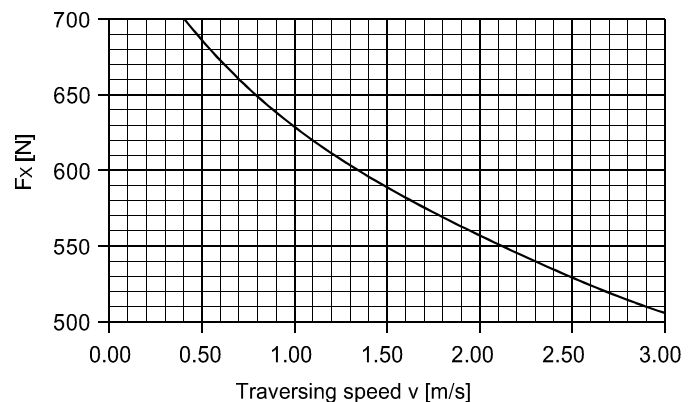

For mechanical linear drives with roller guide,
the static load rating “ C_{stat} ” (page TL 11) applies for static loads.

with ball screw (KGT) and roller guide (SRS)

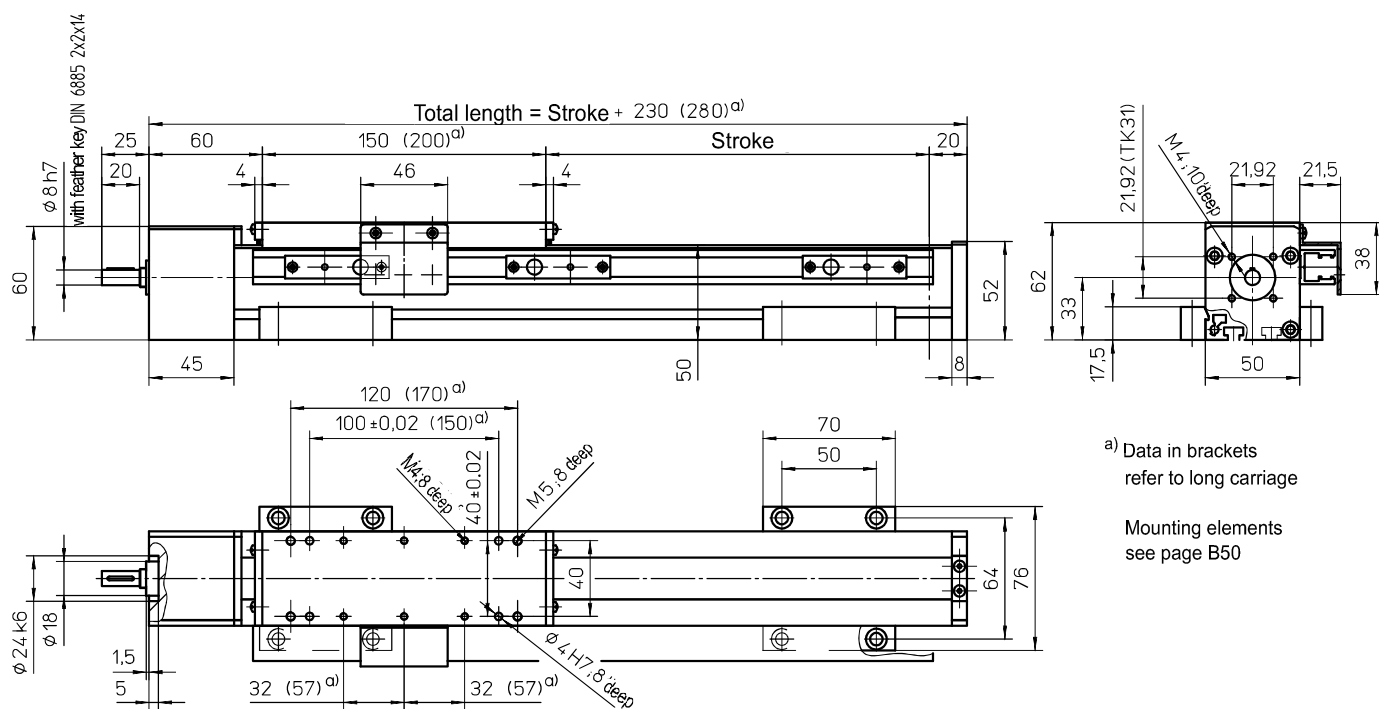

a) Data in brackets refer to long carriage

Mounting elements
see page B50

Weights SRS


Basic length without stroke:	1.50 kg
100 mm stroke:	0.40 kg
Entire carriage 150 mm:	0.45 kg
Entire carriage 200 mm:	0.60 kg

Max. total length: 1090 mm

Technical Data SRS

Max. speed:	0.5 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	0.30 Nm

Forces and moments

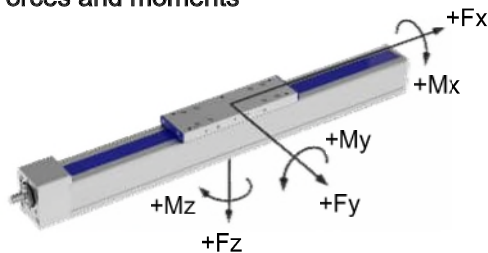


	SRS
Forces	Dynamic [N]
F_x	1000
F_y	300
F_z	600
$-F_z$	400
Moments	Dynamic [Nm]
M_x	30
M_y	50 (65)
M_z	50 (65)

Data in brackets refer to long carriage (200)

Drive element	KGT
---------------	-----

Max. rotation speed: 3000 min⁻¹
Diameter: 12 mm
Pitch: 5 / 10 mm
Moment of inertia: 1.13 · 10⁻⁵ kgm²/m

Max. rotation speed

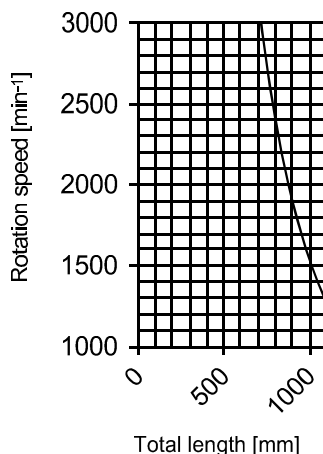

For mechanical linear drives with roller guide,
the static load rating “C_{stat}” (page TL 11) applies for static loads.
Version with double nut not possible.

Technical Drawing of the B50 Linear Guide System

Top View (Front View):

- Total length = Stroke + 330 (380)^{a)}
- Stroke dimension is indicated.
- Overall width: 63
- Mounting flange width: 75
- Internal dimensions: 42.4, 4, 4, 60, 60

Side View:

- Overall height: 86
- Mounting flange height: 74
- Internal dimensions: 70, 50, 70

Cross-sectional View (Right):

- Overall width: 60
- Internal dimensions: 21.5, 13, 34 (39)^{b)}, 30, 80
- Mounting hole diameter: $\phi 14 \text{ H6}$
- Mounting hole depth: 5x5x20

Mounting Details (Bottom Left):

- Mounting hole diameter: $\phi 47 \text{ F8}$
- Mounting hole diameter: $\phi 14 \text{ H7}$
- Mounting hole depth: M6, 8 deep
- Mounting hole diameter: $\phi 6 \text{ H7, 6 deep}$
- Mounting hole diameter: M6, 9 deep
- Mounting hole diameter: 90 ± 0.02 (140)^{a)}
- Mounting hole diameter: 40 ± 0.02
- Mounting hole diameter: 40
- Mounting hole diameter: 37 (62)^{a)}
- Mounting hole diameter: 70 (95)^{a)}
- Mounting hole diameter: 70 (95)^{a)}
- Mounting hole diameter: 37 (62)^{a)}

Notes:

- a) Data in brackets refer to long carriage
- b) Data in brackets refer to version GX
- Mounting elements see page B50
- with feather key DIN 6885 5x5x20

Technical Data	ZSS
Max. speed:	5.00 m/s
Max. acceleration:	30 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	1.10 Nm
Moment of inertia:	2.00 •10 ⁻⁴ kgm ²
Drive element:	Toothed belt 25 AT5-E
Stroke per revolution:	160 mm


A 3D perspective diagram of a beam element. The beam is a long, thin rectangular prism with a blue longitudinal slot. At the right end, a coordinate system is defined with three axes: a vertical axis pointing upwards labeled $+F_z$, a horizontal axis pointing to the right labeled $+F_x$, and a diagonal axis pointing downwards and to the right labeled $+F_y$. Corresponding moments are shown as curved arrows: $+M_z$ around the vertical axis, $+M_x$ around the horizontal axis, and $+M_y$ around the diagonal axis.

^{d)} Maximum value (see diagram "F_x-v-Diagram")
Data in brackets refer to long carriage (230)

The graph shows the relationship between the x-component of the force F_x and the traversing speed v . The y-axis represents F_x in Newtons [N], ranging from 600 to 850. The x-axis represents the traversing speed v in m/s, ranging from 0.00 to 5.00. The curve starts at $v = 0.8$ m/s with $F_x = 850$ N and decreases as speed increases, reaching approximately 615 N at $v = 5.0$ m/s.

Traversing speed v [m/s]	F_x [N]
0.8	850
1.0	820
2.0	750
3.0	700
4.0	650
5.0	615

with ball screw (KGT) and sliding guide (SGV) or rail guide (SSS)

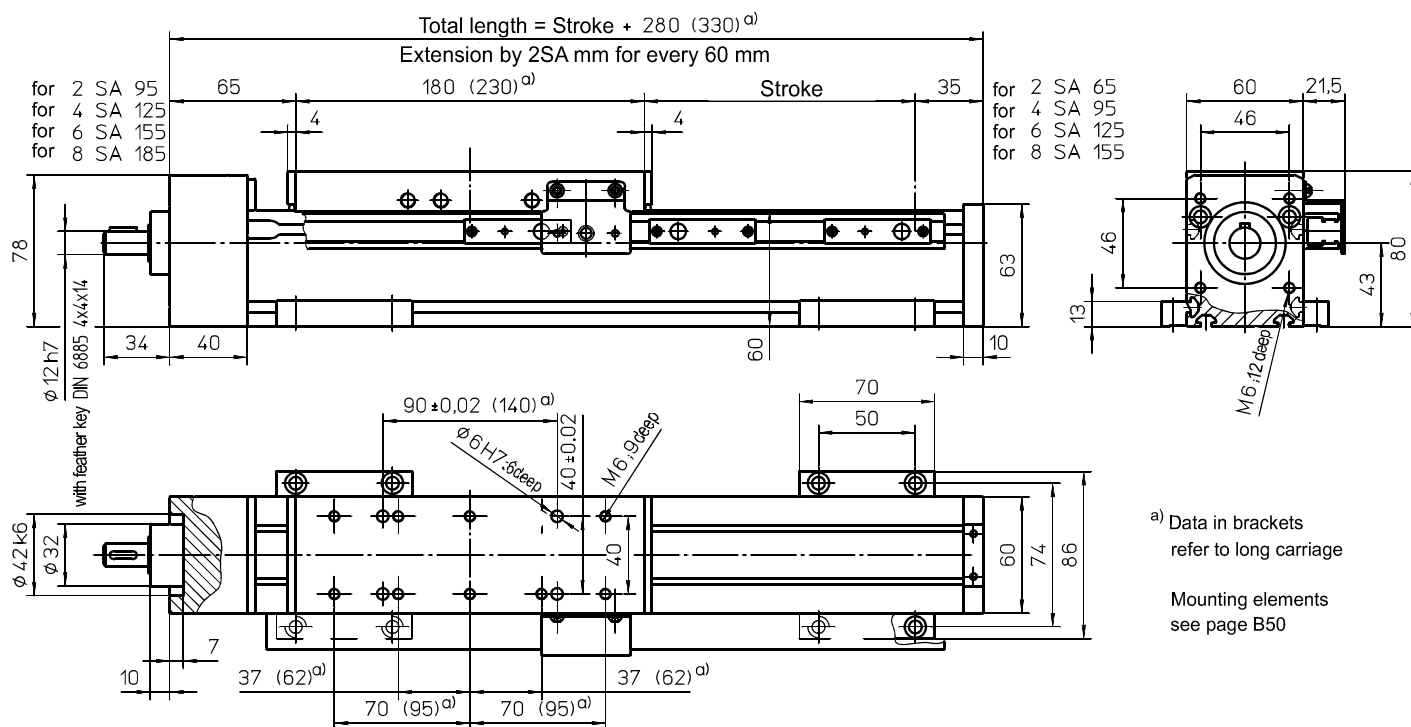

a) Data in brackets refer to long carriage


Mounting elements
see page B50

Weights	SGV	SSS
Basic length without stroke:	3.65 kg	4.30 kg
100 mm stroke:	0.65 kg	0.80 kg
Entire carriage 180 mm:	1.15 kg	1.50 kg
Entire carriage 230 mm:	-	1.80 kg

Max. total length: 5500 mm
(longer on request)

Technical Data	SGV	SSS
Max. speed:	2.50 m/s	
Max. acceleration:	20 m/s ²	
Repeat accuracy:	± 0.03 mm (KGT)	
Idle torque:	0.70 Nm	

Forces and moments

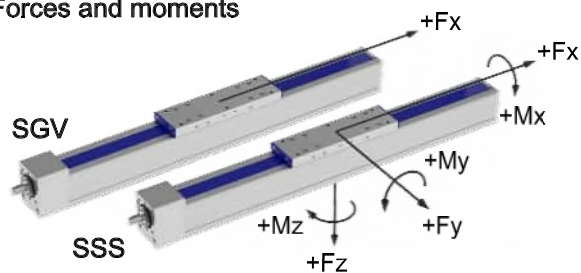

	SGV	SSS
Forces	Dynamic [N]	
F_x	4000	
F_y	-	600
F_z	-	1800
$-F_z$	-	1200
Moments	Dynamic [Nm]	
M_x	-	60
M_y	-	180 (220)
M_z	-	120 (150)


“-” => Must have an external guide.

Data in brackets refer to long carriage (230)

Drive element	KGT
---------------	-----


Max. rotation speed: 3000 min⁻¹
 Diameter: 20 mm
 Pitch: 5 / 10 / 20 / 50 mm
 Moment of inertia: 8.40 • 10⁻⁵ kgm²/m

Spindle support (SA)

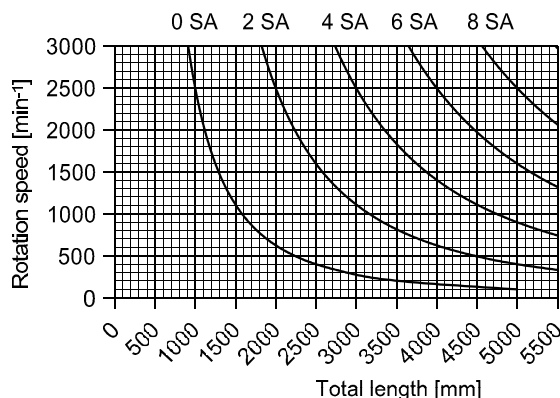

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)
Design with double nut („MM“) is only available with carriage plate 230 mm and pitch „5“, „10“ oder „20“.
Design with single nut („M“) and pitch „50“ is only available with carriage plate 230 mm.

with toothed belt drive and roller guide (ZRS) or rail guide (ZSS)

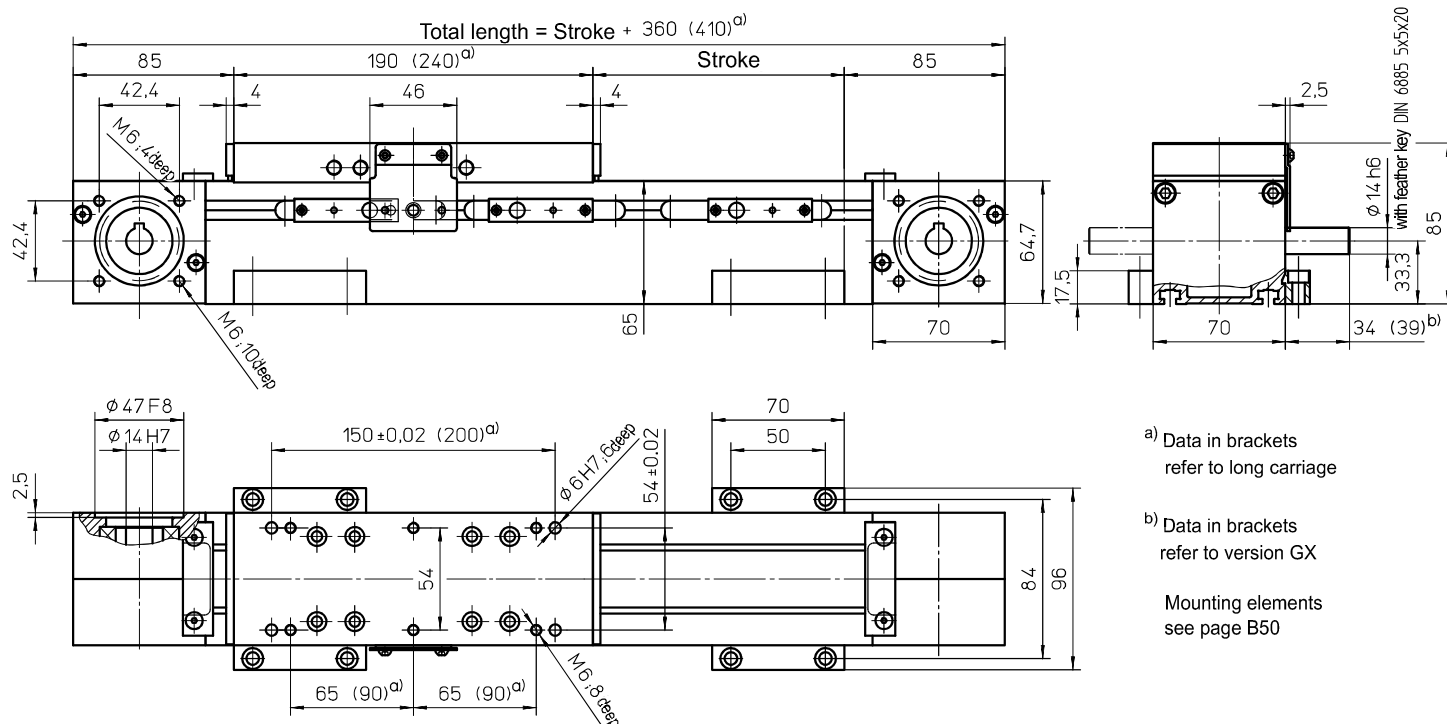

a) Data in brackets refer to long carriage


b) Data in brackets refer to version GX

Mounting elements see page B50

Weights	ZRS	ZSS
Basic length without stroke:	3.10 kg	3.40 kg
100 mm stroke:	0.45 kg	0.60 kg
Entire carriage 190 mm:	1.30 kg	1.65 kg
Entire carriage 240 mm:	1.65 kg	2.10 kg
Max. total length: (longer on request)	8000 mm	7200 mm

Technical Data	ZRS	ZSS
Max. speed:	8.00 m/s	5.00 m/s
Max. acceleration:	30 m/s ²	
Repeat accuracy:	± 0.08 mm	
Idle torque:	1.20 Nm	
Moment of inertia:	4.00 • 10 ⁻⁴ kgm ²	2.00 • 10 ⁻⁴ kgm ²
Drive element:	Toothed belt 32 AT5-E	
Stroke per revolution:	175 mm	


Forces and moments

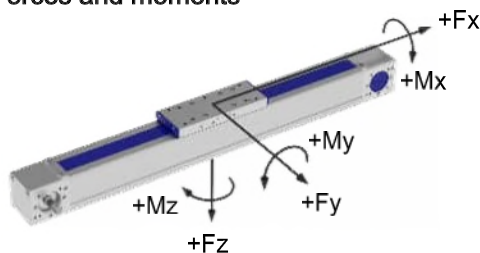

	ZRS	ZSS
Forces	Dynamic [N]	
F _x ^{d)}	1100	
F _y	300	600
F _z	1000	1800
-F _z	400	1200
Moments	Dynamic [Nm]	
M _x	35	60
M _y	120 (150)	180 (230)
M _z	50 (60)	120 (150)

^{d)} Maximum value (see diagram "F_x-v-Diagram")
Data in brackets refer to long carriage plate (240)

F_x - v - Diagram

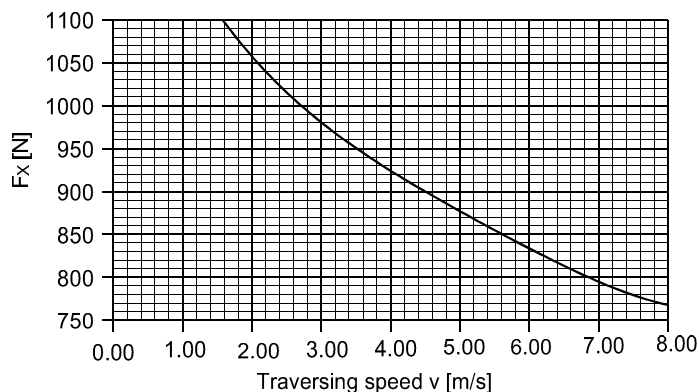

For mechanical linear drives with roller guide, the static load rating "C_{stat}" (page TL 11) applies for static loads.

Technical drawing of the B50 bracket, showing dimensions and annotations for the front, side, and detail views.

Front View Dimensions:

- Total length = Stroke + 360
- Stroke
- 70
- 220
- 60
- 75
- $\phi 8 \text{ H7: } 5.5 \text{ deep}$
- M6: 10 deep
- 62 ± 0.02
- 46
- 31 ± 0.02
- 46

Side View Dimensions:

- 135 ± 0.02
- 70
- 50
- 54
- 54
- 84
- 96
- 82
- 82
- M6: 11 deep
- $\phi 16 \text{ H7}$
- $\phi 50 \text{ F8}$
- 3
- $\phi 8 \text{ H7: } 10 \text{ deep}$

Detail View Dimensions:

- 150
- 62
- 50
- 17.5
- 12
- 32
- 70
- 34 (39)^{b)}
- $\phi 16 \text{ h6}$
- 107
- M6: 10 deep
- $\phi 6 \text{ H7: } 7 \text{ deep}$
- with feather key DIN 6885 5x5x20


Annotations:

- ^{b)} Data in brackets refer to version GX
- Mounting elements see page B50

Technical Data	ARS	ASS
Max. speed:	5.00 m/s	
Max. acceleration:	30 m/s ²	
Repeat accuracy:	± 0.08 mm	
Idle torque:	1.00 Nm	
Moment of inertia:	6.10 • 10 ⁻³ kgm ²	
Drive element:	Toothed belt 32 AT5-E	
Stroke per revolution:	220 mm	


Diagram illustrating forces and moments acting on a beam element. The forces shown are $+F_x$, $+F_y$, and $+F_z$. The moments shown are $+M_x$, $+M_y$, and $+M_z$.

$F_x - v$ - Diagram

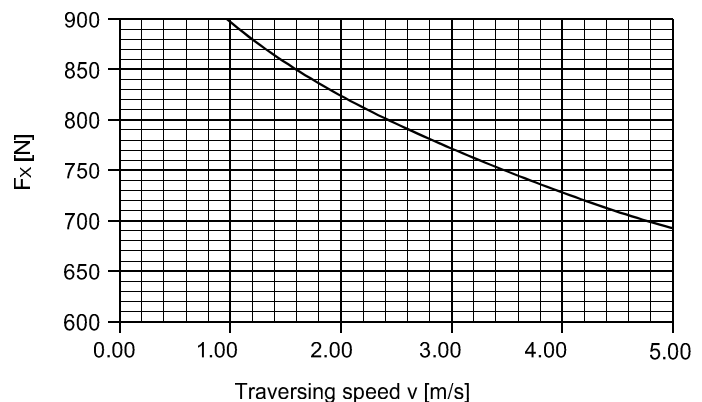

For mechanical linear drives with roller guide,
the static load rating “C_{stat}” (page TL 11) applies for static loads.

with ball screw (KGT) and roller guide (SRS) or rail guide (SSS)

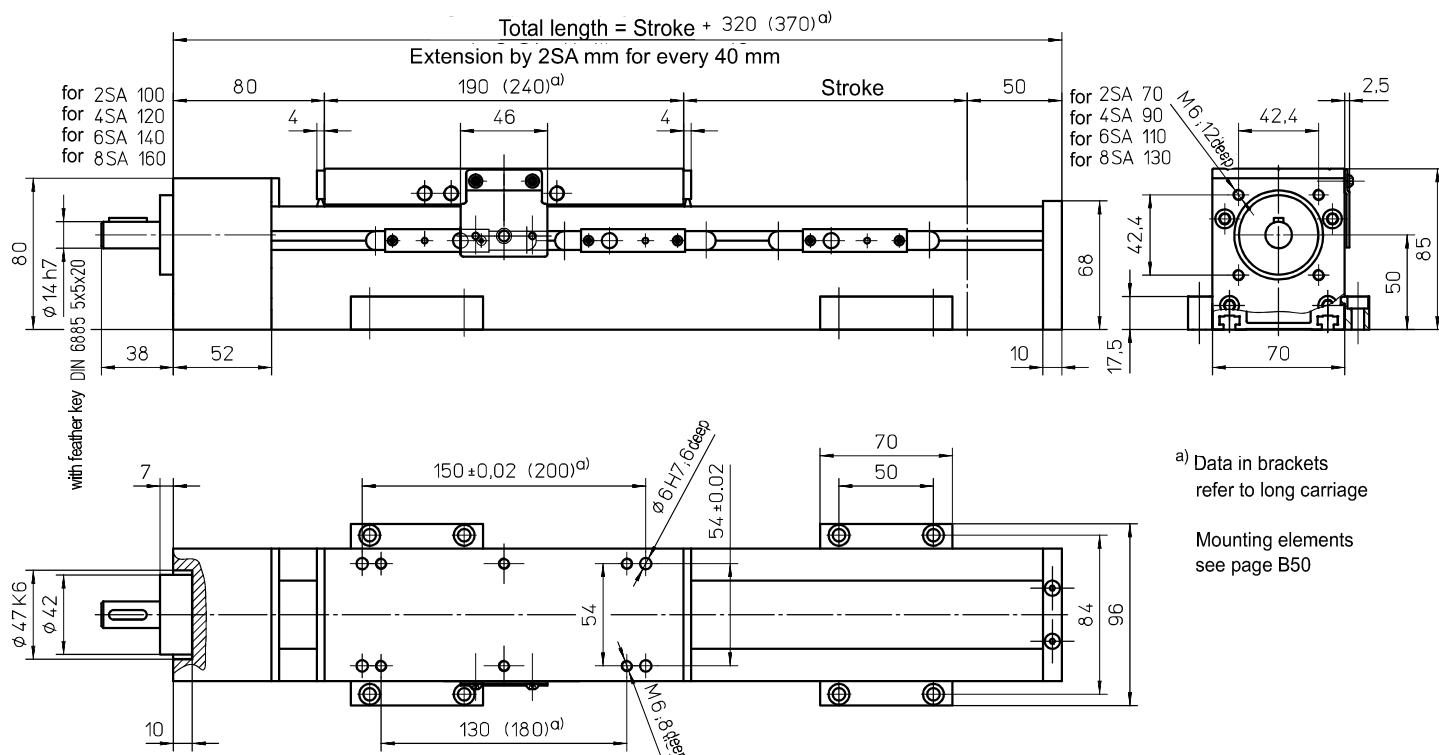

a) Data in brackets refer to long carriage


Mounting elements see page B50

Weights	SRS	SSS
Basic length without stroke:	3.65 kg	3.50 kg
100 mm stroke:	0.56 kg	0.71 kg
Entire carriage 190 mm:	1.60 kg	1.25 kg
Entire carriage 240 mm:	2.02 kg	1.60 kg

Max. total length: 4000 mm
(longer on request)

Technical Data	SRS	SSS
Max. speed:	2.00 m/s	
Max. acceleration:	20 m/s ²	
Repeat accuracy:	± 0.03 mm (KGT)	
Idle torque:	0.35 Nm	0.40 Nm

Forces and moments

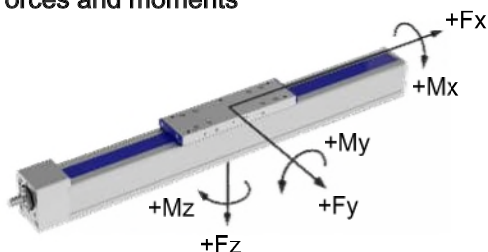

	SRS	SSS
Forces	Dynamic [N]	
F _x	2000	
F _y	300	600
F _z	1000	1800
-F _z	400	1200
Moments	Dynamic [Nm]	
M _x	35	60
M _y	120 (150)	180 (220)
M _z	60 (70)	120 (150)


Data in brackets refer to long carriage plate (240)

Drive element

KGT

Max. rotation speed:	3000 min ⁻¹
Diameter:	16 mm
Pitch:	5 / 10 / 20 / 40 mm
Moment of inertia:	3.32 • 10 ⁻⁵ kgm ² /m

Spindle support (SA)

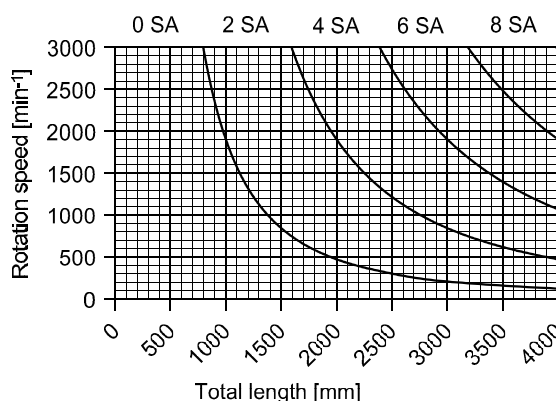


For version "SRS" only 6 SA possible.

For mechanical linear drives with roller guide, the static load rating "C_{stat}" (page TL 11) applies for static loads.

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

with toothed belt drive and roller guide (ZRS) or rail guide (ZSS)

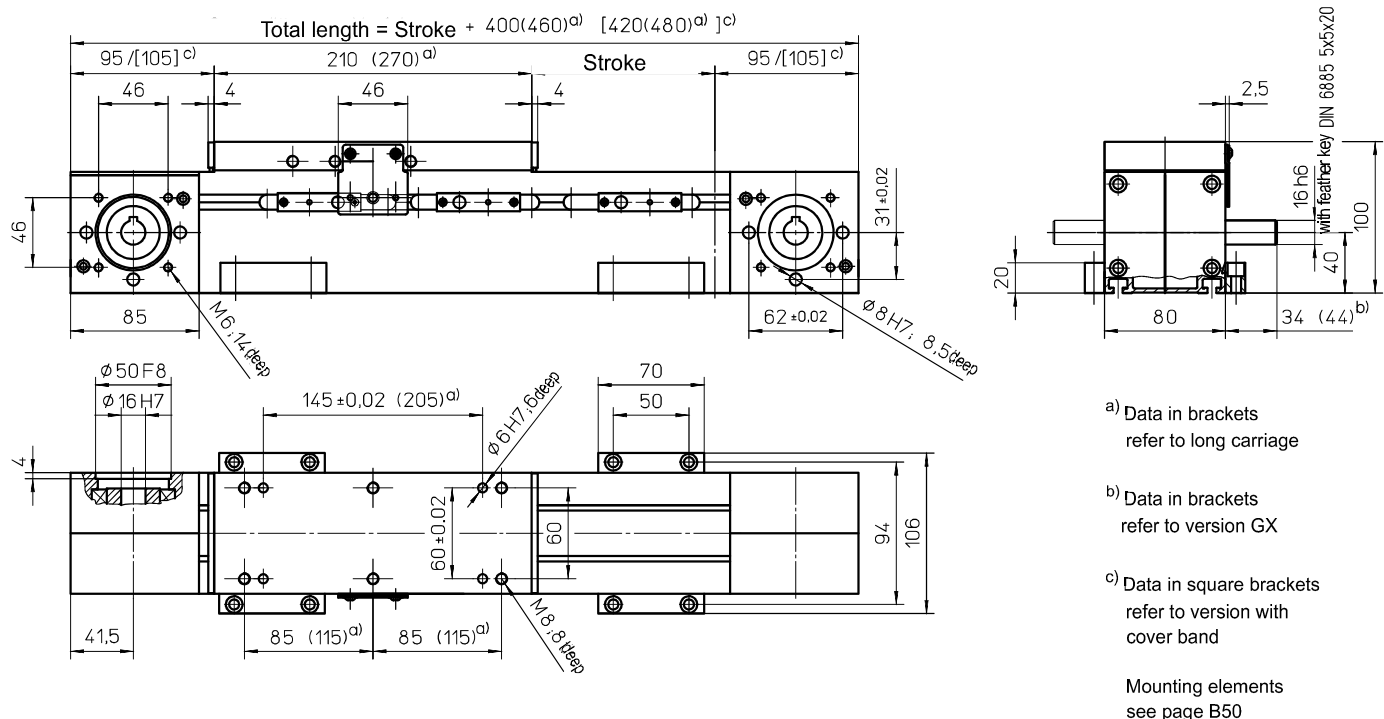


Weights	ZRS	ZSS
Basic length without stroke:	5.50 kg	6.10 kg
100 mm stroke:	0.60 kg	0.85 kg
Entire carriage 210 mm:	2.10 kg	1.80 kg
Entire carriage 270 mm:	2.70 kg	2.30 kg

Max. total length: 8000 mm
(longer on request)

Technical Data	ZRS	ZSS
Max. speed:	8.00 m/s	5.00 m/s
Max. acceleration:	40 m/s ²	
Repeat accuracy:	± 0.08 mm	
Idle torque:	1.50 Nm	
Moment of inertia:	3.30 • 10 ⁻³ kgm ²	3.00 • 10 ⁻³ kgm ²
Drive element:	Toothed belt 32 AT5-E	
Stroke per revolution:	220 mm	


Forces and moments

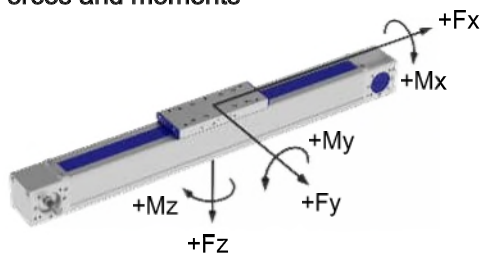

	ZRS	ZSS
Forces	Dynamic [N]	
F _x ^{d)}	1350	
F _y	500	800
F _z	1500	3000
-F _z	800	2000
Moments	Dynamic [Nm]	
M _x	50	100
M _y	180 (220)	250 (300)
M _z	100 (130)	250 (300)


^{d)} Maximum value (see diagram "F_x-v-Diagram")
Data in brackets refer to long carriage plate (270)

F_x - v - Diagram

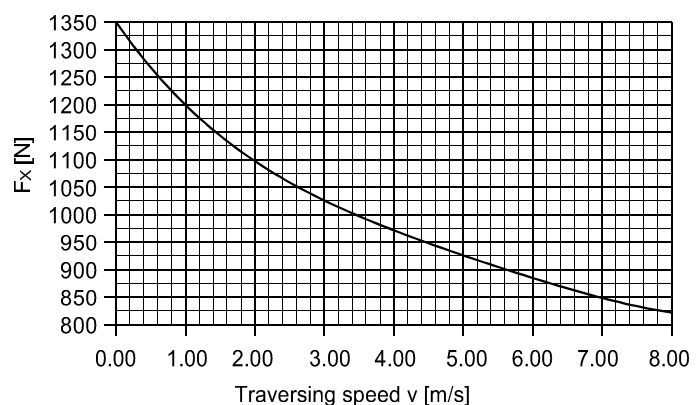

For mechanical linear drives with roller guide, the static load rating "C_{stat}" (page TL11) applies for static loads.


with ball screw (KGT) and roller guide (SRS) or rail guide (SSS)

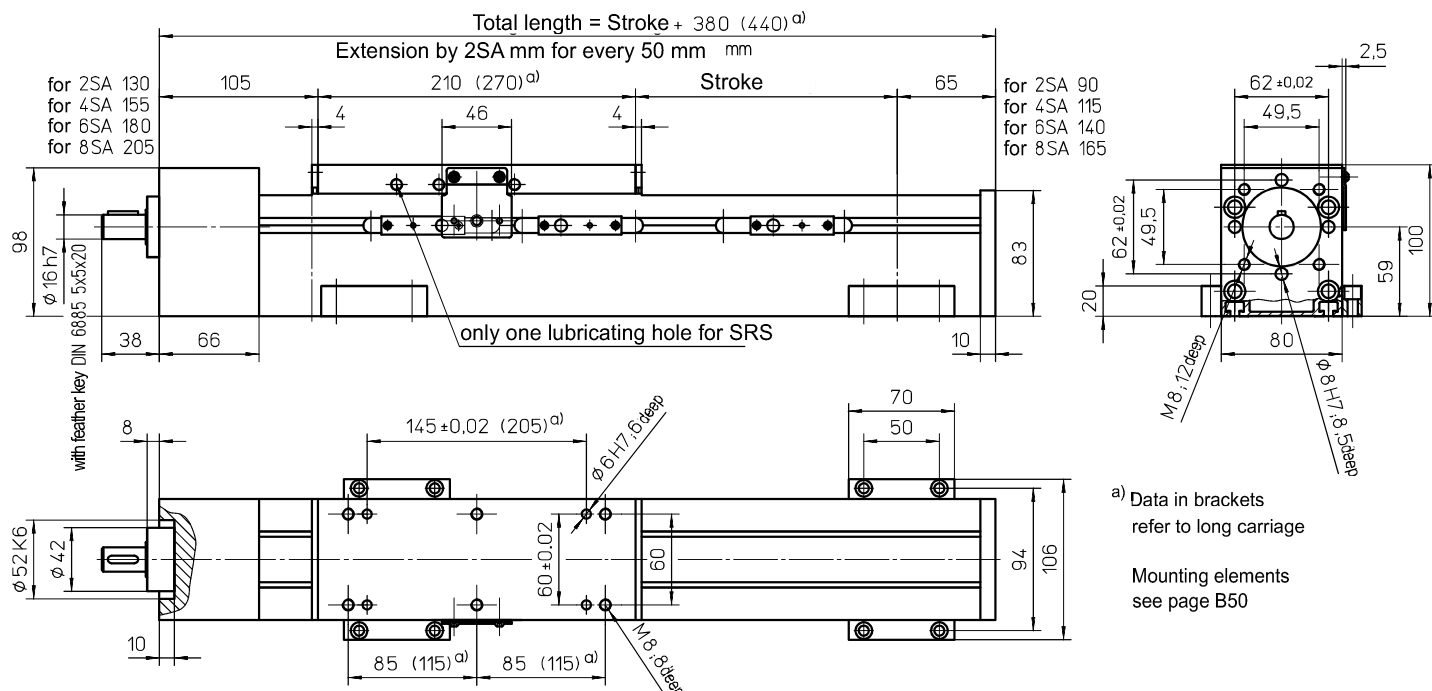

Weights	SRS	SSS
Basic length without stroke:	5.40 kg	6.20 kg
100 mm stroke:	0.70 kg	1.10 kg
Entire carriage 210 mm:	2.20 kg	1.90 kg
Entire carriage 270 mm:	2.80 kg	2.40 kg

Max. total length:
(longer on request) 5600 mm

Forces and moments

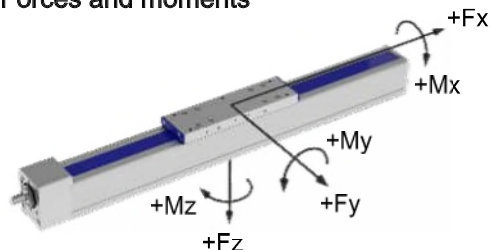

	SRS	SSS
Forces	Dynamic [N]	
F _x	4000	
F _y	500	800
F _z	1500	3000
-F _z	800	2000
Moments	Dynamic [Nm]	
M _x	50	100
M _y	180 (270)	250 (300)
M _z	100 (130)	250 (300)


Data in brackets refer to long carriage plate (270)

Technical Data	SRS	SSS
Max. speed:	2.50 m/s	
Max. acceleration:	20 m/s ²	
Repeat accuracy:	± 0.03 mm (KGT)	
Idle torque:	0.60 Nm	0.80 Nm

Drive element KGT

Max. rotation speed:	3000 min ⁻¹
Diameter:	20 mm
Pitch:	5 / 10 / 20 / 50 mm
Moment of inertia:	8.40 · 10 ⁻⁶ kgm ² /m

Spindle support (SA)

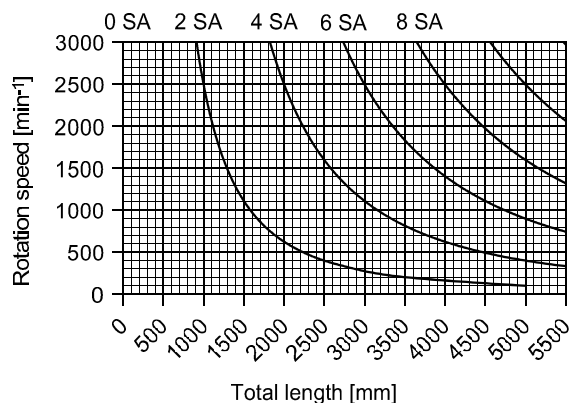


For mechanical linear drives with roller guide, the static load rating "C_{stat}" (page TL 11) applies for static loads.

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

Design with double nut („MM“) is only available with long carriage plate 270 mm and pitch „5“, „10“ oder „20“.

with ball screw (KGT) and sliding guide (SGV)

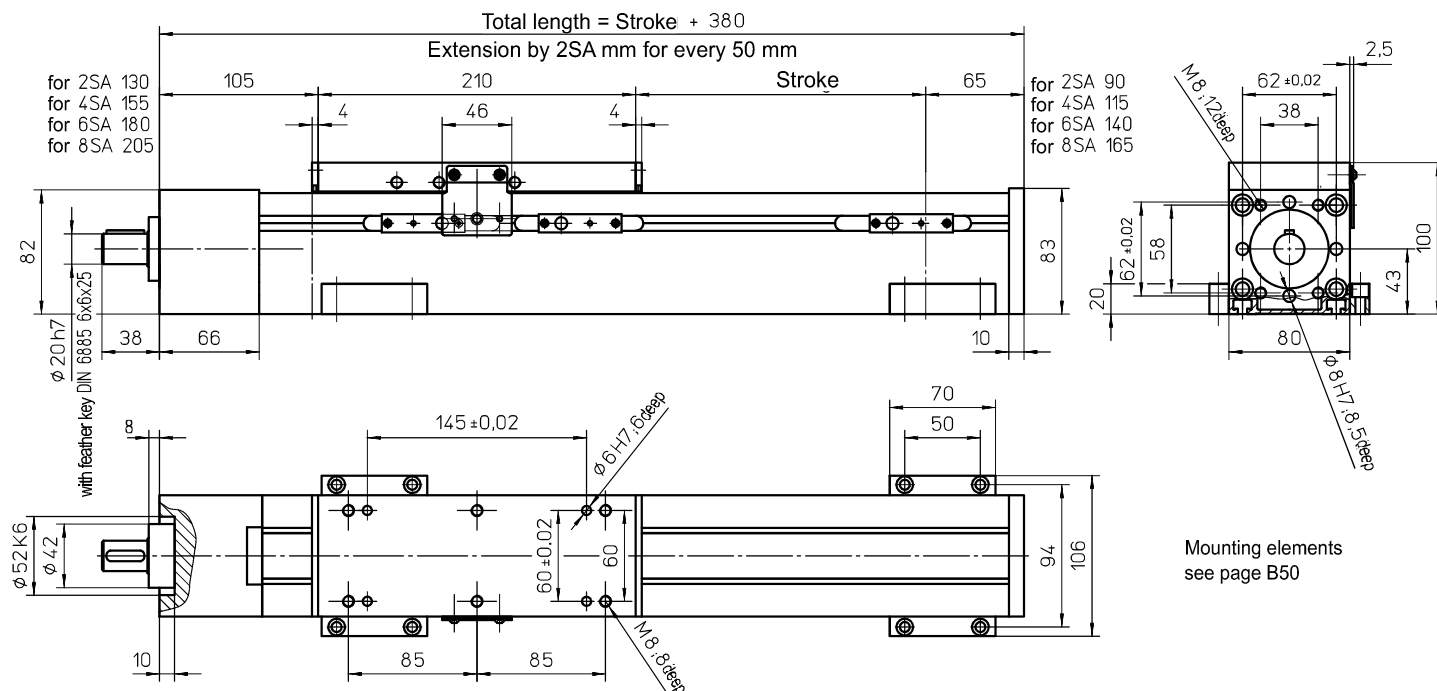

Weights

SGV


Basic length without stroke:	6.40 kg
100 mm stroke:	0.95 kg
Entire carriage 210 mm:	1.60 kg
Max. total length:	5600 mm
(longer on request)	

Technical Data

SGV

Max. speed:	2.50 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	1.00 Nm

Forces and moments

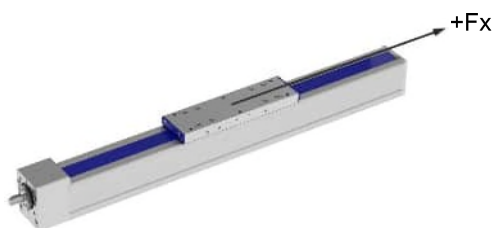

	SGV
Forces	Dynamic [N]
F _x	6000
F _y	-
F _z	-
-F _z	-
Moments	Dynamic [Nm]
M _x	-
M _y	-
M _z	-


"-" => Must have an external guide.

Drive element

KGT

Max. rotation speed:	3000 min ⁻¹
Diameter:	25 mm
Pitch:	5 / 10 / 25 / 50 mm
Moment of inertia:	2.25 • 10 ⁻⁴ kgm ² /m

Spindle support (SA)

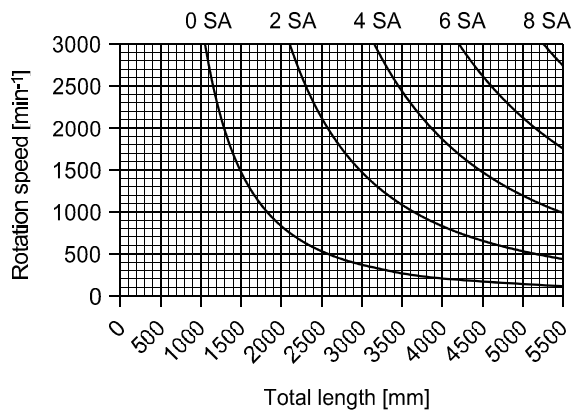

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

Technical Drawing of HSD 6885 6x6x30 Linear Guide System

Top View:

- Total length = Stroke + 400(460)^{a)} [420(480)^{a)}]^{b)}**
- Stroke:** 210 (270)^{a)}
- End Flange Dimensions:** 95 / [105]^{b)} (width), 46 (radius), 4 (thickness), 85 (inner diameter), 46 (outer diameter), 31 ± 0.02 (height), 62 ± 0.02 (width), 20 (thickness).
- Mounting Holes:** 4x M6: 14 deep.
- Guide Rail Dimensions:** 80 (width), 80 (width), 145 ± 0.02 (205)^{a)} (length), 60 ± 0.02 (height), 60 (height), 70 (width), 50 (width), 94 (height), 106 (height).
- Guide Rail Mounting Holes:** 4x M6: 8 deep.
- Guide Rail End Flange Dimensions:** 41.5 (width), 85 (115)^{a)} (width), 85 (115)^{a)} (width), 60 (height), 60 (height), 70 (width), 50 (width), 94 (height), 106 (height).
- Guide Rail End Flange Mounting Holes:** 4x M6: 8 deep.

Front View:

- Guide Rail Dimensions:** 80 (width), 44 (width), 20 h6 (height), 40 (height), 100 (height).
- Mounting Holes:** 4x M6: 14 deep.

Side View:


- Guide Rail Dimensions:** 80 (width), 44 (width), 20 h6 (height), 40 (height), 100 (height).
- Mounting Holes:** 4x M6: 14 deep.

Notes:

- a) Data in brackets refer to long carriage
- b) Data in square brackets refer to version with cover band
- Mounting elements see page B50

Technical Data	ZRS	ZSS
Max. speed:	8.00 m/s	5.00 m/s
Max. acceleration:	40 m/s ²	
Repeat accuracy:	± 0.08 mm	
Idle torque:	1.80 Nm	
Moment of inertia:	4.20 •10 ⁻³ kgm ²	4.00 •10 ⁻³ kgm ²
Drive element:	Toothed belt 32 AT10	
Stroke per revolution:	210 mm	


Forces and moments

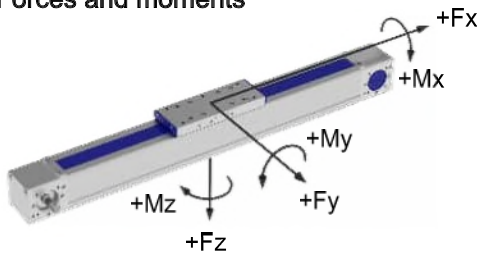


	ZRS	ZSS
Forces	Dynamic [N]	
$F_x^{(d)}$	2200	
F_y	1000	1600
F_z	2500	4000
$-F_z$	1500	3000
Moments	Dynamic [Nm]	
M_x	100	300
M_y	300 (400)	500 (640)
M_z	180 (250)	500 (640)

d) Maximum value (see diagram "F_x-v-Diagram")
Data in brackets refer to long carriage plate (270)

$F_x - v$ - Diagram

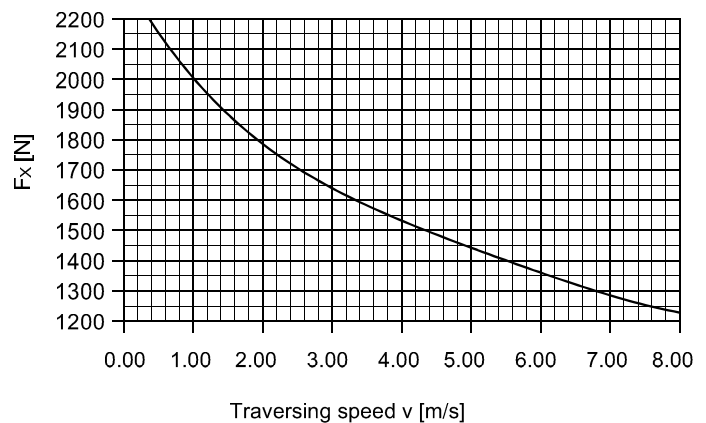

with toothed belt drive and roller guide (ARS) or rail guide (ASS)

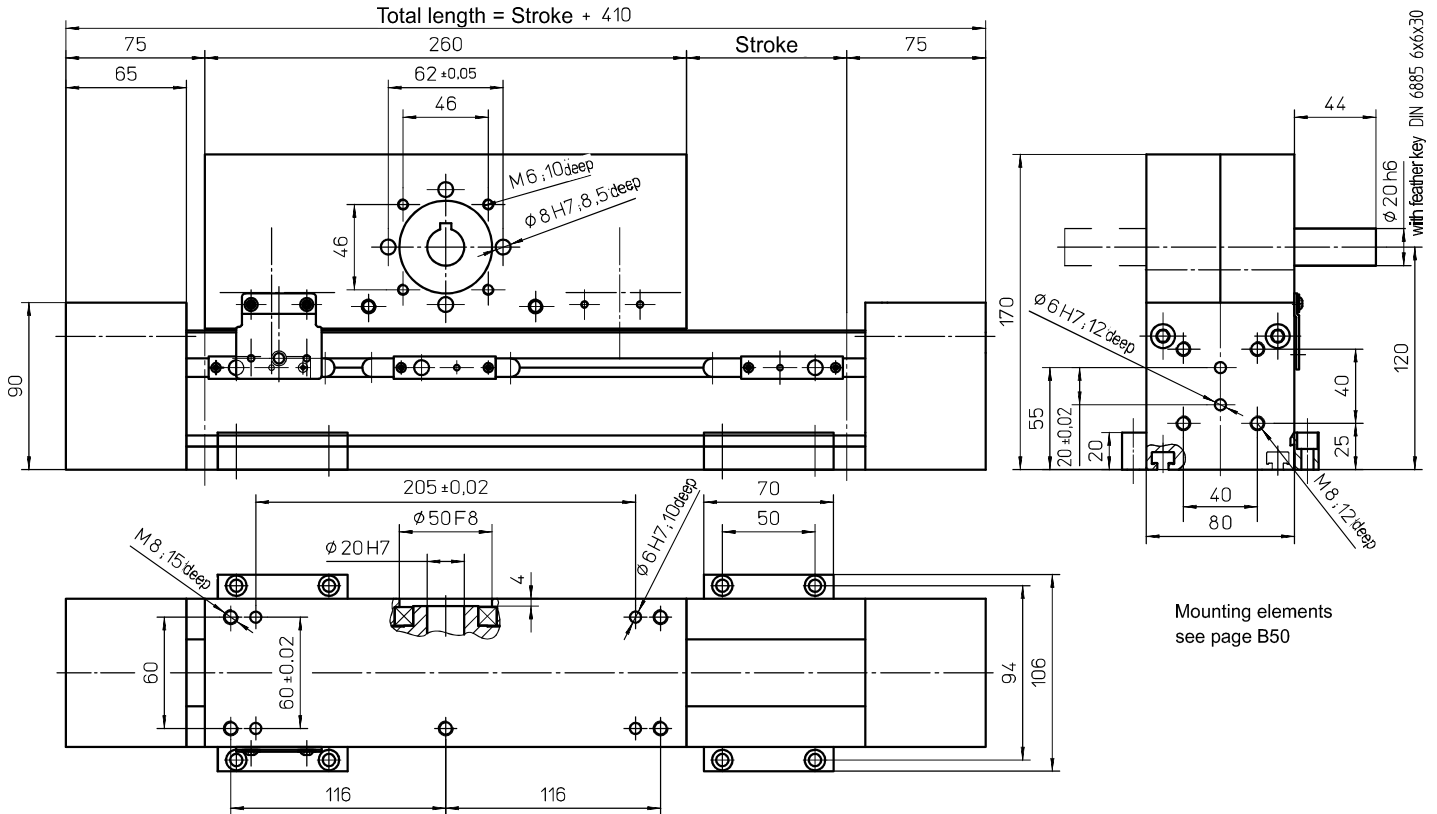


Weights	ARS	ASS
Basic length without stroke:	10.80 kg	12.10 kg
100 mm stroke:	0.63 kg	0.96 kg
Entire carriage 260 mm:	6.30 kg	6.30 kg

Max. total length: 8000 mm
(longer on request)

Technical Data	ARS	ASS
Max. speed:	8.00 m/s	5.00 m/s
Max. acceleration:	40 m/s ²	
Repeat accuracy:	± 0.08 mm	
Idle torque:	1.80 Nm	
Moment of inertia:	9.20 •10 ⁻³ kgm ²	8.60 •10 ⁻³ kgm ²
Drive element:	Toothed belt 32 AT10	
Stroke per revolution:	220 mm	


Forces and moments

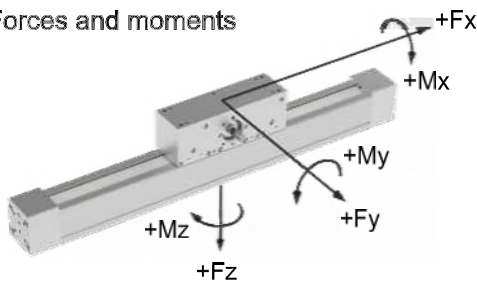

	ARS	ASS
Forces	Dynamic [N]	
$F_x^{(d)}$	1300	
F_y	1000	1600
F_z	2500	4000
$-F_z$	1500	3000
Moments	Dynamic [Nm]	
M_x	100	300
M_y	300	500
M_z	180	500

d) Maximum value (see diagram "F_x-v-Diagram")

$F_x - v$ - Diagram

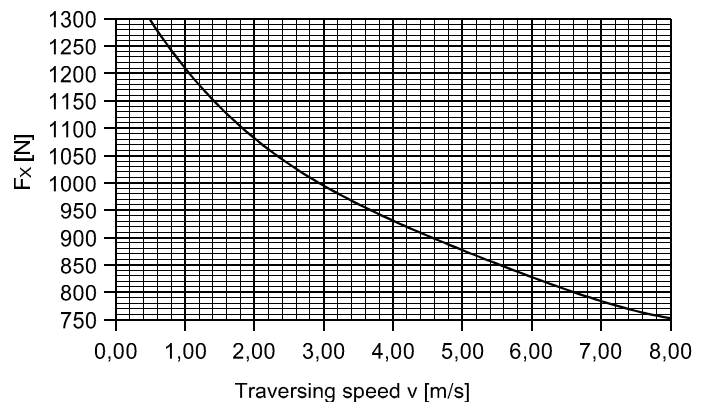

For mechanical linear drives with roller guide, the static load rating “C_{stat}” (page TL 11) applies for static loads.

Technical drawing of the B50 long carriage, showing front, side, and detail views with dimensions and callouts.

Front View Dimensions:

- Total length = Stroke + 480(600)^{a)} [500(620)^{a)}]^{c)}
- 100 / [110]^{c)}
- 280 (400)^{a)}
- Stroke
- 100 / [110]^{c)}
- 46
- 137
- 46
- 62 ±0.02
- 80
- 46
- 85
- 31 ±0.02
- 20

Side View Dimensions:

- 160 ±0.02 (280)^{a)}
- 70
- 50
- 114
- 126
- 80 ±0.02
- 80
- 200 (320)^{a)}
- 41.5

Detail View Dimensions:

- 20.5
- 100
- 34 (46)^{b)}
- 105
- 4.4
- φ 20 h6
- with feather key DIN 6885 6x6x25

Callouts:

- M6:4.5deep
- M6:10deep
- φ 50 F8
- φ 20 H7
- φ 8: H7/6deep
- M10:15deep
- φ 8: H7/6deep

Notes:


- a) Data in brackets refer to long carriage
- b) Data in brackets refer to version GX
- c) Data in square brackets refer to version with cover band

Mounting elements
see page B50

Technical Data	ZRS	ZSS
Max. speed:	8.00 m/s	5.00 m/s
Max. acceleration:	40 m/s ²	
Repeat accuracy:	± 0.08 mm	
Idle torque:	2.50 Nm	
Moment of inertia:	1.30 •10 ⁻² kgm ²	1.26 •10 ⁻² kgm ²
Drive element:	Toothed belt 40 AT10	
Stroke per revolution:	200 mm	


A 3D perspective diagram of a beam element. The beam is a long, thin rectangular prism with a blue longitudinal slot. At the right end, a coordinate system is defined with three axes: a vertical axis pointing upwards labeled $+F_z$, a horizontal axis pointing to the right labeled $+F_x$, and a diagonal axis pointing downwards and to the right labeled $+F_y$. Corresponding moment arrows are shown: $+M_z$ (curved arrow around the vertical axis), $+M_x$ (curved arrow around the horizontal axis), and $+M_y$ (curved arrow around the diagonal axis).

$F_x - v$ - Diagram

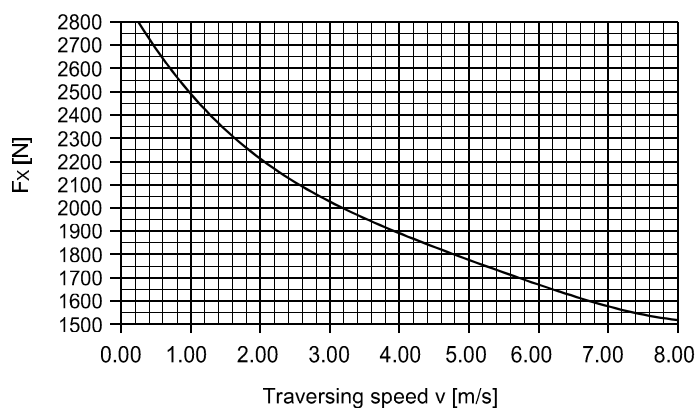

For mechanical linear drives with roller guide, the static load rating “ C_{stat} ” (page TL 11) applies for static loads.

with toothed belt drive and double linear guide (ZSS)

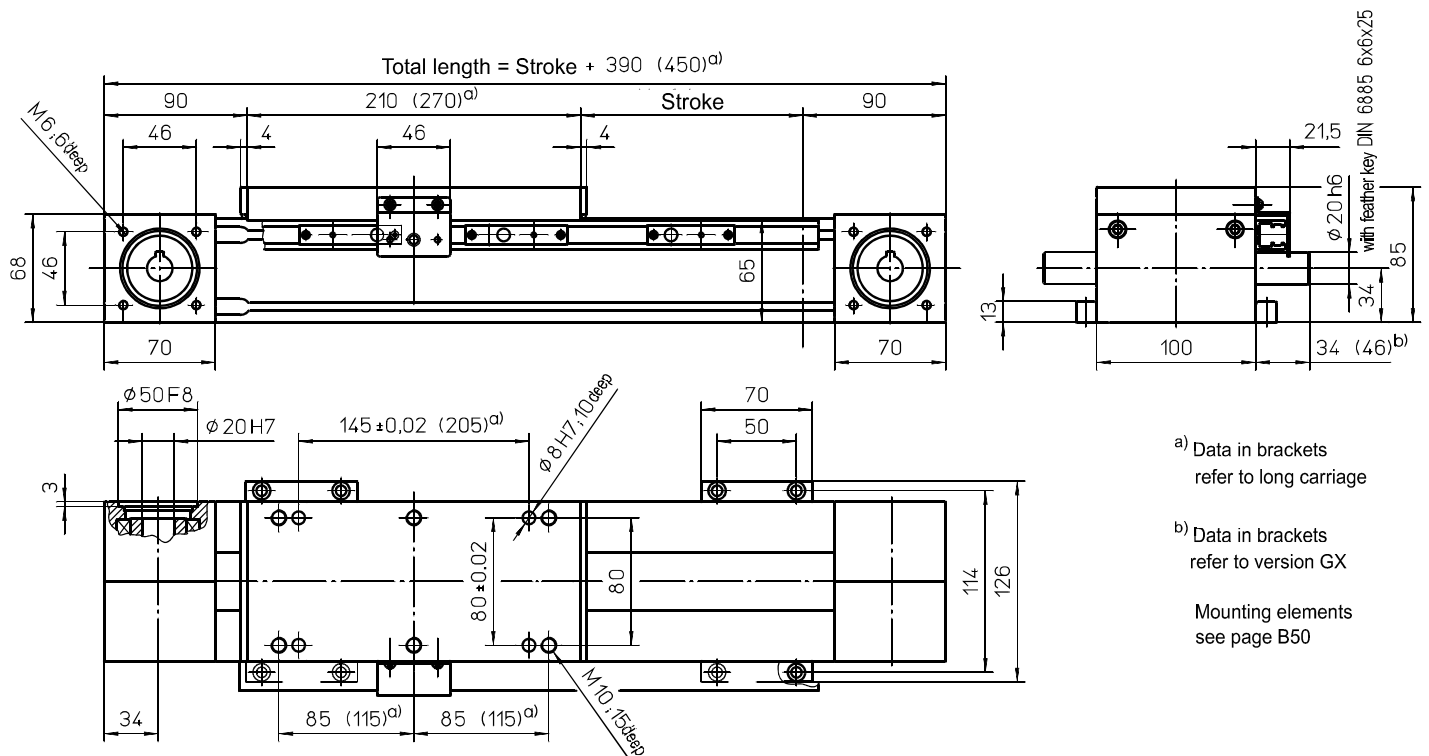


Weights ZSS

Basic length without stroke:	6.80 kg
100 mm stroke:	0.75 kg
Entire carriage 210 mm:	3.50 kg
Entire carriage 270 mm:	4.10 kg
Max. total length: (longer on request)	8100 mm

Technical Data ZSS

Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	5.00 Nm
Moment of inertia:	2.80 • 10 ⁻³ kgm ²
Drive element:	Toothed belt 40 AT10-E
Stroke per revolution:	160 mm


Forces and moments

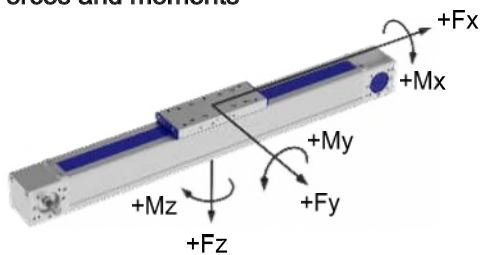


Forces	ZSS Dynamic [N]
F _x ^{d)}	1500
F _y	1800
F _z	4000
-F _z	3000
Moments	ZSS Dynamic [Nm]
M _x	350
M _y	750 (1000)
M _z	750 (1000)

^{d)} Maximum value (see diagram "F_x-v-Diagram")
Data in brackets refer to long carriage plate (270)

F_x - v - Diagram

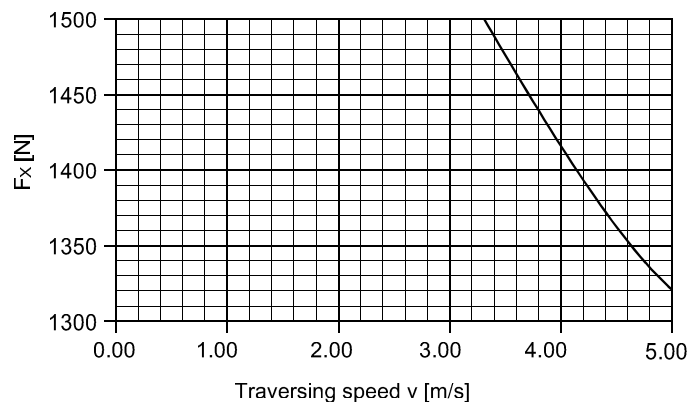

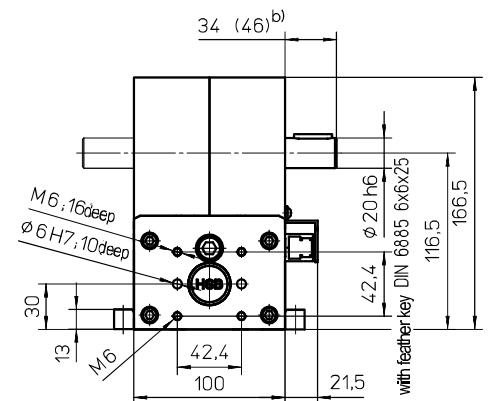[illegible]

Mounting elements
see page B50


Technical Data	ASS
Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	2.50 Nm
Moment of inertia:	1.20 •10 ⁻² kgm ²
Drive element:	Toothed belt 40 AT10-E
Stroke per revolution:	240 mm

forces and moments


A 3D diagram of a beam element. A central rectangular block represents the beam. Six arrows originate from its center: $+F_x$ (pointing right), $+M_x$ (curved arrow around the x-axis), $+F_y$ (pointing down), $+M_y$ (curved arrow around the y-axis), $+F_z$ (pointing up), and $+M_z$ (curved arrow around the z-axis).

	ASS
Forces	Dynamic [N]
$F_x^{(d)}$	2200
F_y	1800
F_z	4000
$-F_z$	3000
Moments	Dynamic [Nm]
M_x	350
M_y	950
M_z	950

$F_x - v$ - Diagram

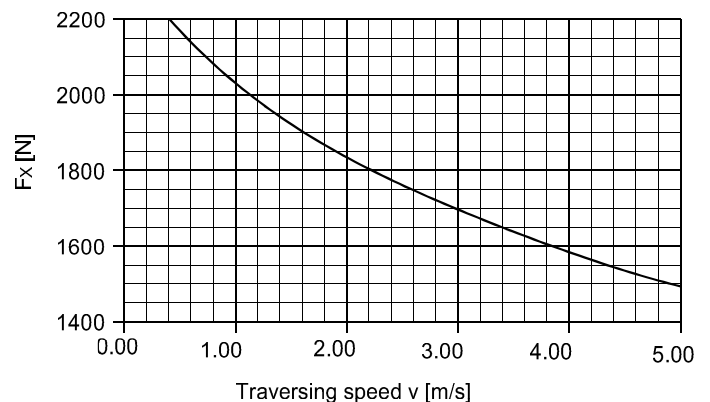

with ball screw (KGT) and double linear guide (SSS)

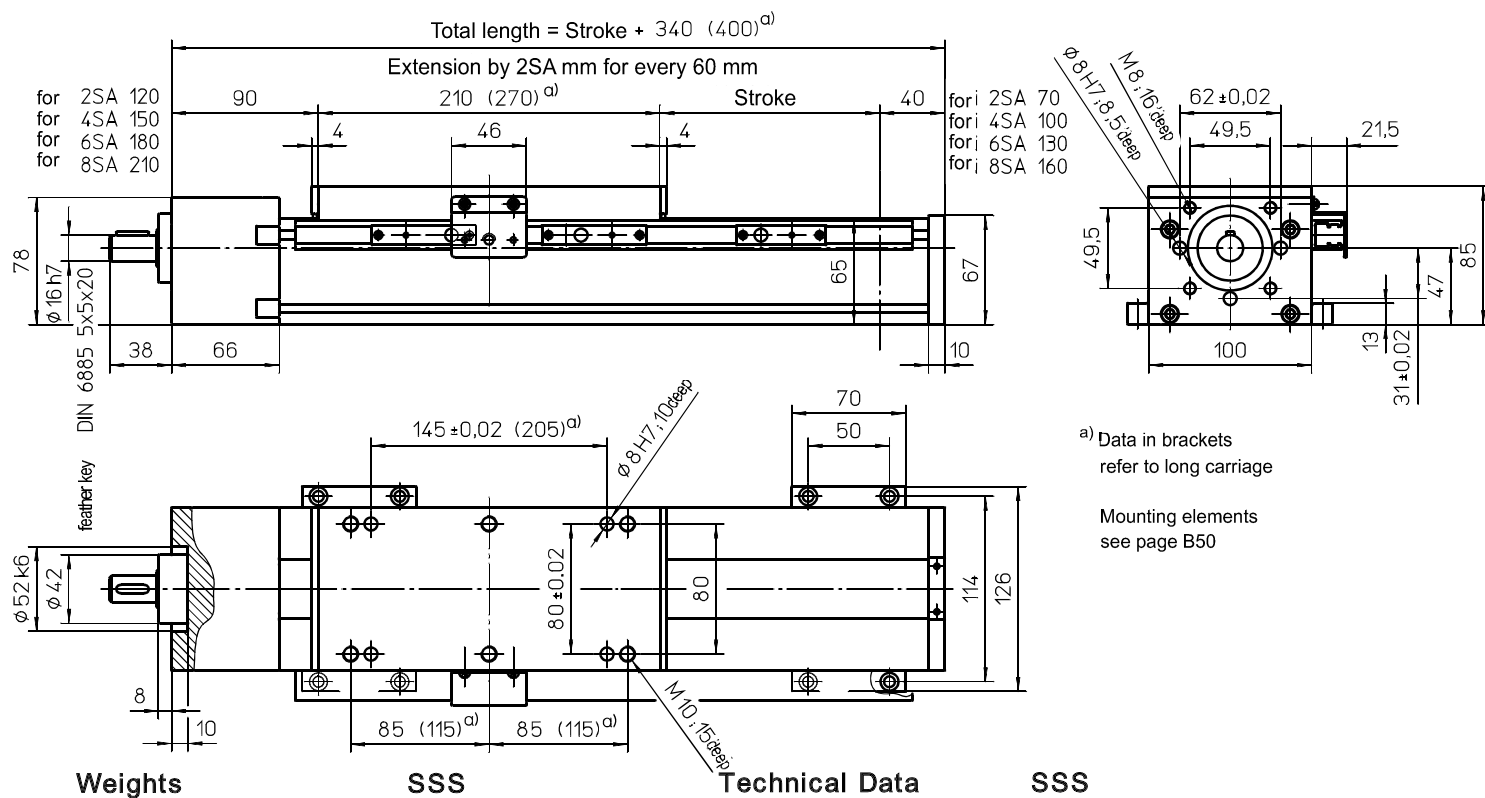

Weights

Basic length without stroke:	6.20 kg
100 mm stroke:	0.75 kg
Entire carriage 210 mm:	3.40 kg
Entire carriage 270 mm:	4.00 kg

Max. total length: 5600 mm
(longer on request)


SSS

Technical Data

Max. speed:	2.50 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	1.30 Nm

SSS

Forces and moments

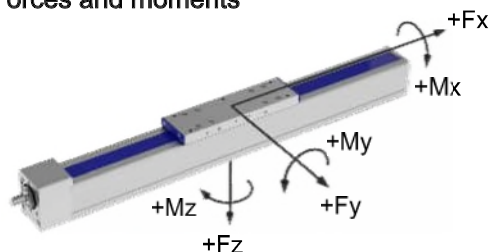


	SSS
Forces	Dynamic [N]
F_x	4000
F_y	1800
F_z	4000
$-F_z$	3000
Moments	Dynamic [Nm]
M_x	350
M_y	750 (1000)
M_z	750 (1000)

Data in brackets refer to long carriage plate (270)

Drive element

Max. rotation speed: 3000 min⁻¹
Diameter: 20 mm
Pitch: 5 / 10 / 20 / 50 mm
Moment of inertia: 8.40 • 10⁻⁵ kgm²/m


Spindle support (SA)

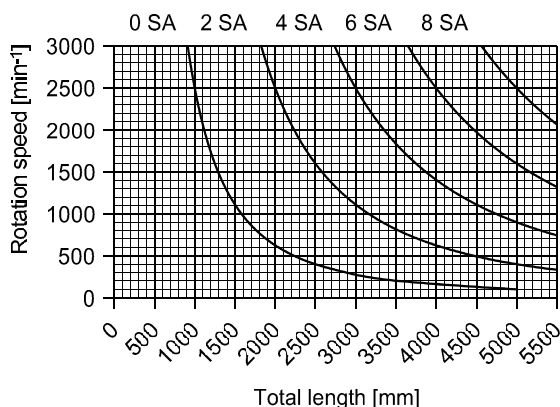

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)
Version with double nut not possible.

[illegible]Page B20

with toothed belt drive and roller guide (ARS) or rail guide (ASS)

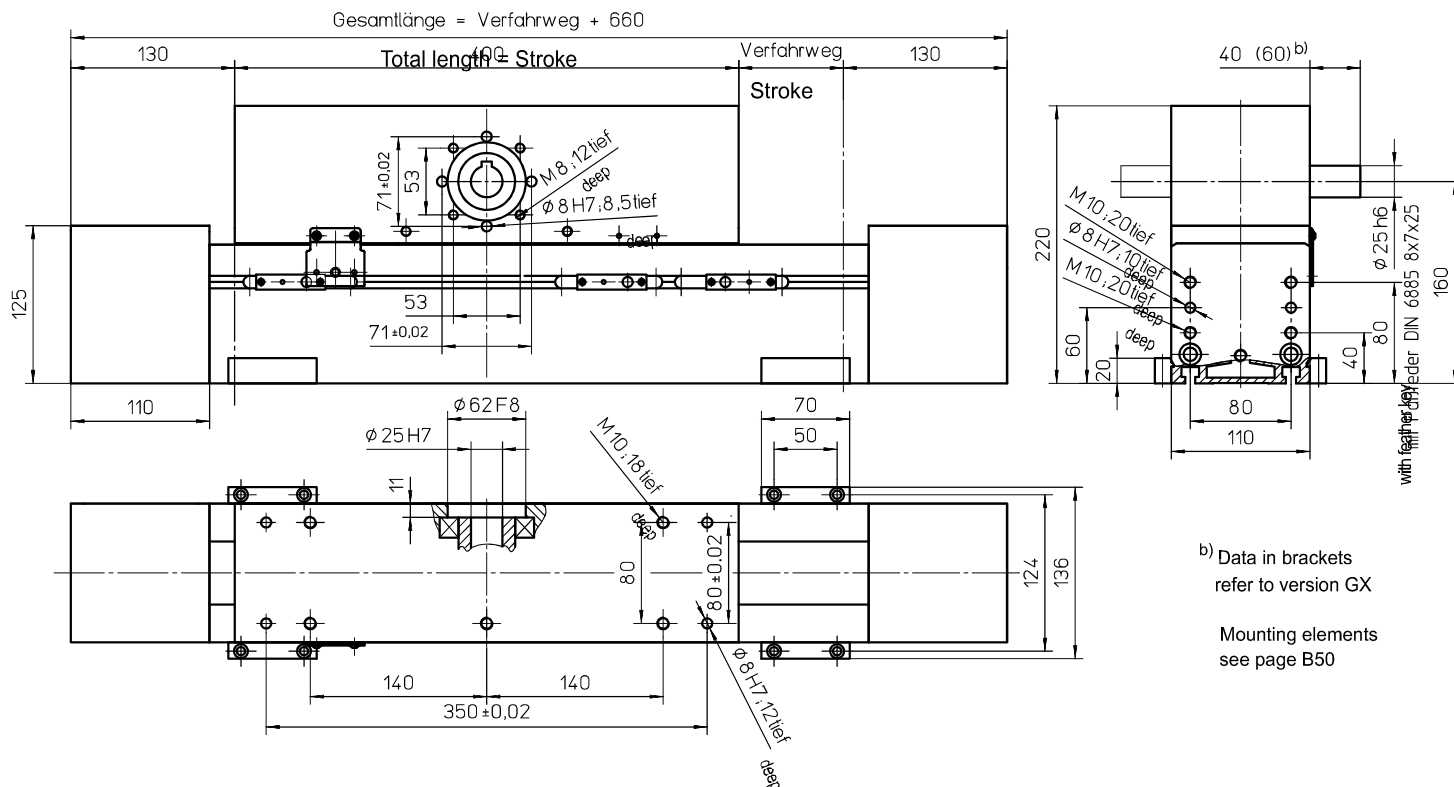


Weights	ARS	ASS
Basic length without stroke:	27.00 kg	29.00 kg
100 mm stroke:	1.20 kg	1.40 kg
Carriage drive 400 mm:	15.00 kg	16.00 kg

Max. total length: 8100 mm
(longer on request)

Technical Data	ARS	ASS
Max. speed:	8.00 m/s	5.00 m/s
Max. acceleration:	60 m/s ²	
Repeat accuracy:	± 0.08 mm	
Idle torque:	3.50 Nm	
Moment of inertia:	3.50 • 10 ⁻² kgm ²	3.70 • 10 ⁻² kgm ²
Drive element:	Toothed belt 50 AT10-E	
Stroke per revolution:	300 mm	


Forces and moments

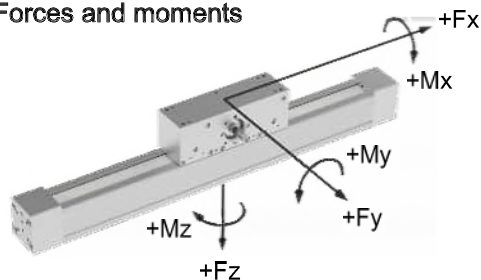

	ARS	ASS
Forces	Dynamic [N]	
F _x ^{d)}	2000	
F _y	2000	3000
F _z	5000	8000
-F _z	2500	4000
Moments	Dynamic [Nm]	
M _x	300	400
M _y	600	800
M _z	450	600

^{d)} Maximum value (see diagram "F_x-v-Diagram")

F_x - v - Diagram

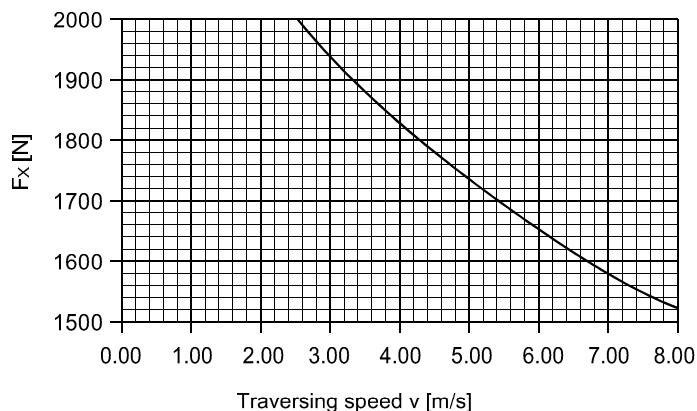

For mechanical linear drives with roller guide, the static load rating "C_{stat}" (page TL 11) applies for static loads.

Technical Drawing of the B50 Linear Guide System

Top View (Side View):

- Total length:** $\text{Stroke} + 480 \text{ (660)}^a$
- Extension:** 2SA mm for every 60 mm
- Dimensions:** 105, 320 (500)^a, 46, 4, 55, 110, 113, 10, 45, 66.
- Mounting:** with feather key DIN 6885 6x6x25
- Shaft Diameter:** $\phi 20 \text{ h7}$

Front View:

- Dimensions:** 230 ± 0.02 (430)^a, 80, 80 ± 0.02 , 100 (200)^a, 100 (200)^a, 70, 50, 124, 136, 11, 7.
- Shaft Diameter:** $\phi 8 \text{ H7} / 10 \text{ deep}$
- Mounting Hole:** M10: 15 deep


Detail View (Right):

- Dimensions:** 71 ± 0.02 , 53, 2.5, 53, 20, 110, 35.5 ± 0.02 , 74, 135.
- Mounting Holes:** M8: 15 deep, $\phi 8 \text{ H7} / 8.5 \text{ deep}$

Notes:

- ^a Data in brackets refer to long carriage
- Mounting elements see page B50

Forces and moments

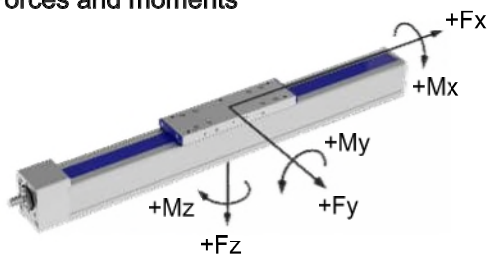

	SRS	SSS
Forces	Dynamic [N]	
F_x	6000	
F_y	2000	3000
F_z	5000	8000
-F_z	2500	4000
Moments	Dynamic [Nm]	
M_x	300	400
M_y	600 (800)	800 (1200)
M_z	450 (550)	600 (800)

Data in brackets refer to long carriage plate (500)

For mechanical linear drives with roller guide, the static load rating “C_{stat}” (page TL 11) applies for static loads.


Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

Version with double nut ("MM") only available with pitch "5", "10" and "25".


Technical Data	SRS	SSS
Max. speed:	2.50 m/s	
Max. acceleration:	20 m/s ²	
Repeat accuracy:	± 0.03 mm (KGT)	
Idle torque:	1.00 Nm	1.50 Nm

Drive element	KGT
Max. rotation speed:	3000 min ⁻¹
Diameter:	25 mm
Pitch:	5 / 10 / 25 / 50 mm
Moment of inertia:	2.25 • 10 ⁻⁴ kgm ² /m

Spindle support (SA)

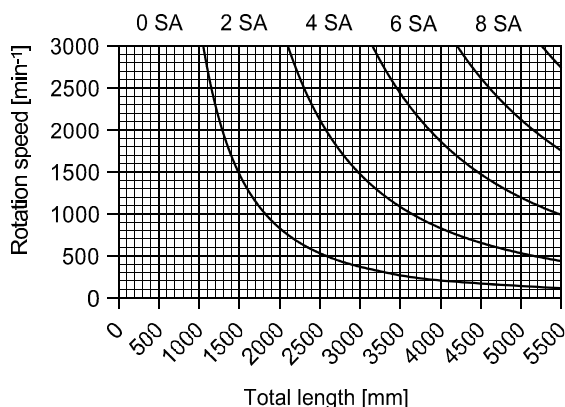


with ball screw (KGT) and sliding guide (SGV)

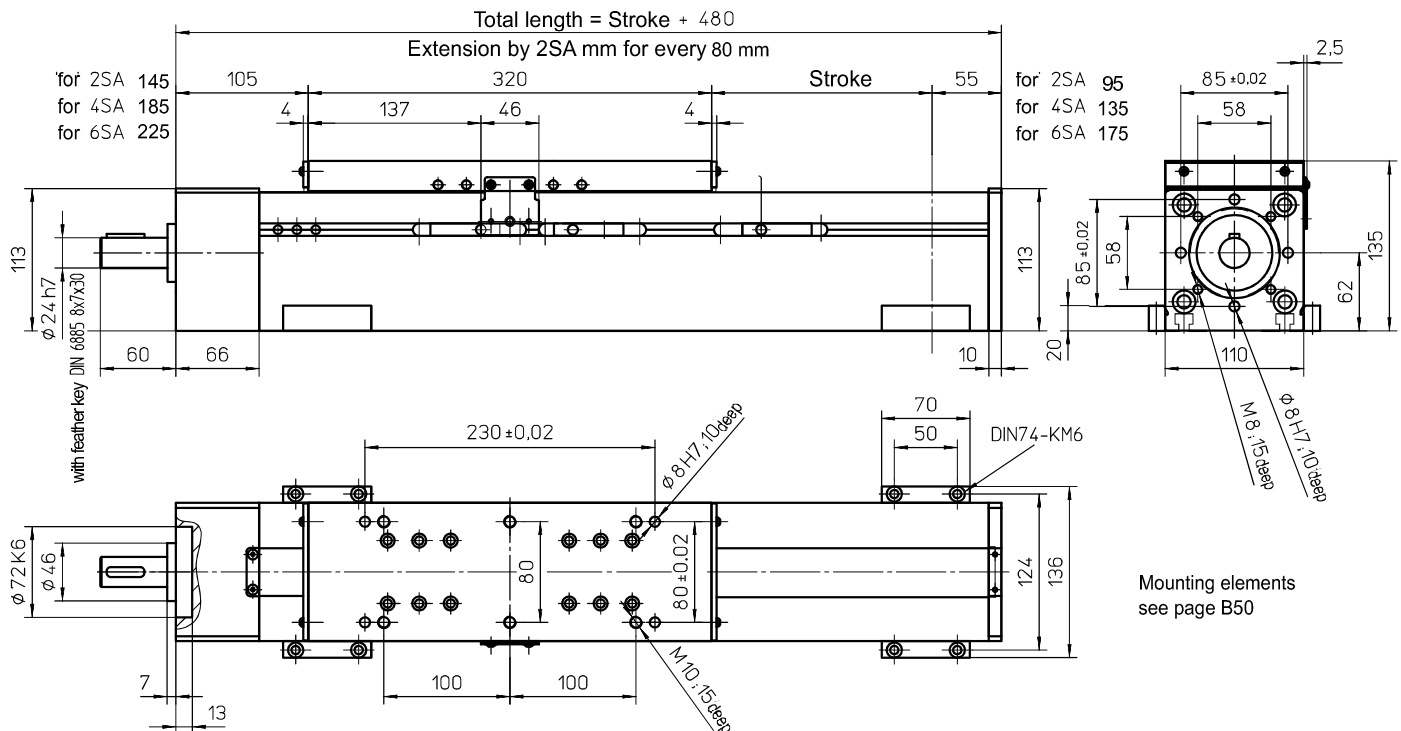

Weights	SGV
Basic length without stroke:	15.40 kg
100 mm stroke:	2.25 kg
Entire carriage 320 mm:	6.00 kg
Max. total length:	5600 mm

Technical Data	SGV
Max. speed:	3.0 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	1.50 Nm

Forces and moments

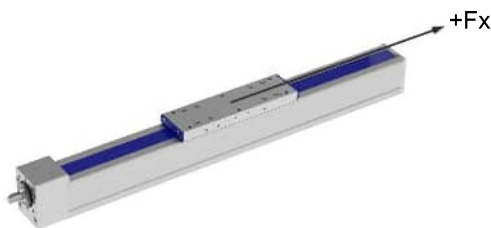


	SGV
Forces	Dynamic [N]
F_x	16000*
F_y	-
F_z	-
$-F_z$	-
Moments	Dynamic [Nm]
M_x	-
M_y	-
M_z	-

“ - ” => Must have an external guide.

Drive element KGT

Max. rotation speed:	3000 min ⁻¹	
Diameter:	32 / 40 mm	
Pitch:	5 / 10 / 20 / 40 / 60* mm	* only ø32
Moment of inertia:	6.39 • 10 ⁻⁴ kgm ² /m (32)	
	1.34 • 10 ⁻³ kgm ² /m (40)	

Spindle support (SA)

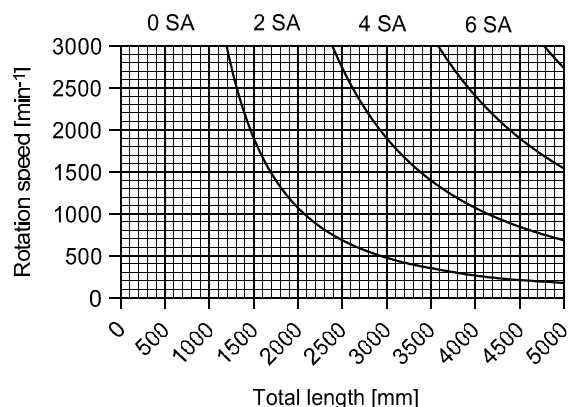

* for KGT size 32: 12000 N / for 3240 and 3260: 8000 N

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

Only single nut design ("M") possible.

Technical Drawing of the B50 Linear Guide System

Top View (Front View):

- Total length = Stroke + 580 (760)^{a)}**
- Stroke** is indicated for the central section.
- Dimensions: 130, 320 (500)^{a)}, 130, 140, 40, 4, 18, 71 ± 0.02.
- Annotations: $\phi 8 \text{ H7 } 1/2 \text{ deep}$, $M 8 \cdot 1/2 \text{ deep}$.
- Mounting elements: $\phi 62 \text{ F8}$, $\phi 25 \text{ H7}$.

Side View:

- Dimensions: 17.5, 120, 40 (60)^{b)}, 117, 45.5, 21.5.
- Annotations: $\phi 25 \text{ h6}$, *with feather key DIN 6885 8x7x25*.

Bottom View:

- Dimensions: 16, 50, 100 ± 0.02, 100, 235 ± 0.02 (332)^{a)}, 70, 50, 134, 146, 100 (190)^{a)}, 100 (190)^{a)}, 270 (450)^{a)}.
- Annotations: $\phi 8 \text{ H7 } 1/10 \text{ deep}$, $M 10 \cdot 15 \text{ deep}$.


Notes:

- a) Data in brackets refer to long carriage
- b) Data in brackets refer to version GX
- Mounting elements see page B50

Mounting elements
see page B50

Page B24

with toothed belt drive and rail guide (ZSS)

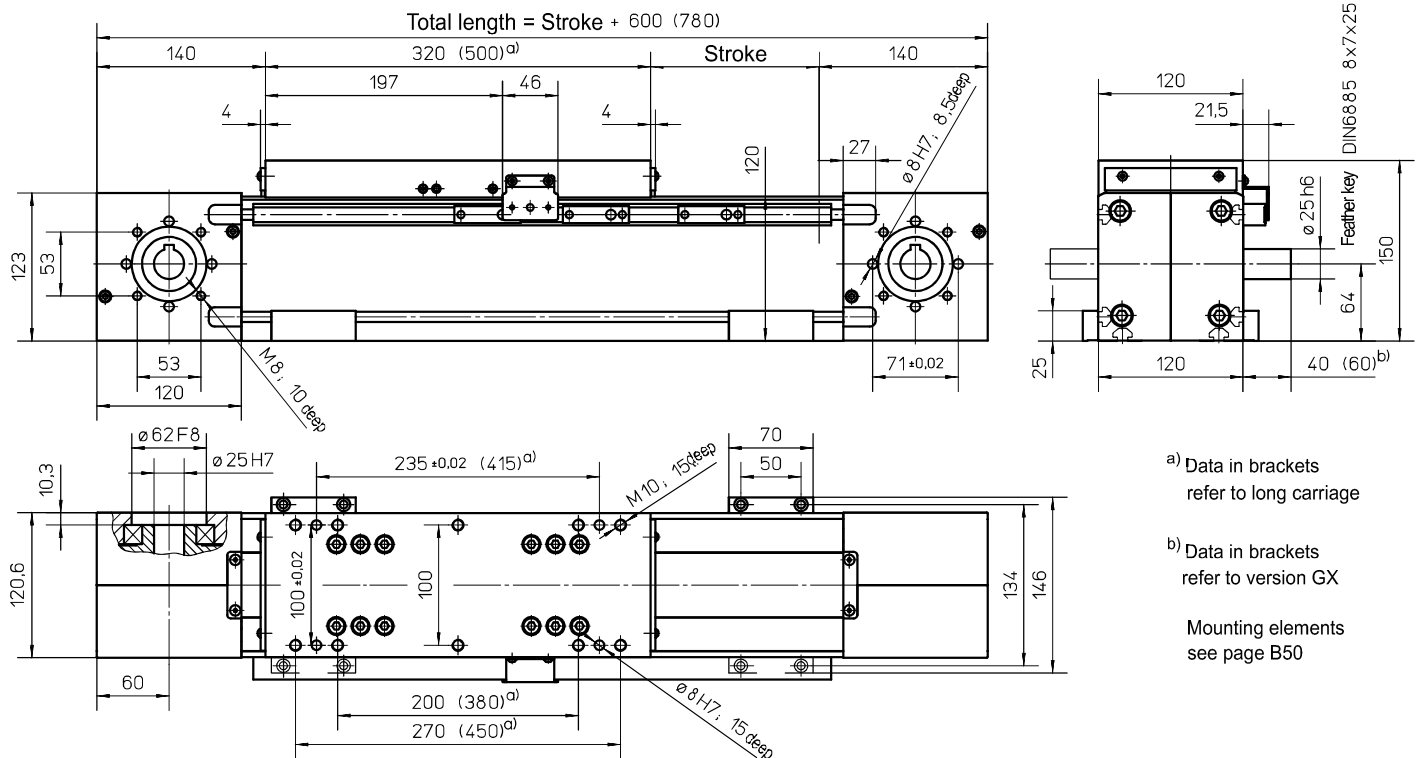

Weights

ZSS


Basic length without stroke:	21.0 kg
100 mm stroke:	2.40 kg
Entire carriage 320 mm:	8.00 kg
Entire carriage 500 mm:	12.00 kg
Max. total length: (longer on request)	8100 mm

Technical Data

ZSS

Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	4.50 Nm
Moment of inertia:	2.10 • 10 ⁻² kgm ²
Drive element:	Toothed belt 60 ATL10
Stroke per revolution:	300 mm


Forces and moments

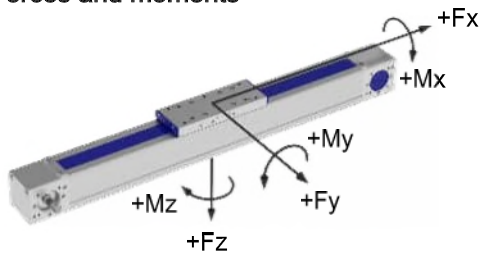


	ZSS
Forces	Dynamic [N]
$F_x^{d)}$	4800
F_y	4000
F_z	12000
$-F_z$	6000
Moments	Dynamic [Nm]
M_x	600
M_y	1500 (2800)
M_z	1000 (1800)

d) Maximum value (see diagram "F_x-v-Diagram")
Data in brackets refer to long carriage plate (500)

F_x - v - Diagram

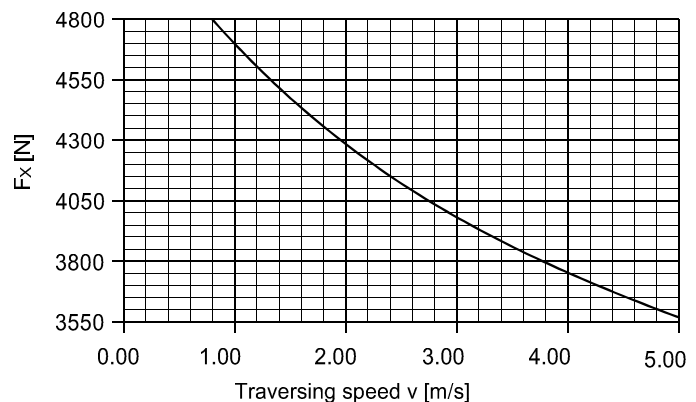

with ball screw (KGT) or rail guide (ZSS)

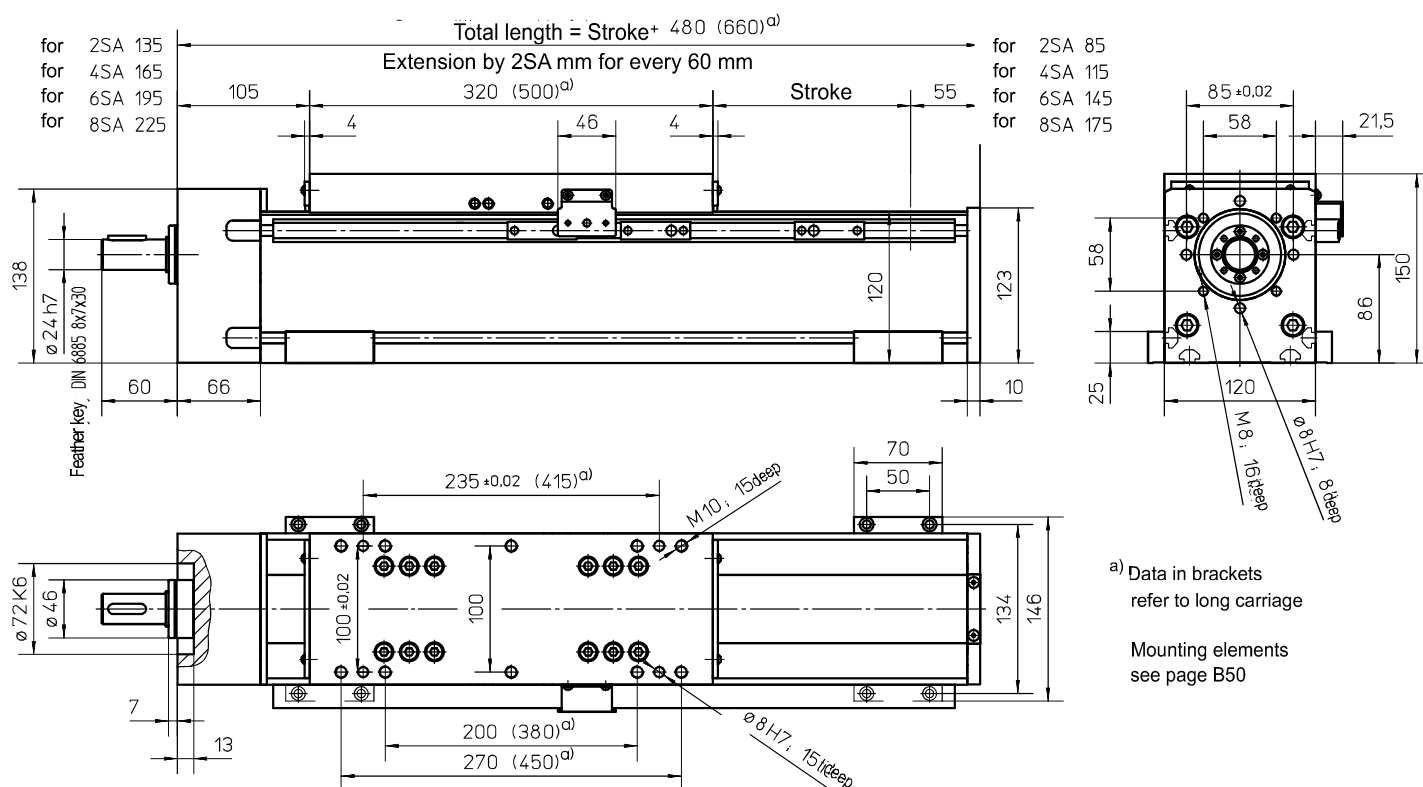

Weights

SSS

Basic length without stroke:	22.00 kg
100 mm stroke:	2.70 kg
Entire carriage 320 mm:	8.00 kg
Entire carriage 500 mm:	12.00 kg


Max. total length:
(longer on request) 5600 mm

Technical Data

SSS

Max. speed:	3.00 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	2.00 Nm

Forces and moments

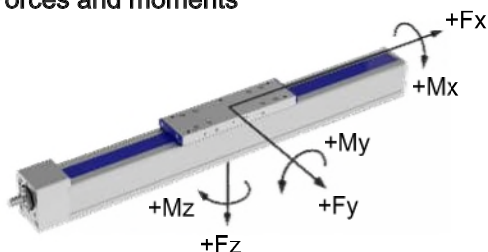

	SSS
Forces	Dynamic [N]
F _x	12000 *
F _y	4000
F _z	12000
-F _z	6000
Moments	Dynamic [Nm]
M _x	600
M _y	1500 (2800)
M _z	1000 (1800)

Data in brackets refer to long carriage plate (500)


* at KGT3240 and 3260: 8000 N

Drive element

KGT

Max. rotation speed:	3000 min ⁻¹
Diameter:	32 mm
Pitch:	5 / 10 / 20 / 40 / 60 mm
Moment of inertia:	6.39 · 10 ⁻⁴ kgm ² /m


Spindle support (SA)

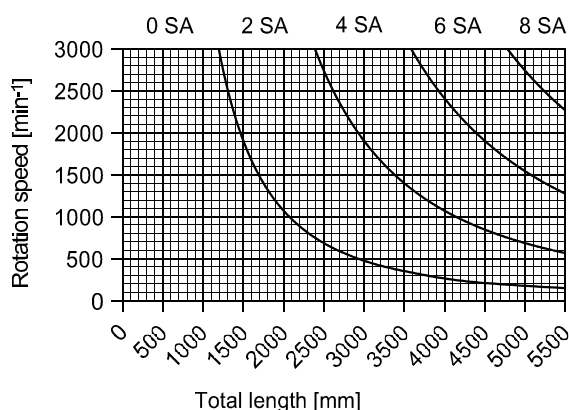

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

Version with double nut ("MM") only available with long carriage (500 mm) and pitch "5", "10" or "20".


with toothed belt drive and roller guide (ZRS) or double linear guide (ZSS)

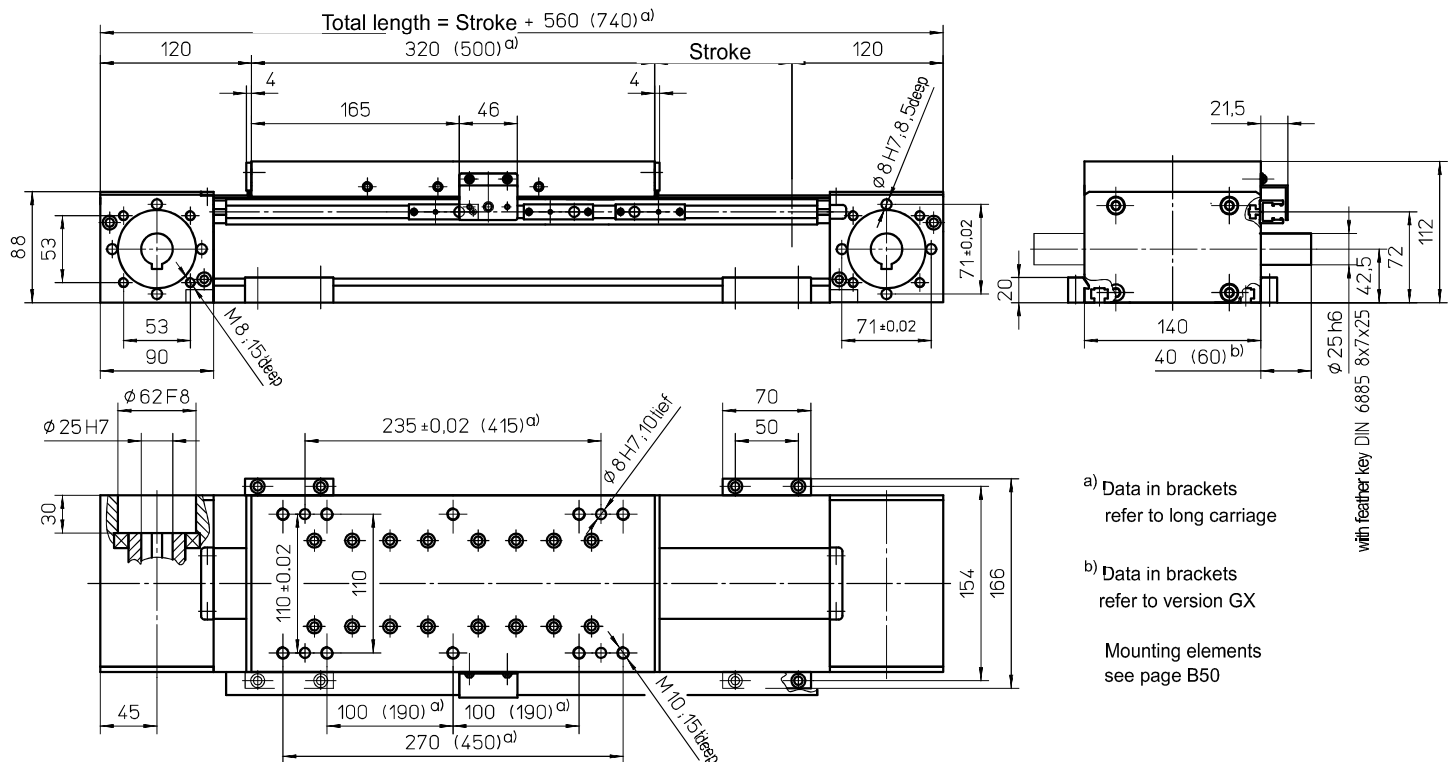

Weights	ZRS	ZSS
Basic length without stroke:	13.50 kg	15.00 kg
100 mm stroke:	1.30 kg	1.70 kg
Entire carriage 320 mm:	7.00 kg	7.50 kg
Entire carriage 500 mm:	11.00 kg	11.70 kg

Max. total length: 8100 mm
(longer on request)

Forces and moments

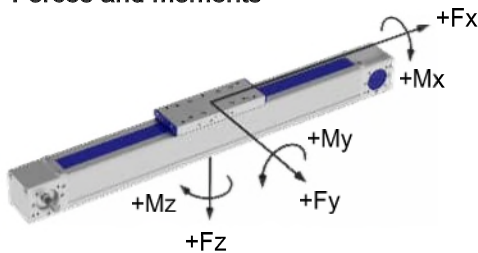

	ZRS	ZSS
Forces	Dynamic [N]	
$F_x^{(d)}$	4000	
F_y	2500	
F_z	5000	6000
$-F_z$	3000	4000
Moments	Dynamic [Nm]	
M_x	350	500
M_y	700 (900)	1000 (1300)
M_z	500 (900)	1000 (1300)


d) Maximum value (see diagram "F_x-v-Diagram")

Data in brackets refer to long carriage plate (500)

Technical Data	ZRS	ZSS
----------------	-----	-----

Max. speed:	8.00 m/s	5.00 m/s
Max. acceleration:	60 m/s ²	
Repeat accuracy:	± 0.08 mm	
Idle torque:	3.50 Nm	
Moment of inertia:	1.90 •10 ⁻² kgm ²	2.00 •10 ⁻² kgm ²
Drive element:	Toothed belt 50 AT10-E	
Stroke per revolution:	220 mm	

$F_x - v$ - Diagram

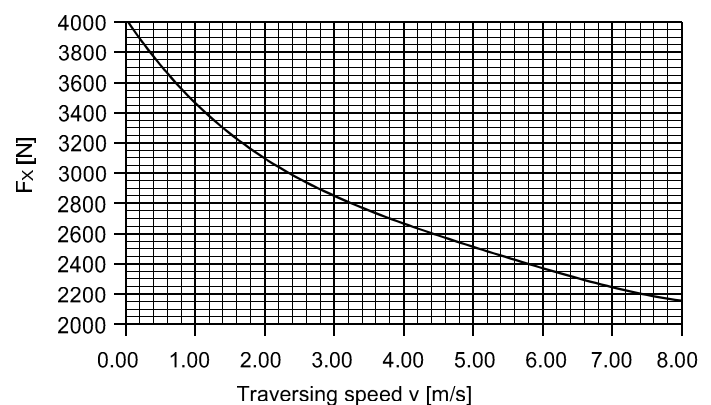

For mechanical linear drives with roller guide, the static load rating " C_{stat} " (page TL 11) applies for static loads.


Technical drawing of a mechanical assembly, showing two views: a side view (top) and a top view (bottom).

Side View (Top):

- Overall length: 300 (380) ^{a)} mm. Stroke: 125 mm.
- Central feature: Diameter 71 ± 0.02 mm, height 35.5 ± 0.02 mm.
- Internal feature: Diameter 53 mm, height 53 mm.
- Surface finish: $\sqrt{0.8}$ H7, 8, 5 deep.
- Mounting holes: M8, 15 deep.

Top View (Bottom):

- Overall length: 270 mm. Central feature: Diameter 62 F8 mm, height 30 mm.
- Central hole: Diameter 25 H7 mm.
- Internal feature: Diameter 62 F8 mm, height 110 mm.
- Surface finish: $\sqrt{0.8}$ H7, 12 deep.
- Mounting holes: M10, 15 deep.
- Dimensions: 110 ± 0.02 mm, 100 mm, 100 mm, 70 mm, 50 mm, 154 mm, 166 mm.

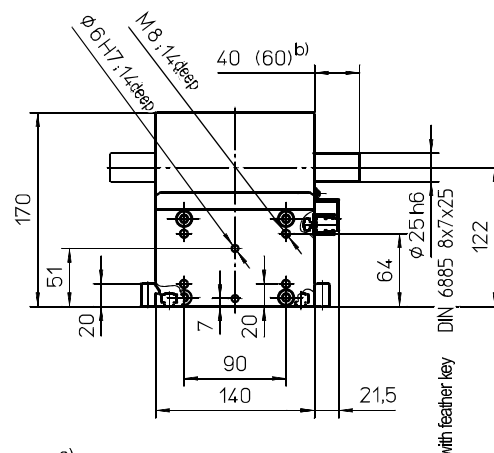


Mounting elements
see page B50



Diagram illustrating forces and moments acting on a beam element. The forces shown are $+F_x$, $+F_y$, and $+F_z$. The moments shown are $+M_x$, $+M_y$, and $+M_z$.

Page B28

with ball screw (KGT) and double linear guide (SSS)

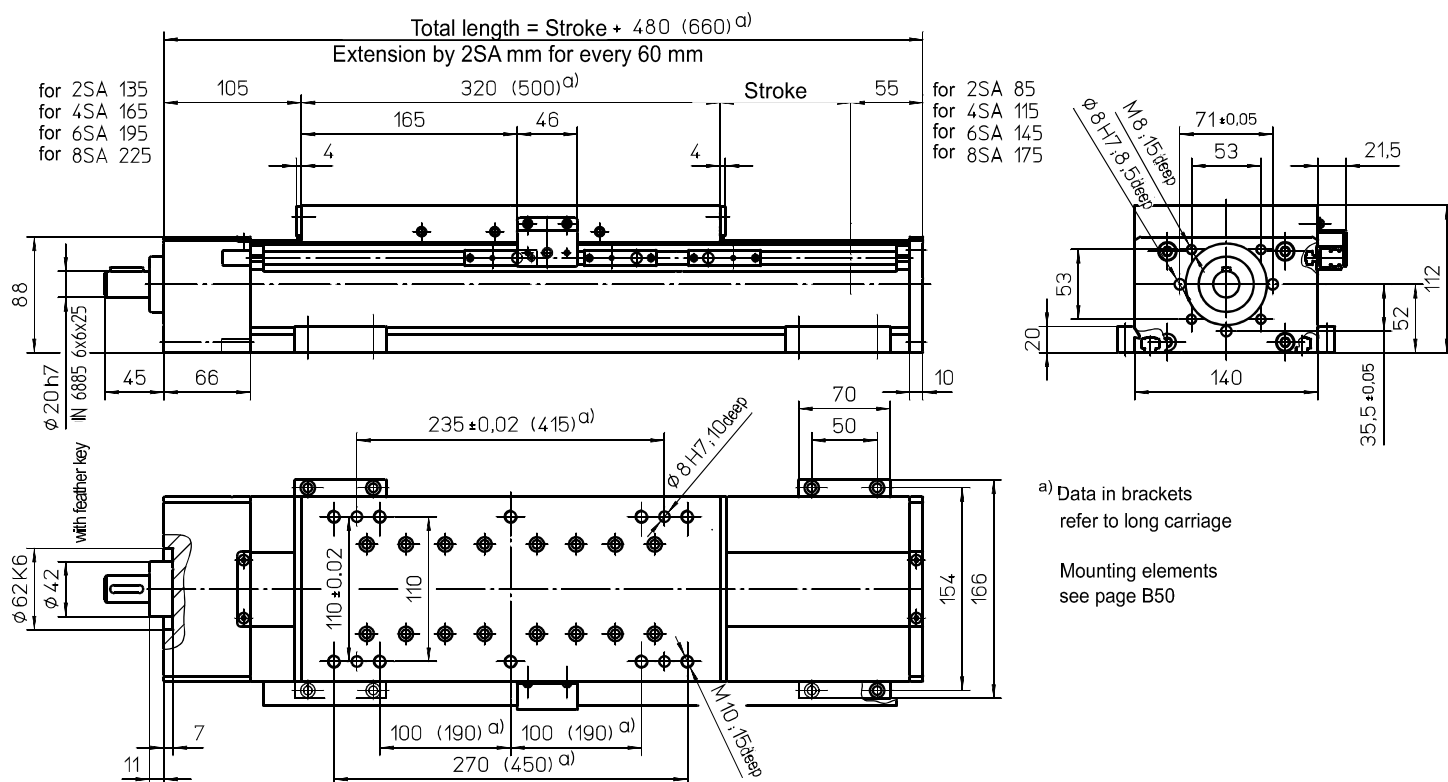

Weights

SSS

Basic length without stroke:	15.00 kg
100 mm stroke:	1.90 kg
Entire carriage 320 mm:	7.00 kg
Entire carriage 500 mm:	10.90 kg

Max. total length 5600 mm

Technical Data

SSS


Max. speed:	2.50 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	±0.03 mm (KGT)
Idle torque:	1.50 Nm

Drive element

KGT

Max. rotation speed:	3000 min ⁻¹
Diameter:	25 mm
Pitch:	5 / 10 / 25 / 50 mm
Moment of inertia:	2,25 · 10 ⁻⁴ kgm ² /m

Forces and moments

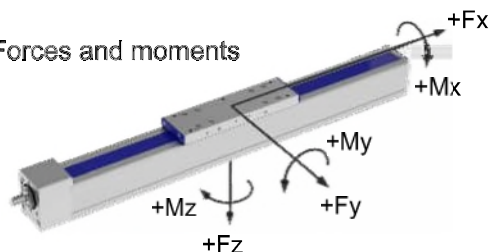

	SSS
Forces	Dynamic [N]
F _x	6000
F _y	2500
F _z	6000
-F _z	4000
Moments	Dynamic [Nm]
M _x	500
M _y	1000 (1400)
M _z	1000 (1400)


Data in brackets refer to long carriage plate (500)

For mechanical linear drives with roller guide, the static load rating "C_{stat}" (page TL 11) applies for static loads.


Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

Version with double nut ("MM") only available with long carriage (500) and not with pitch "50".

Spindle support (SA)

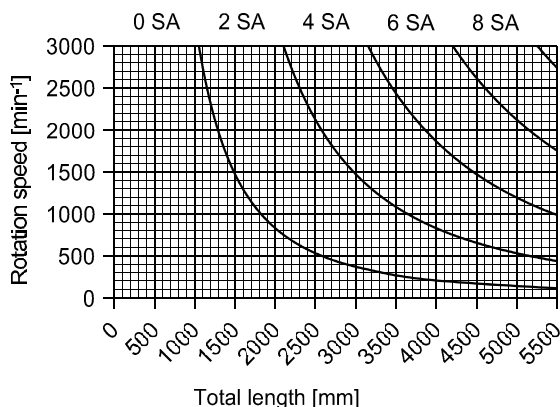

with toothed belt drive and double linear guide (ZSS)

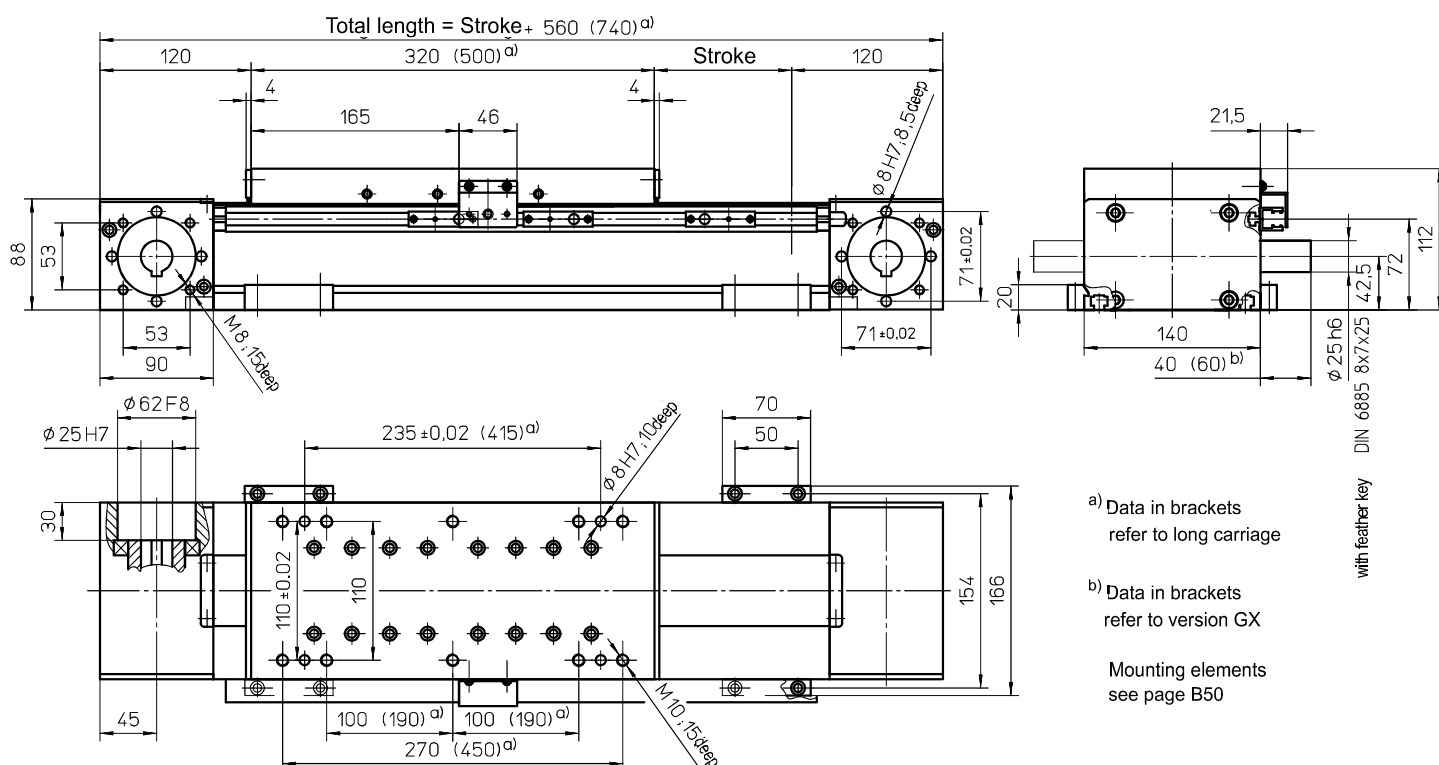

Weights

ZSS


Basic length without stroke:	15.00 kg
100 mm stroke:	1.70 kg
Entire carriage 320 mm:	7.50 kg
Entire carriage 500 mm:	11.70 kg
Max. total length: (longer on request)	8100 mm

Technical Data

ZSS

Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	3.50 Nm
Moment of inertia:	2.00 • 10 ⁻² kgm ²
Drive element:	Toothed belt 50 AT10-E
Stroke per revolution:	220 mm


Forces and moments

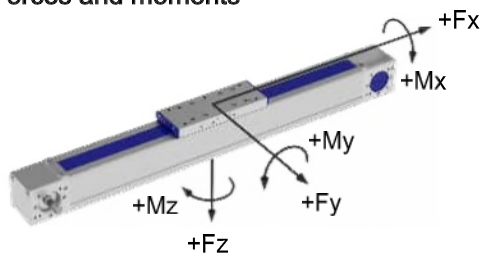


	ZSS
Forces	Dynamic [N]
F _x ^{d)}	4000
F _y	3200
F _z	7500
-F _z	5000
Moments	Dynamic [Nm]
M _x	600
M _y	1200 (1700)
M _z	1200 (1700)

^{d)} Maximum value (see diagram "F_x-v-Diagram")
Data in brackets refer to long carriage plate (500)

F_x - v - Diagram

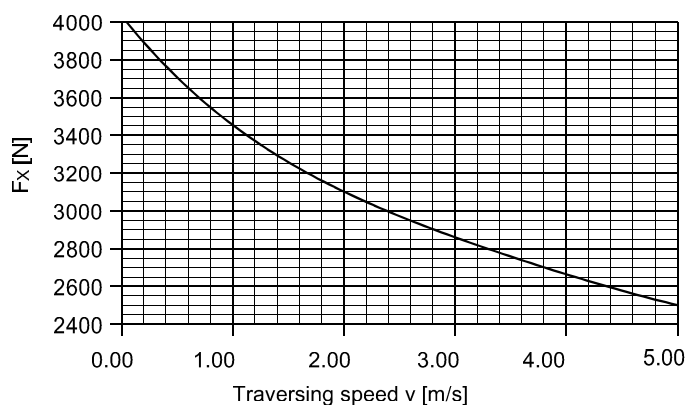

with toothed belt drive and double linear guide (ASS)

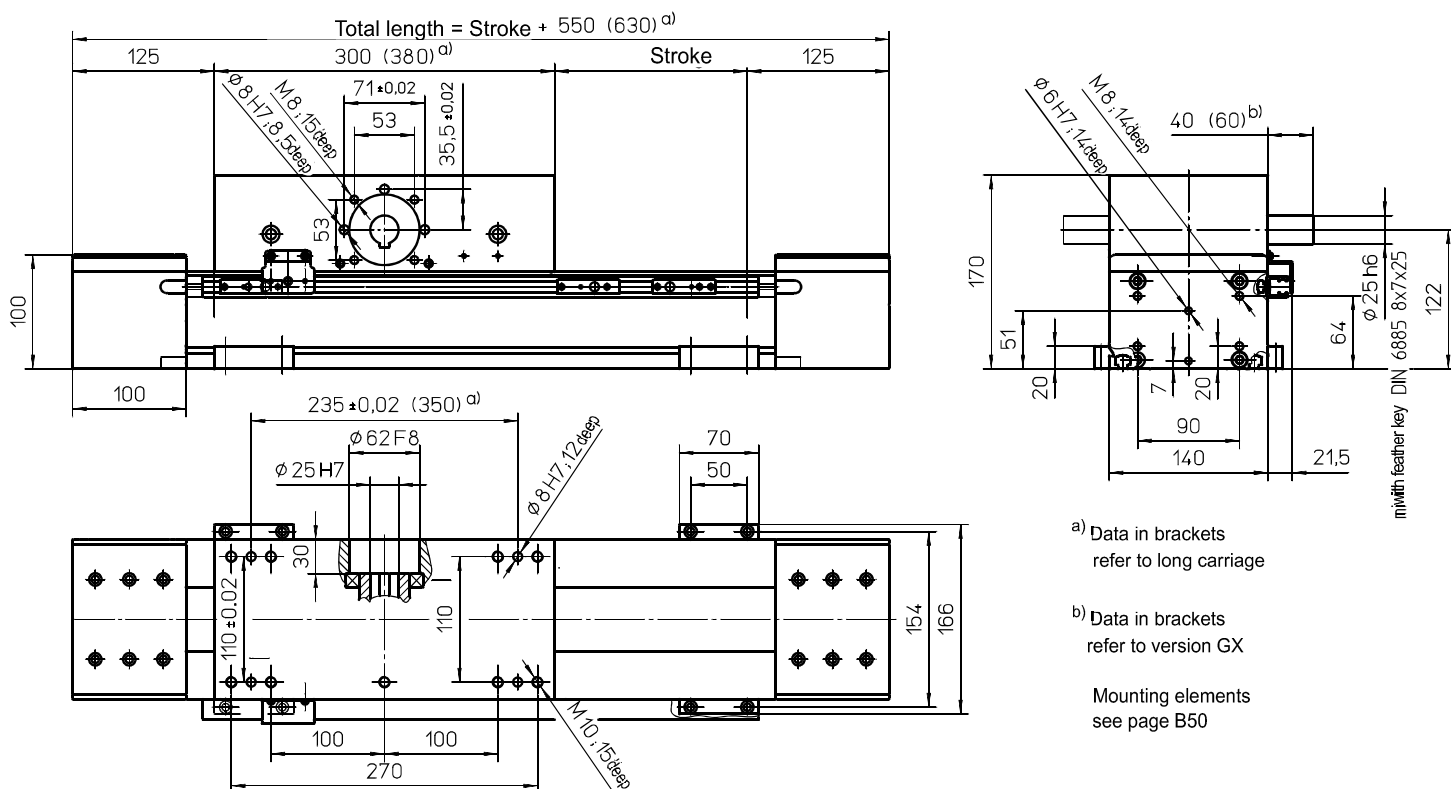

Weights

ASS


Basic length without stroke:	30.00 kg
100 mm stroke:	1.50 kg
Carriage drive 300 mm:	11.70 kg
Carriage drive 380 mm:	14.00 kg
Max. total length: (longer on request)	8100 mm

Technical Data

ASS

Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	3.50 Nm
Moment of inertia:	3.70 •10 ⁻² kgm ²
Drive element:	Toothed belt 50 AT10-E
Stroke per revolution:	240 mm


Forces and moments

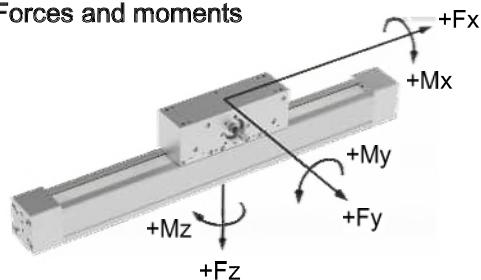

	ASS
Forces	Dynamic [N]
$F_x^{d)}$	2500
F_y	3200
F_z	7500
$-F_z$	5000
Moments	Dynamic [Nm]
M_x	600
M_y	1200 (1600)
M_z	1200 (1600)

d) Maximum value (see diagram "F_x-v-Diagram")
Data in brackets refer to long carriage plate (380)

$F_x - v$ - Diagram

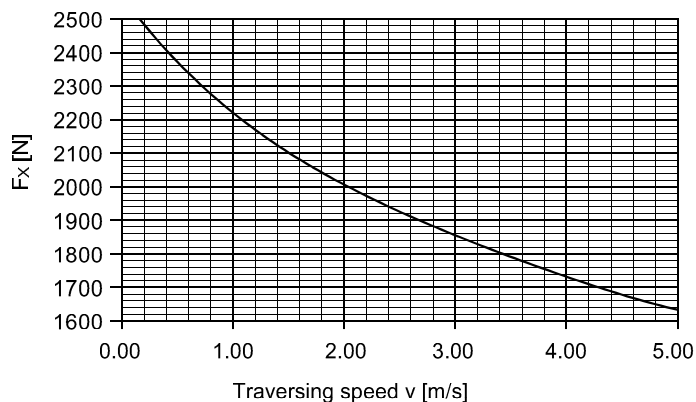

Technical Drawing of the B50 Ball Bearing Unit

Side View Dimensions:

- Total length = Stroke + 480 (660)^{a)}
- Extension by 2SA mm for every 60 mm
- Stroke: 55
- Dimensions: 105, 320 (500)^{a)}, 46, 4, 4, 10
- Mounting elements: 2SA 135, 4SA 165, 6SA 195, 8SA 225
- Mounting elements: 2SA 85, 4SA 115, 6SA 145, 8SA 175
- Dimensions: 45, 66, 70, 10

Front View Dimensions:

- Dimensions: 235 ± 0.02 (415)^{a)}, 110 ± 0.02, 110, 100 (190)^{a)}, 100 (190)^{a)}, 270 (450)^{a)}, 154, 166, 7, 11
- Mounting elements: 2SA 135, 4SA 165, 6SA 195, 8SA 225
- Mounting elements: 2SA 85, 4SA 115, 6SA 145, 8SA 175
- Dimensions: 4, 10, 11

Mounting Elements Table:

Stroke	2SA	4SA	6SA	8SA
55	135	165	195	225
110	195	225	255	285
165	255	285	315	345
220	315	345	375	405
275	375	405	435	465
330	435	465	495	525
385	495	525	555	585
440	555	585	615	645
495	615	645	675	705
550	675	705	735	765
605	735	765	795	825
660	795	825	855	885
715	855	885	915	945
770	915	945	975	1005
825	975	1005	1035	1065
880	1035	1065	1095	1125
935	1095	1125	1155	1185
990	1155	1185	1215	1245
1045	1215	1245	1275	1305
1100	1275	1305	1335	1365
1155	1335	1365	1395	1425
1210	1395	1425	1455	1485
1265	1455	1485	1515	1545
1320	1515	1545	1575	1605
1375	1575	1605	1635	1665
1430	1635	1665	1695	1725
1485	1695	1725	1755	1785
1540	1755	1785	1815	1845
1595	1815	1845	1875	1905
1650	1875	1905	1935	1965
1705	1935	1965	1995	2025
1760	1995	2025	2055	2085
1815	2055	2085	2115	2145
1870	2115	2145	2175	2205
1925	2175	2205	2235	2265
1980	2235	2265	2295	2325
2035	2295	2325	2355	2385
2090	2355	2385	2415	2445
2145	2415	2445	2475	2505
2200	2475	2505	2535	2565
2255	2535	2565	2595	2625
2310	2595	2625	2655	2685
2365	2655	2685	2715	2745
2420	2715	2745	2775	2805
2475	2775	2805	2835	2865
2530	2835	2865	2895	2925
2585	2895	2925	2955	2985
2640	2955	2985	3015	3045
2695	3015	3045	3075	3105
2750	3075	3105	3135	3165
2805	3135	3165	3195	3225
2860	3195	3225	3255	3285
2915	3255	3285	3315	3345
2970	3315	3345	3375	3405
3025	3375	3405	3435	3465
3080	3435	3465	3495	3525
3135	3495	3525	3555	3585
3190	3555	3585	3615	3645
3245	3615	3645	3675	3705
3300	3675	3705	3735	3765
3355	3735	3765	3795	3825
3410	3795	3825	3855	3885
3465	3855	3885	3915	3945
3520	39			

SSS

Basic length without stroke:	15.00 kg
100 mm stroke:	1.90 kg
Entire carriage 320 mm:	7.00 kg
Entire carriage 500 mm:	10.90 kg
(longer on request)	
Max. total length:	5600 mm

SSS

Max. speed:	2.50 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	1.50 Nm

KGT


Max. rotation speed: 3000 min⁻¹
Diameter: 25 mm
Pitch: 5 / 10 / 25 / 50 mm
Moment of inertia: 2.25 • 10⁻⁴ kgm²/m

Forces and moments

A 3D diagram of a beam element of length Δx . The beam is shown in a perspective view, with a blue section highlighted. At the right end of the beam, several forces and moments are applied, indicated by arrows and labels: $+F_x$ (axial force), $+M_x$ (bending moment about the x-axis), $+M_y$ (bending moment about the y-axis), $+F_y$ (shear force), $+M_z$ (bending moment about the z-axis), and $+F_z$ (shear force). The beam is supported by a fixed base at the left end.


	SSS
Forces	Dynamic [N]
F_x	6000
F_y	3200
F_z	7500
-F_z	5000
Moments	Dynamic [Nm]
M_x	600
M_y	1200 (1700)
M_z	1200 (1700)

Spindle support (SA)

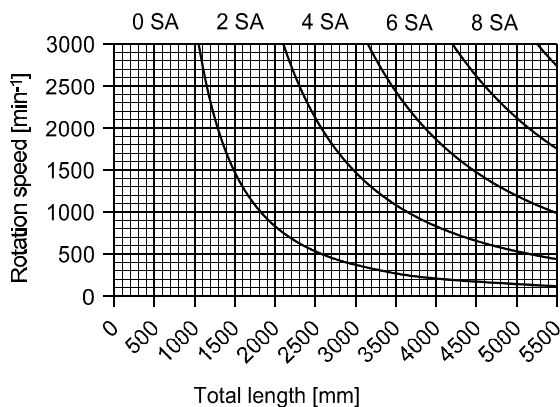

Page B32

with toothed belt drive and rail guide (ZSS)

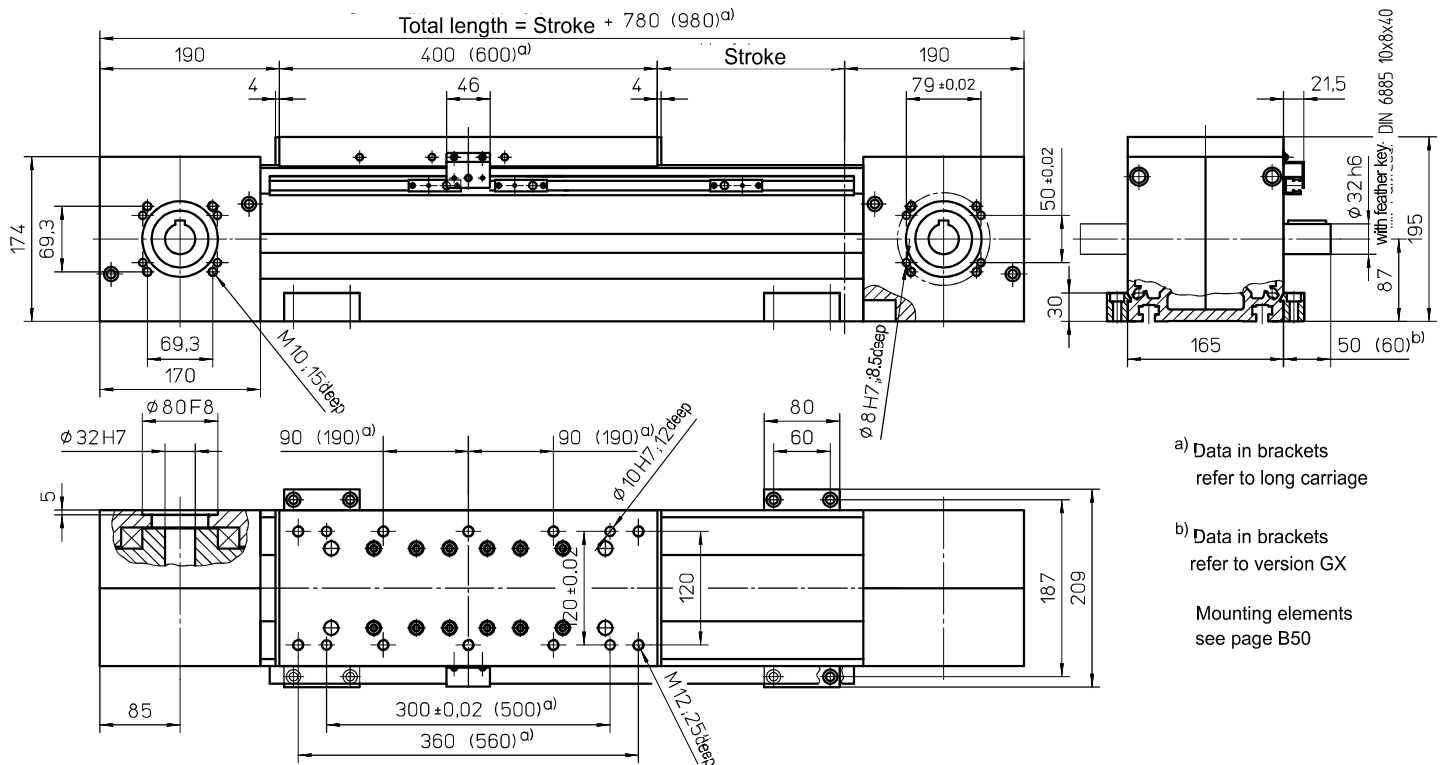

a) Data in brackets refer to long carriage


b) Data in brackets refer to version GX

Mounting elements
see page B50

Weights	ZSS
Basic length without stroke:	38.40 kg
100 mm stroke:	3.00 kg
Entire carriage 400 mm:	11.90 kg
Entire carriage 600 mm:	17.90 kg
Max. total length: (longer on request)	7700 mm

Technical Data	ZSS
Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	12.00 Nm
Moment of inertia:	8.50 •10 ⁻² kgm ²
Drive element:	Toothed belt 75 ATS 15
Stroke per revolution:	450 mm


Forces and moments

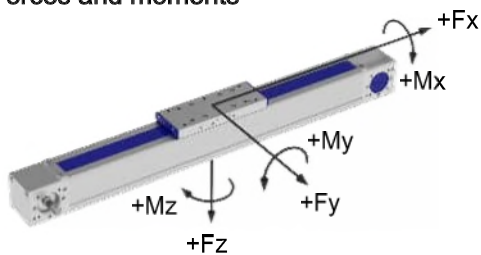

	ZSS
Forces	Dynamic [N]
$F_x^{(d)}$	10000
F_y	5000
F_z	15000
$-F_z$	8000
Moments	Dynamic [Nm]
M_x	700
M_y	1400 (2000)
M_z	1100 (1500)

d) Maximum value (see diagram "F_x-v-Diagram")
Data in brackets refer to long carriage plate (600)

$F_x - v$ - Diagram

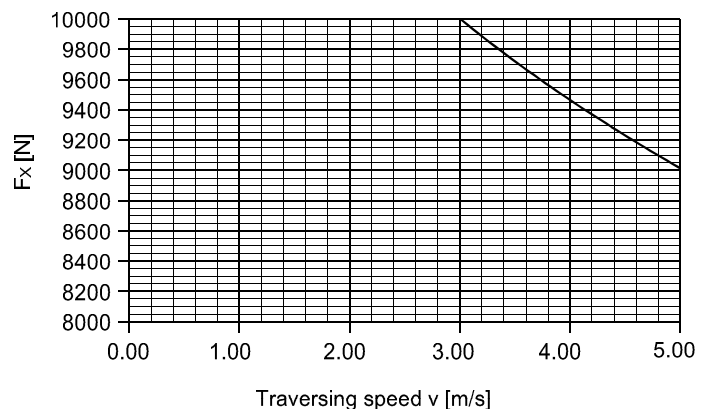

Profile design „S“ at max. total length 5840 mm to 7700 mm (page B49)

Technical drawing of the M12-25 deep groove ball bearing assembly, showing side and front views with dimensions and mounting details.

Side View Dimensions:

- Total length = Stroke + 590 (790)^{a)}
- Extension by 2SA mm for every 80 mm
- Stroke
- Dimensions: 110, 4, 46, 4, 80, 60, 75, 20, 168, $\phi 24$ h7, 6885 8x7x30, with feather key DIN 6885 8x7x30, 90 (190)^{a)}, 90 (190)^{a)}, 80, 60, 120, 187, 209, 5, 17, 300 ± 0.02 (500)^{a)}, 360 (560)^{a)}, $\phi 10$ H7 / k6 deep, M12:25 deep

Front View Dimensions:

- Dimensions: 69.3, 50 ± 0.02 , 79 ± 0.02 , 69.3, 21.5, 195, 120.5, 165, 30
- Thread: $\phi 8$ H7.8.5 / k6 deep, M10:15 deep

Tables:

for 2 SA =	150
for 4 SA =	190
for 6 SA =	230
for 8 SA =	270


for 2 SA =	120
for 4 SA =	160
for 6 SA =	200
for 8 SA =	240

Notes:

- a) Data in brackets refer to long carriage
- Mounting elements see page B50


Mounting elements
see page B50

Forces and moments

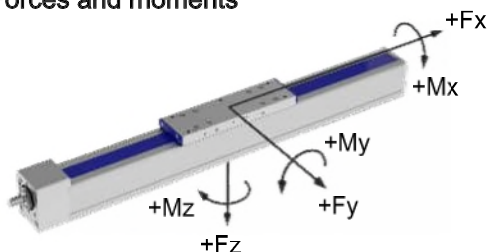


Data in brackets refer to long carriage plate (600)

Spindle support (SA)

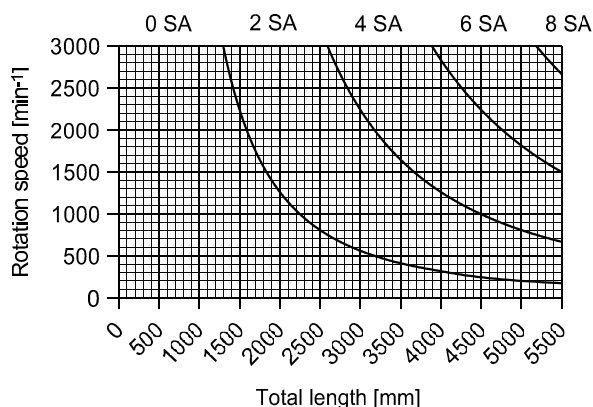

Page B34

with ball screw (KGT) and sliding guide (SGV)

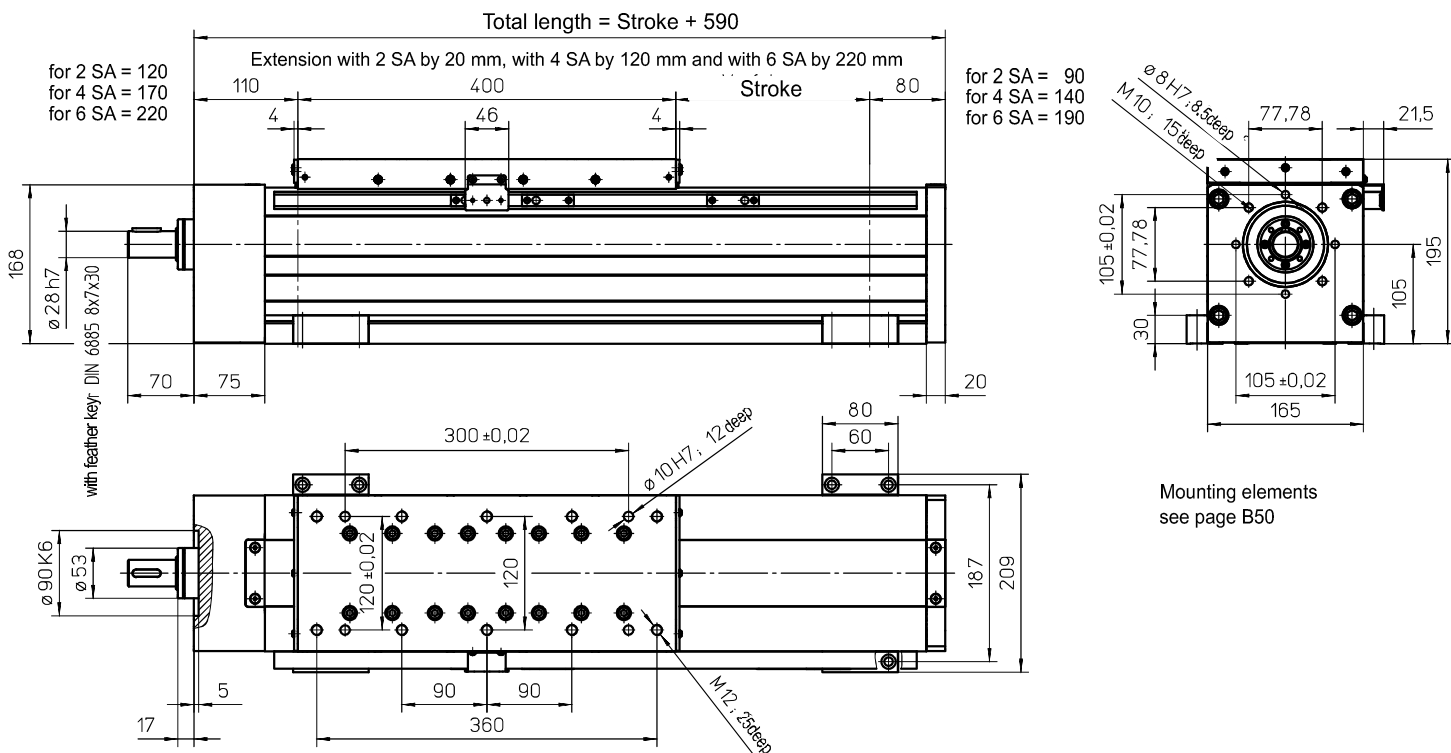

Weights

SGV


Basic length without stroke:	33.00 kg
100 mm stroke:	3.30 kg
Entire carriage 400 mm:	10.50 kg
Max. total length: (longer on request)	5600 mm

Technical Data

SGV

Max. speed:	2.00 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	3.00 Nm

Forces and moments

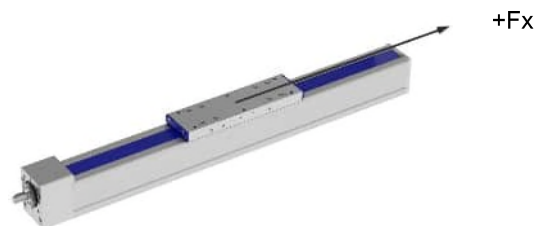

Drive element


KGT

Max. rotation speed:	3000 min ⁻¹
Diameter:	40 mm
Pitch:	5 / 10 / 20 / 40 mm
Moment of inertia:	1.34 · 10 ⁻³ kgm ² /m

Spindle support (SA)

Forces	SGV Dynamic [N]
F _x	18000
F _y	-
F _z	-
-F _z	-
Moments	Dynamic [Nm]
M _x	-
M _y	-
M _z	-

"-" => Must have an external guide.

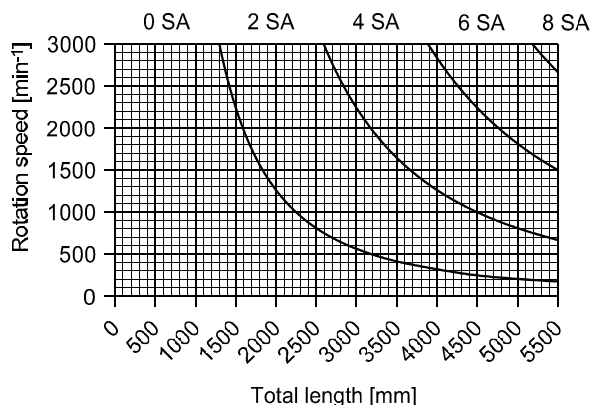

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)
Version with double nut ("MM") not possible.

Technical Drawing of the B50 Linear Actuator

Top View (Side Profile):

- Total length = Stroke + 590**
- Extension by 2SA mm for every 100 mm Stroke**
- Dimensions:** 110, 4, 46, 4, 80, 20, 70, 75, 168, 105 ± 0.02, 77.78, 20.5, 195, 105, 165.
- Specifications:** for 2 SA = 160, for 4 SA = 210, for 6 SA = 260; for 2 SA = 130, for 4 SA = 180, for 6 SA = 230.
- Other labels:** with feather key DIN 6885 8x7x30, Ø 28 H7, Ø 90 K6, Ø 53.

Front View:

- Dimensions:** 300 ± 0.02, 80, 60, 187, 209, 120 ± 0.02, 120, 90, 90, 360, 5, 17.
- Specifications:** Ø 10 H7; 12 deep, M12; 25 deep.


End View:

- Dimensions:** 77.78, 20.5, 195, 105, 165, 105 ± 0.02, 77.78, 30, 105 ± 0.02.
- Specifications:** Ø 8 H7; 8.5 deep, M10; 15 deep.


Mounting elements see page B50

Mounting elements
see page B50

Forces and moments

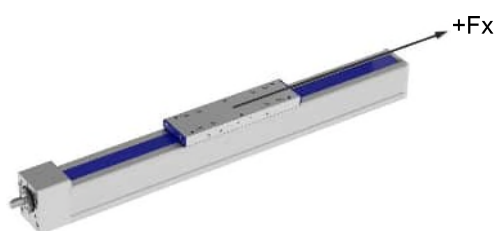


Spindle support (SA)

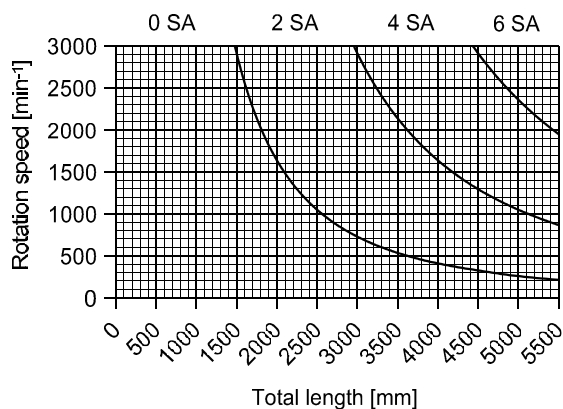

	SGV
Forces	Dynamic [N]
F_x	25000
F_y	-
F_z	-
$-F_z$	-
Moments	Dynamic [Nm]
M_x	-
M_y	-
M_z	-

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

with ball screw (KGT) and rail guide (SSF)

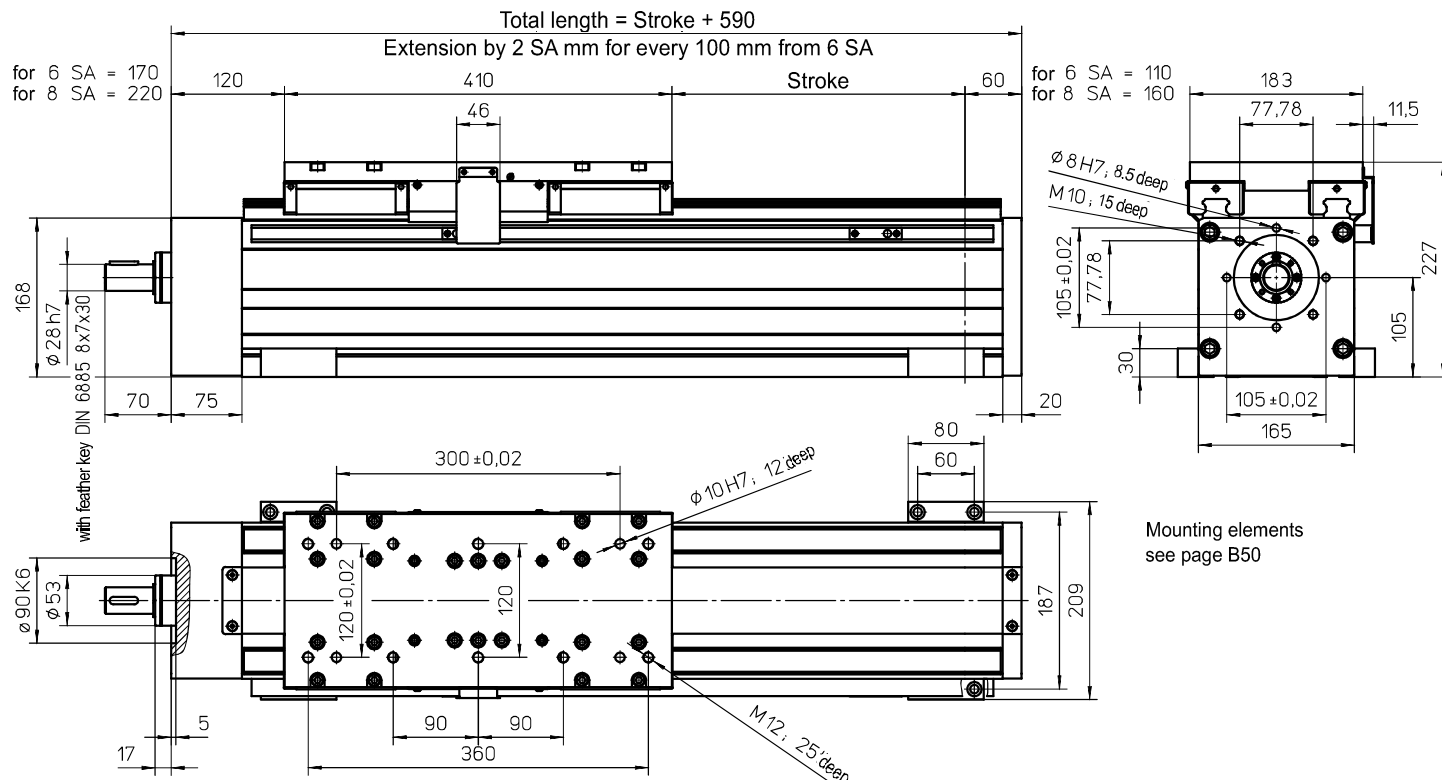

Mounting elements
see page B50

Weights

SSF


Basic length without stroke:	38.90 kg
100 mm stroke:	4.40 kg
Entire carriage 410 mm:	25.20 kg
Max. total length: (longer on request)	5600 mm

Technical Data

SSF

Max. total speed:	1.00 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	3.20 Nm

Forces and Moments

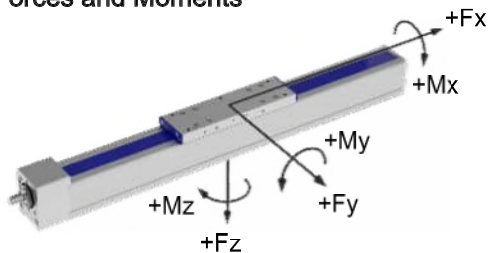


	SSF
Forces	Dynamic [N]
F _x	25000
F _y	5000
F _z	15000
-F _z	8000
Moments	Dynamic [Nm]
M _x	800
M _y	1800
M _z	1400

Drive element

KGT

Max. rotation speed:	3000 min ⁻¹
Diameter:	50 mm
Pitch:	10 / 20 mm
Moment of inertia:	3.45 • 10 ⁻³ kgm ² /m

Spindle support (SA)

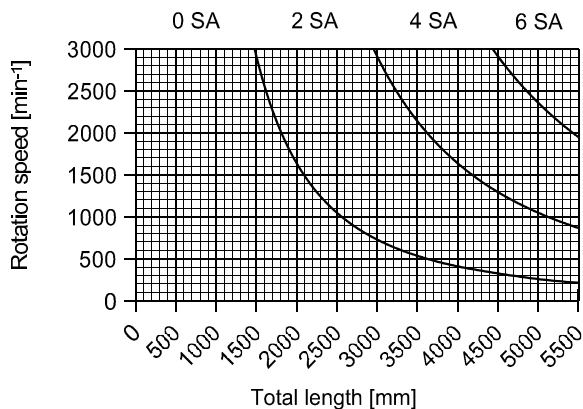


Special design: Spindle support with damping ring (from 4SA: extension of total length: 10 mm for every 2 SA)

[illegible]

Technical Data	ZSS
Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	8.00 Nm
Moment of inertia:	5.60 • 10 ⁻² kgm ²
Drive element:	Toothed belt 75 AT10
Stroke per revolution:	320 mm


A 3D perspective diagram of a beam element. The beam is a long, thin rectangular prism with a blue longitudinal slot. At the right end, a coordinate system is defined with three axes: a vertical axis pointing upwards labeled $+F_z$, a horizontal axis pointing to the right labeled $+F_x$, and a diagonal axis pointing downwards and to the right labeled $+F_y$. Corresponding moment arrows are shown: a curved arrow around the $+F_x$ axis labeled $+M_x$, a curved arrow around the $+F_y$ axis labeled $+M_y$, and a curved arrow around the $+F_z$ axis labeled $+M_z$.

$F_x - v$ - Diagram

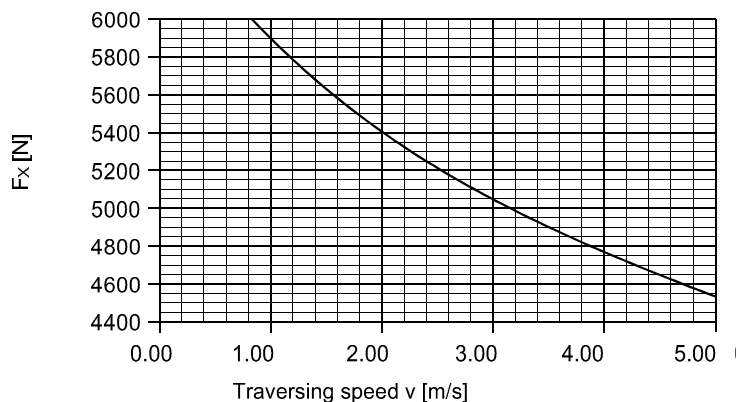

Release: 28.08.2024

with toothed belt drive and double linear guide (ASS)

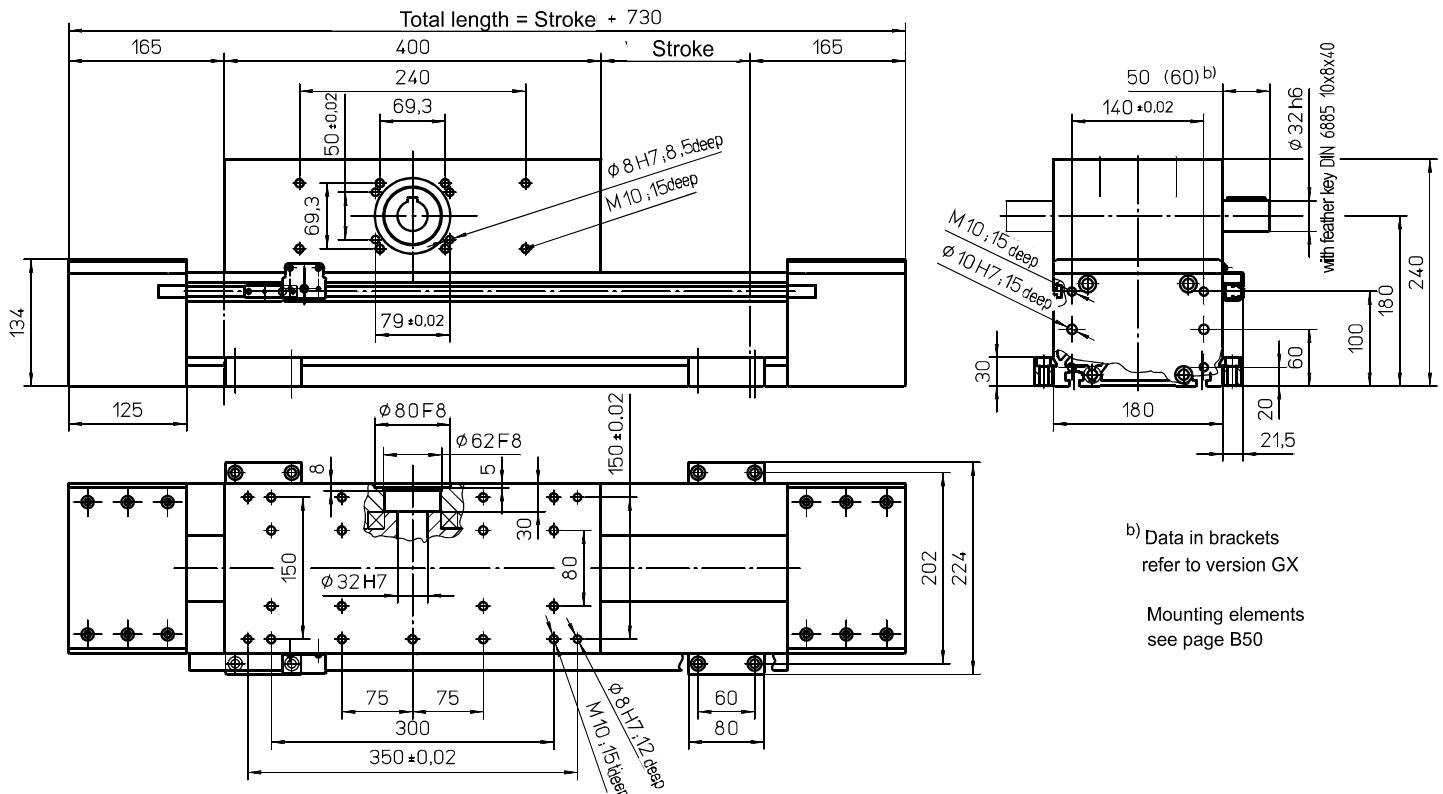

Weights

ASS


Basic length without stroke:	48.90 kg
100 mm stroke:	2.80 kg
Carriage drive 400 mm:	25.60 kg
Max. total length: (longer on request)	6200 mm

Technical Data

ASS

Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	8.00 Nm
Moment of inertia:	6.20 •10 ⁻² kgm ²
Drive element:	Toothed belt 75 AT10
Stroke per revolution:	320 mm


Forces and moments

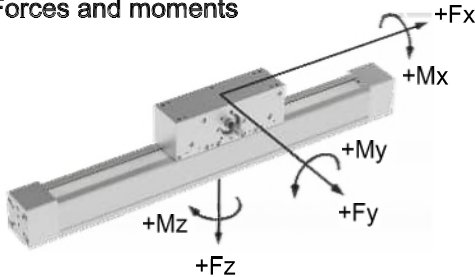


	ASS
Forces	Dynamic [N]
$F_x^{(d)}$	3500
F_y	6000
F_z	12000
$-F_z$	6000
Moments	Dynamic [Nm]
M_x	1500
M_y	3000
M_z	1500

d) Maximum value (see diagram "F_x-v-Diagram")

$F_x - v$ - Diagram

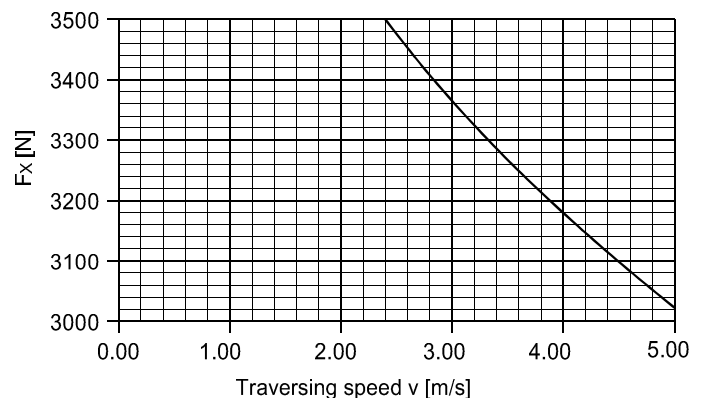

with ball screw (KGT) and double linear guide (SSS)

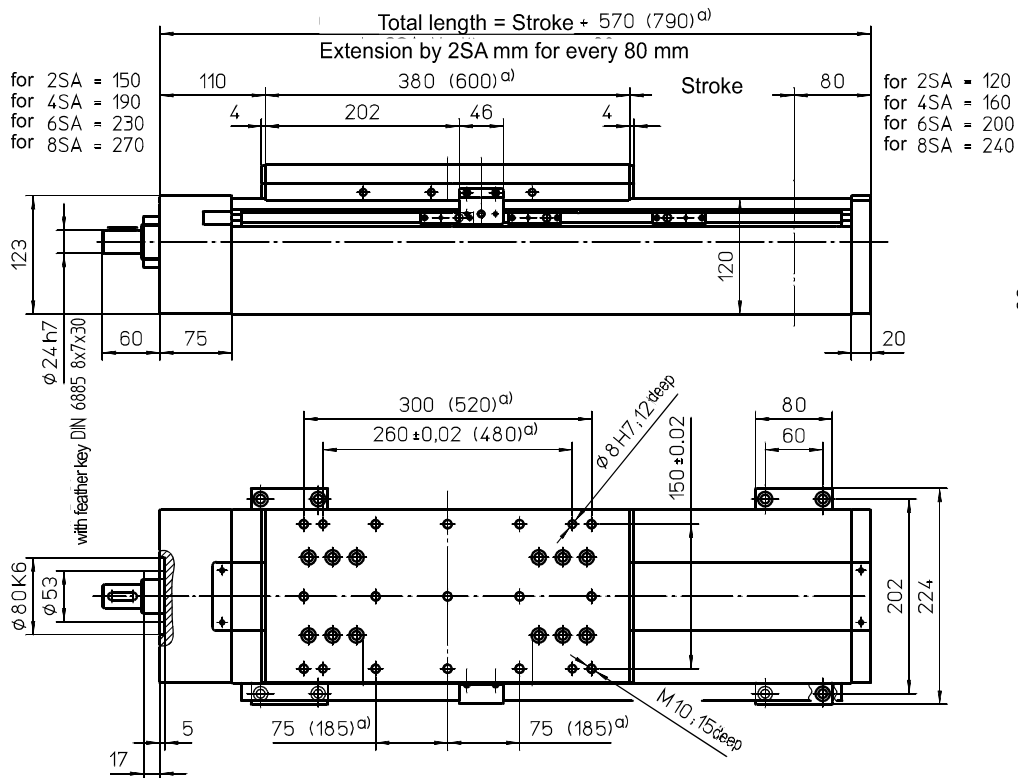

a) Data in brackets refer to long carriage

Mounting elements see page B50

Weights

SSS

Basic length without stroke:	33.50 kg
100 mm stroke:	2.80 kg
Entire carriage 380 mm:	10.80 kg
Entire carriage 600 mm:	15.50 kg


Max. total length: 5600 mm
(longer on request)

Technical Data

SSS

Max. speed:	3.00 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	2.50 Nm

Forces and moments

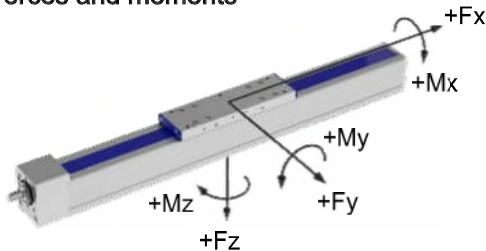

Drive element

KGT

Max. rotation speed:	3000 min ⁻¹
Diameter:	32 mm
Pitch:	5 / 10 / 20 / 40 / 60 mm
Moment of inertia:	$6.39 \cdot 10^{-4}$ kgm ² /m


Spindle support (SA)

	SSS
Forces	Dynamic [N]
F_x	12000 *
F_y	6000
F_z	12000
$-F_z$	6000
Moments	Dynamic [Nm]
M_x	1500
M_y	3000 (4000)
M_z	1500 (2000)


Data in brackets refer to long carriage plate (600)

* for KGT 3240 and 3260: 8000 N

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

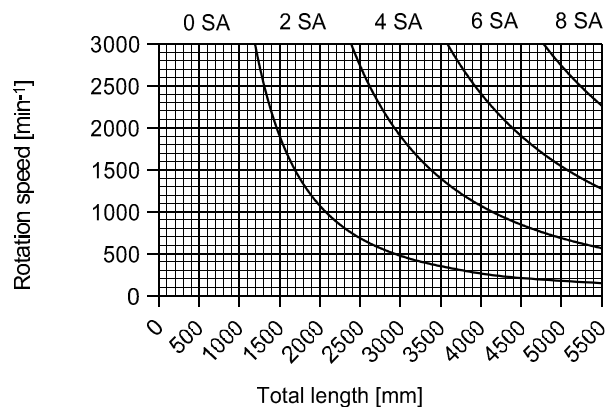

with toothed belt drive and double linear guide (ZSS)

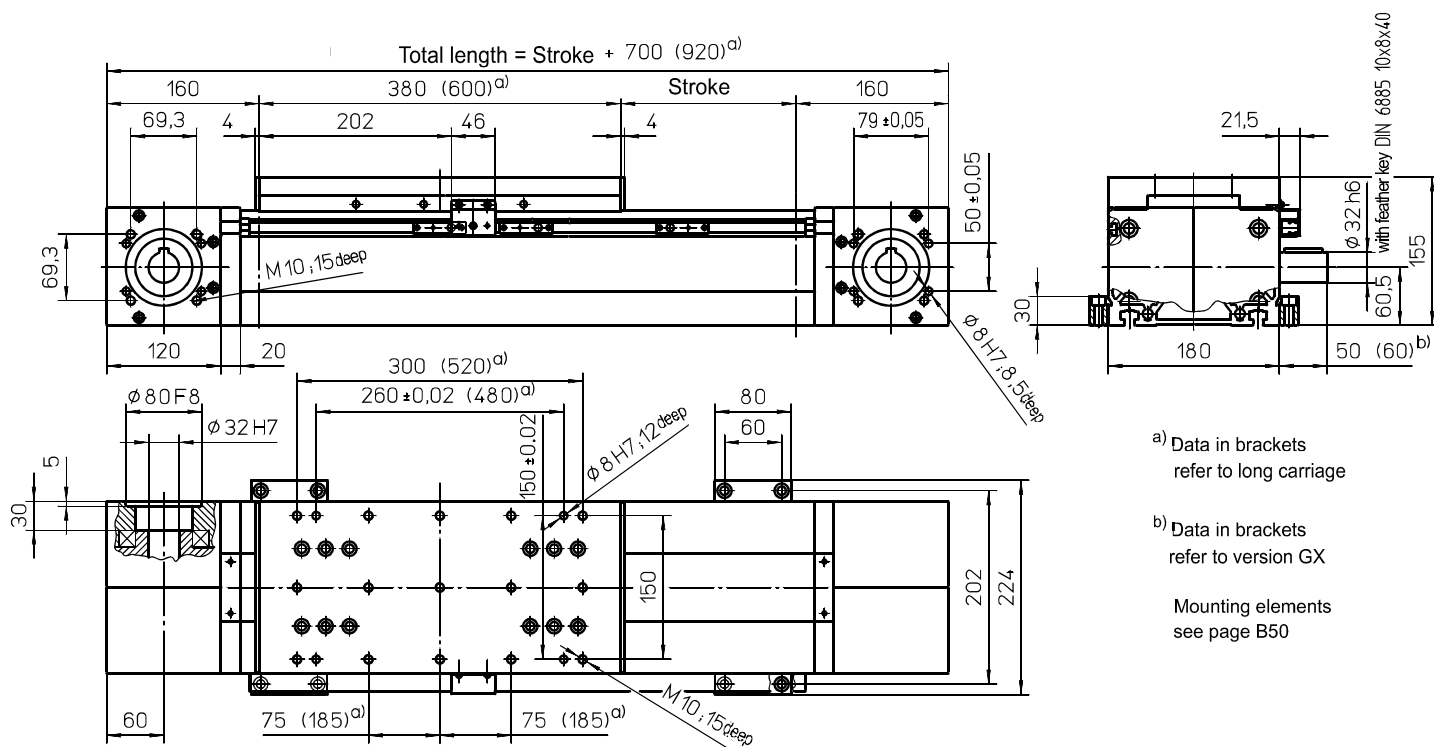

a) Data in brackets refer to long carriage

b) Data in brackets refer to version GX

Mounting elements see page B50

Weights

ZSS

Basic length without stroke:	39.70 kg
100 mm stroke:	2.60 kg
Entire carriage 380 mm:	14.65 kg
Entire carriage 600 mm:	15.75 kg


Max. total length: 6200 mm
(longer on request)

Technical Data

ZSS

Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	8.00 Nm
Moment of inertia:	4.65 • 10 ⁻² kgm ²
Drive element:	Toothed belt 75 AT10
Stroke per revolution:	320 mm

Forces and moments

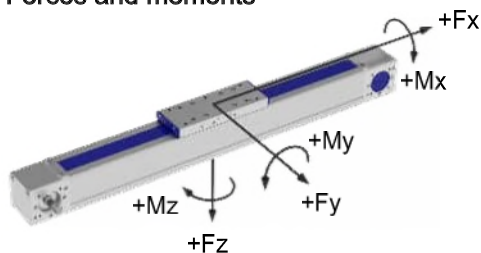


Forces	ZSS Dynamic [N]
F _x ^{d)}	6000
F _y	8000
F _z	15000
-F _z	8000
Moments	ZSS Dynamic [Nm]
M _x	1800
M _y	3600 (4800)
M _z	1800 (2400)


^{d)} Maximum value (see diagram "F_x-v-Diagram")

Data in brackets refer to long carriage plate (600)

F_x - v - Diagram

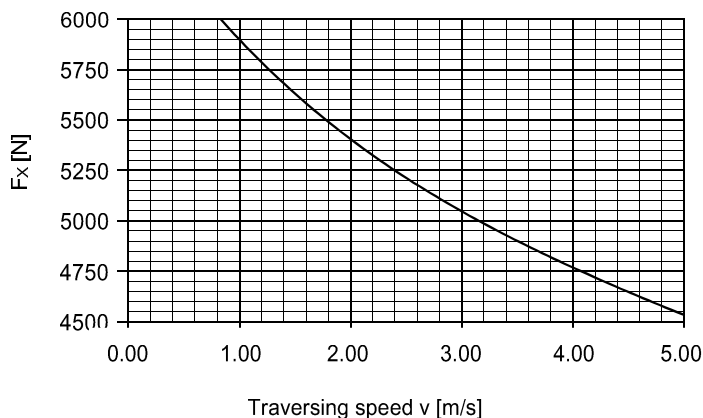

with toothed belt drive and double linear guide (ASS)

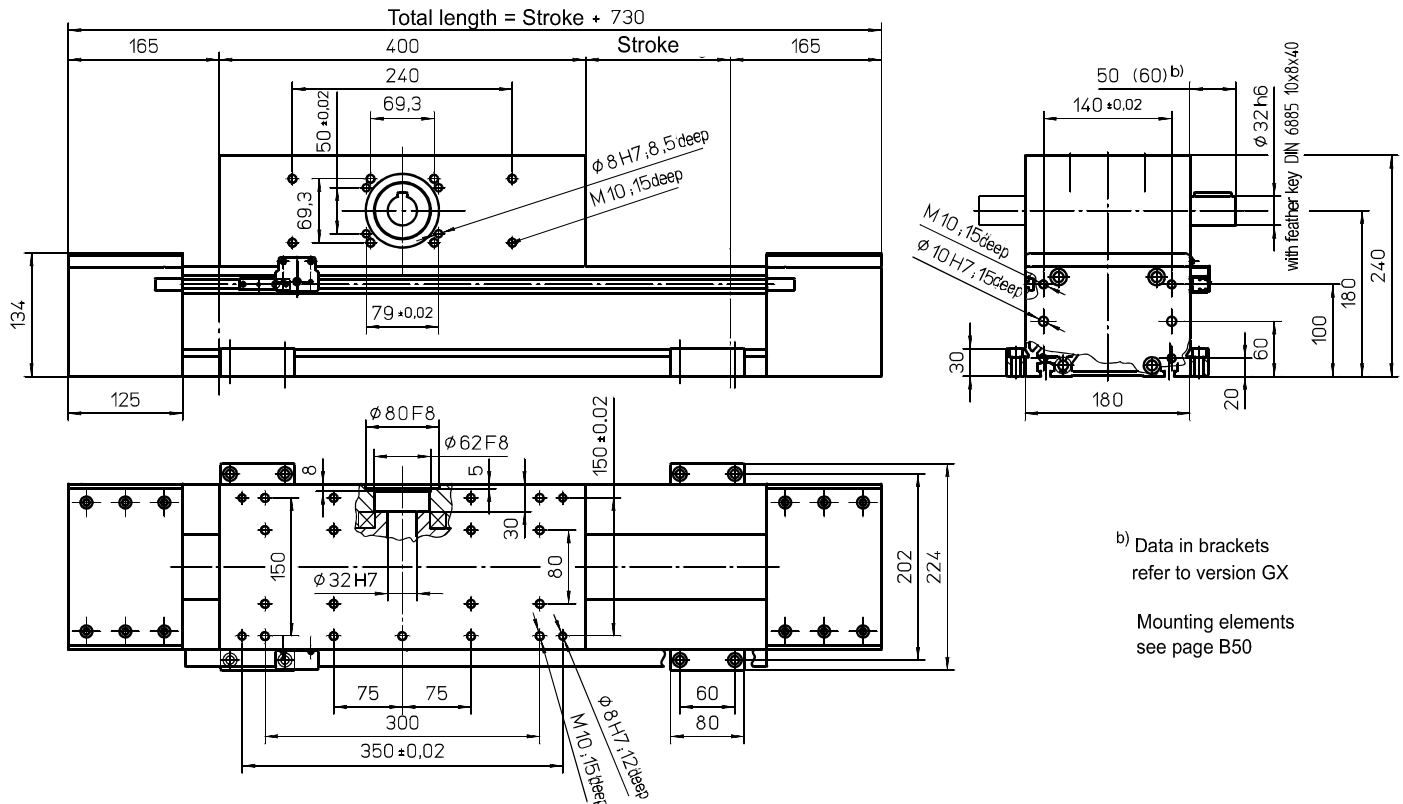


b) Data in brackets refer to version GX

Mounting elements see page B50

Weights	ASS
Basic length without stroke:	51.50 kg
100 mm stroke:	3.60 kg
Carriage drive 400 mm:	27.35 kg
Max. total length: (longer on request)	6200 mm

Technical Data	ASS
Max. speed:	5.00 m/s
Max. acceleration:	60 m/s ²
Repeat accuracy:	± 0.08 mm
Idle torque:	8.00 Nm
Moment of inertia:	7.75 • 10 ⁻² kgm ²
Drive element:	Toothed belt 75 AT10
Stroke per revolution:	320 mm


Forces and moments

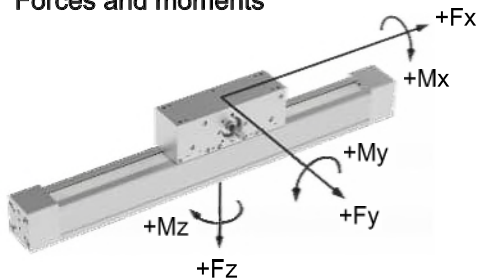

Forces	ASS Dynamic [N]
F _x ^{d)}	3500
F _y	8000
F _z	15000
-F _z	8000
Moments	Dynamic [Nm]
M _x	1800
M _y	3600 (4800)
M _z	1800 (2400)


^{d)} Maximum value (see diagram "F_x-v-Diagram")

F_x - v - Diagram

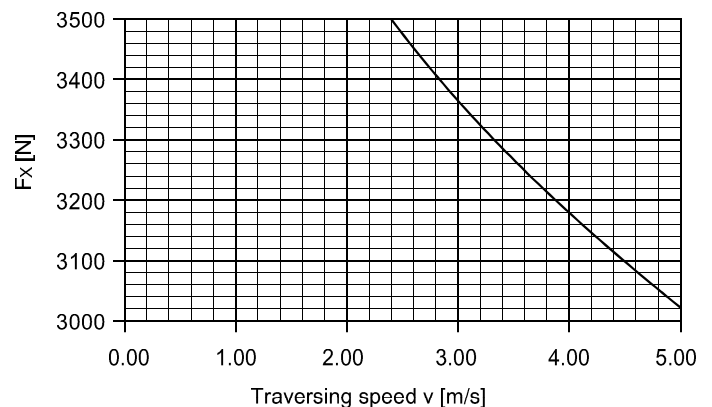

For mechanical linear drives with roller guide, the static load rating "C_{stat}" (page TL 11) applies for static loads.

with ball screw (KGT) and double linear guide (SSS)

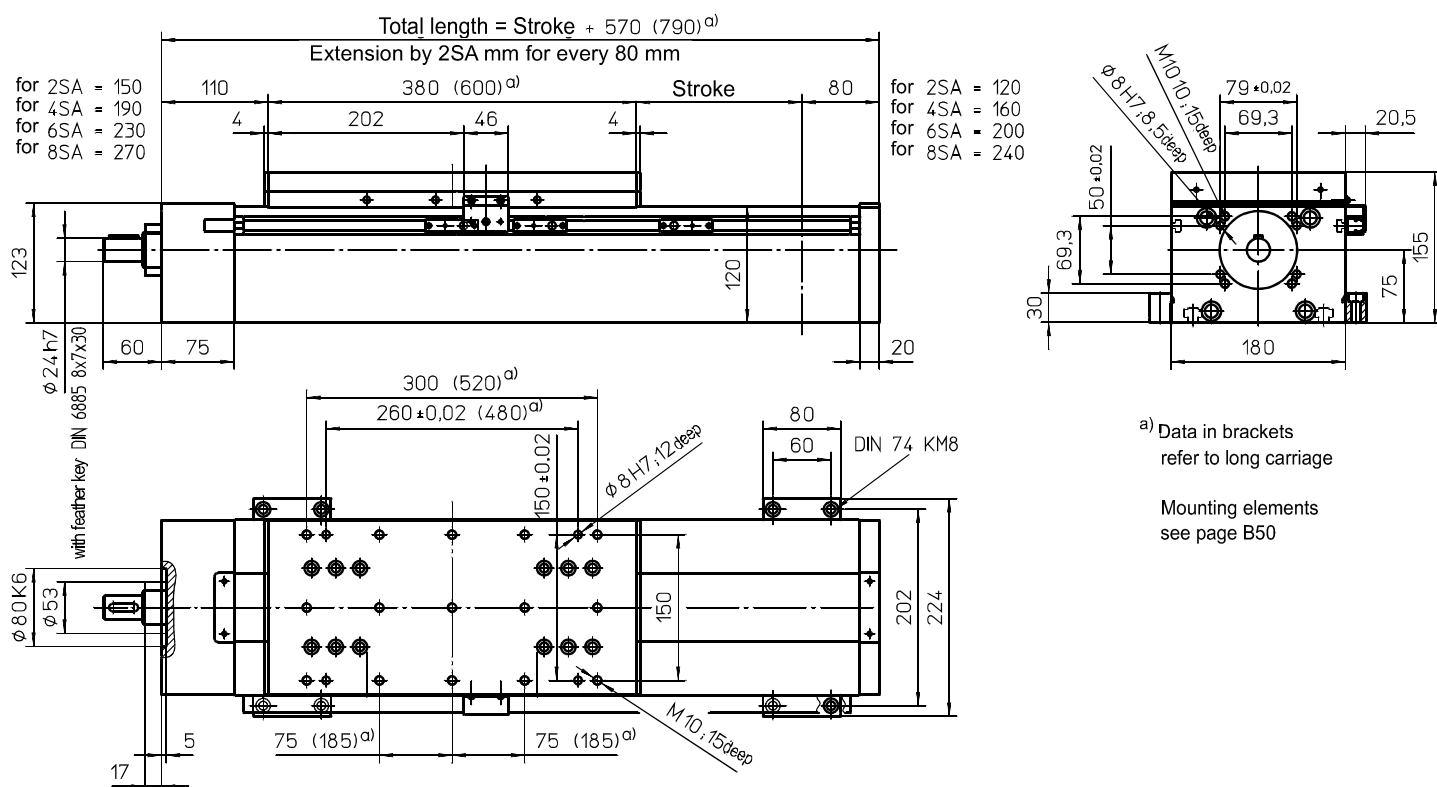


Weights

Basic length without stroke:	37.00 kg
100 mm stroke:	3.00 kg
Entire carriage drive 380 mm:	14.30 kg
Entire carriage drive 600 mm:	15.40 kg

Max. total length: 5600 mm
(longer on request)

Forces and moments

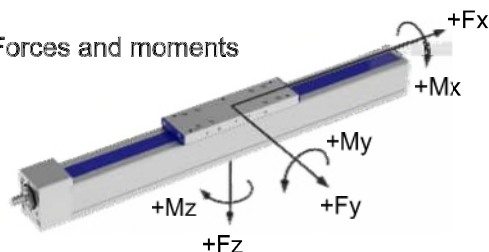

	SSS
Forces	Dynamic [N]
$F_x^{(d)}$	12000 *
F_y	8000
F_z	15000
$-F_z$	8000
Moments	Dynamic [Nm]
M_x	1800
M_y	3600 (4800)
M_z	1800 (2400)

Data in brackets refer to long carriage plate (600)

* at KGT 3240 and 3260: 8000 N


Technical Data

Max. total speed:	3.00 m/s
Max. acceleration:	20 m/s ²
Repeat accuracy:	± 0.03 mm (KGT)
Idle torque:	2.50 Nm


Drive element

Max. rotation speed:	3000 min ⁻¹
Diameter:	32 mm
Pitch:	5 / 10 / 20 / 40 / 60 mm
Moment of inertia:	6.39 · 10 ⁻⁴ kam ² /m

Spindle support (SA)

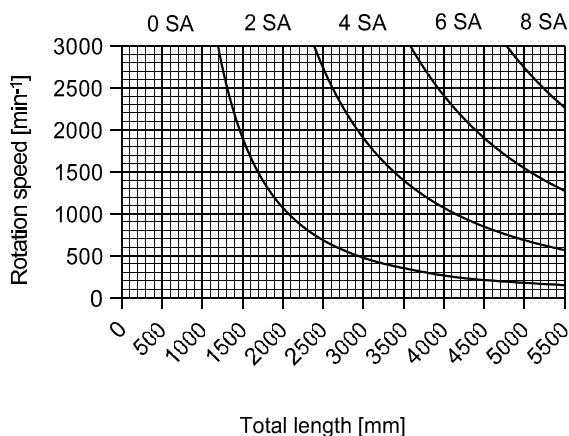

Special design: Spindle support with damping ring (extension of total length: 10 mm for every 2 SA)

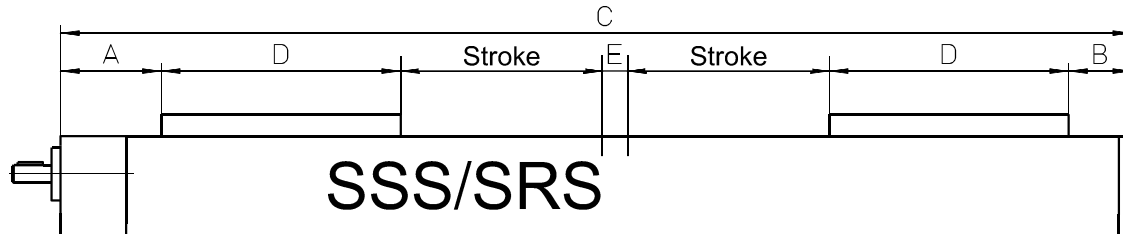

Unit size	A [mm]	B [mm]	Total length C [mm]	D [mm]	E [mm]	Screw drive ^{c)}
Beta 50-C-SRS	60	20	2 x stroke + 3800 (480) ^{a)} + E	150 (200) ^{a)}	min. 50	KGT 1205 or Tr 12x3
Beta 60-SGV Beta 60-SSS	65	35	2 x stroke + 460 (560) ^{a)} + E 120 mm extension for every 4 SA	180 (230) ^{a)}	min. 40 without SA	KGT 2005 or Tr 20x4
Beta 70-C-SRS Beta 70-C-SSS	80	50	2 x stroke + 510 (610) ^{a)} + E 80 mm extension for every 4 SA	190 (240) ^{a)}	min. 30 without SA min. 30 ^{b)} without SA	KGT 1605 or Tr 16x4
Beta 80-SRS Beta 80-SSS	105	65	2 x stroke + 590 (710) ^{a)} + E 100 mm extension for every 4 SA	210 (270) ^{a)}	min. 30 without SA min. 30 ^{b)} without SA	KGT 20025 or Tr 20x4
Beta 110-SRS Beta 110-SSS	105	55	2 x stroke+ 800 (1160) ^{a)} + E 120 mm extension for every 4 SA	320 (500) ^{a)}	min. 30 without SA min. 30 without SA	KGT 2505 or Tr 24x5
Beta 120-C-SSS	105	55	2 x stroke+ 800 (1160) ^{a)} + E 120 mm extension for every 4 SA	320 (500) ^{a)}	min. 40 without SA	KGT 3205 or Tr 32x6
Beta 140-C-SSS	105	55	2 x stroke+ 800 (1160) ^{a)} + E 120 mm extension for every 4 SA	320 (500) ^{a)}	min. 30 without SA	KGT 2505 or Tr 24x5
Beta 165-SSS	110	55	2 x stroke+ 990 (1390) ^{a)} + E 160 mm extension for every 4 SA	320 (500) ^{a)}	min. 30 without SA	KGT 405/4010 or Tr 32x6
Beta 180-C-SSS	110	55	2 x stroke+ 950 (1390) ^{a)} + E 160 mm extension for every 4 SA	320 (500) ^{a)}	min. 30 without SA	KGT 3205 or Tr 32x6

For detailed measurements, see main data sheet for respective size (version).


a) Data in brackets apply to long carriage plate.

b) Value applies to guide Bosch-Rexroth. For guide THK applies value 40.


c) Load ratings for KGT see table on page TL 13

Please note that the technical data of the axes may change for right/left versions.


Individual technical advice from our sales department is therefore required depending on the application.


Profile Beta 40


Specific mass [kg/m]	1.72
Surface measure [mm ²]	636
Geometrical moment of inertia I _y [mm ⁴]	88914
Geometrical moment of inertia I _z [mm ⁴]	133632
Section modulus W _y [mm ³]	3762
Section modulus W _z [mm ³]	6678


Profile Beta 50-C


Specific mass [kg/m]	2.45
Surface measure [mm ²]	907
Geometrical moment of inertia I _y [mm ⁴]	235424
Geometrical moment of inertia I _z [mm ⁴]	294804
Section modulus W _y [mm ³]	8586
Section modulus W _z [mm ³]	11792

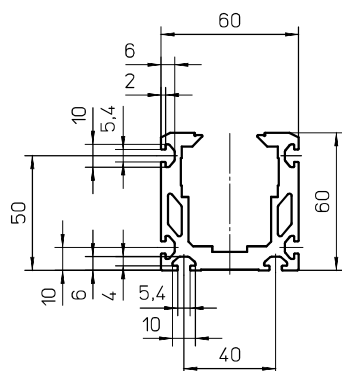
Profile Beta 60-SGV-SSS







Specific mass [kg/m]	3.35
Surface measure [mm ²]	1240
Geometrical moment of inertia I _y [mm ⁴]	474324
Geometrical moment of inertia I _z [mm ⁴]	577693
Section modulus W _y [mm ³]	13698
Section modulus W _z [mm ³]	19256

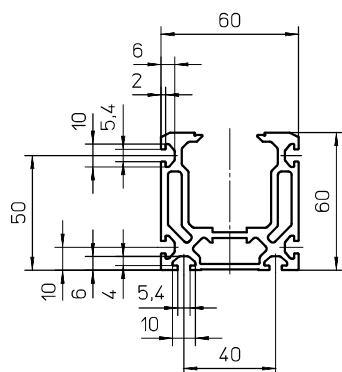
Profile Beta 60-ZSS

Specific mass [kg/m]	3.01
Surface measure [mm ²]	1114
Geometrical moment of inertia I _y [mm ⁴]	400064
Geometrical moment of inertia I _z [mm ⁴]	522090
Section modulus W _y [mm ³]	11943
Section modulus W _z [mm ³]	17403

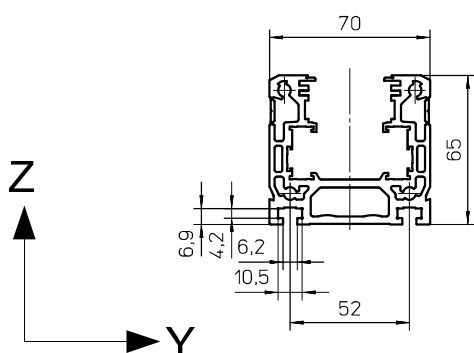
Profile Beta 70-C-ZRS-SRS

Specific mass [kg/m]	3.70
Surface measure [mm ²]	1370
Geometrical moment of inertia I _y [mm ⁴]	583502
Geometrical moment of inertia I _z [mm ⁴]	852344
Section modulus W _y [mm ³]	15714
Section modulus W _z [mm ³]	24348

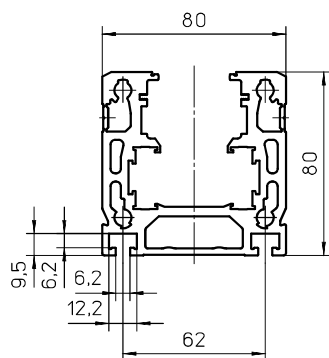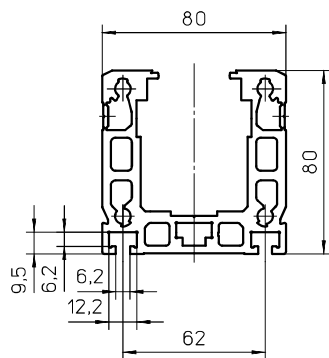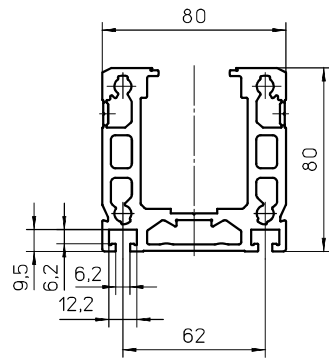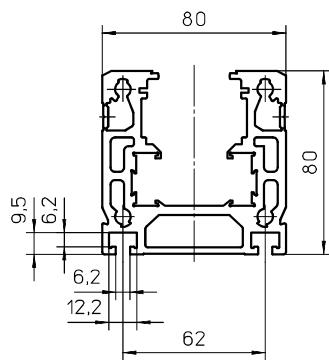

Profile Beta 70-C-ZSS-SSS

Specific mass [kg/m]	3.70
Surface measure [mm ²]	1370
Geometrical moment of inertia I _y [mm ⁴]	563227
Geometrical moment of inertia I _z [mm ⁴]	852687
Section modulus W _y [mm ³]	14783
Section modulus W _z [mm ³]	24360

Profile Beta 80-ZRS-SRS

Specific mass [kg/m]	5.58
Surface measure [mm ²]	2066
Geometrical moment of inertia I _y [mm ⁴]	1274608
Geometrical moment of inertia I _z [mm ⁴]	1706029
Section modulus W _y [mm ³]	29631
Section modulus W _z [mm ³]	42615

Profile Beta 80-ZSS


Specific mass [kg/m]	5.52
Surface measure [mm ²]	2044
Geometrical moment of inertia I _y [mm ⁴]	1330612
Geometrical moment of inertia I _z [mm ⁴]	1694165
Section modulus W _y [mm ³]	30499
Section modulus W _z [mm ³]	42354

Profile Beta 80-SGV-SSS

Specific mass [kg/m]	5.55
Surface measure [mm ²]	2056
Geometrical moment of inertia I _y [mm ⁴]	1371407
Geometrical moment of inertia I _z [mm ⁴]	1677472
Section modulus W _y [mm ³]	30626
Section modulus W _z [mm ³]	41937


Profile Beta 80-C-ZRS

Specific mass [kg/m]	5.69
Surface measure [mm ²]	2109
Geometrical moment of inertia I _y [mm ⁴]	1304382
Geometrical moment of inertia I _z [mm ⁴]	1760119
Section modulus W _y [mm ³]	31042
Section modulus W _z [mm ³]	44002

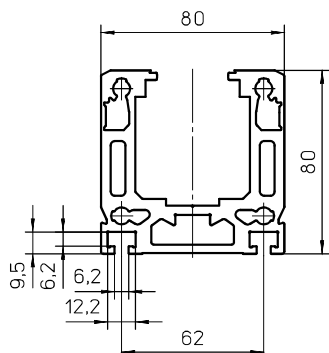


Profile Beta 80-C-ZSS

Specific mass [kg/m]	5.91
Surface measure [mm ²]	2190
Geometrical moment of inertia I _y [mm ⁴]	1374486
Geometrical moment of inertia I _z [mm ⁴]	1772461
Section modulus W _y [mm ³]	30321
Section modulus W _z [mm ³]	44309

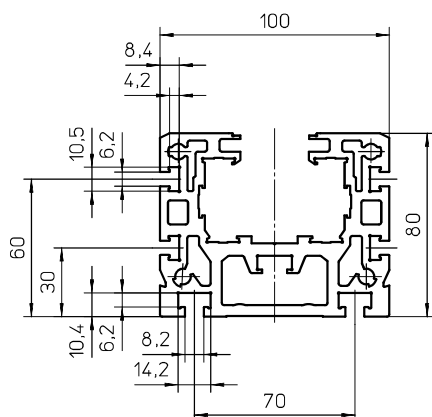


Profile Beta 100

Specific mass [kg/m]	8.03
Surface measure [mm ²]	2976
Geometrical moment of inertia I _y [mm ⁴]	1784876
Geometrical moment of inertia I _z [mm ⁴]	3588262
Section modulus W _y [mm ³]	41011
Section modulus W _z [mm ³]	71764

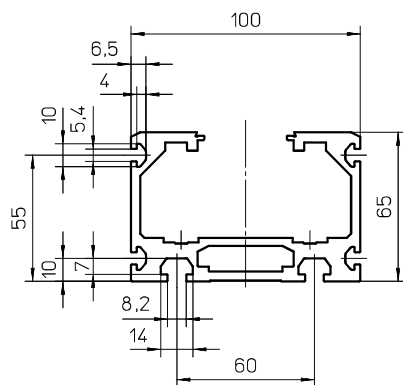


Profile Beta 100-D

Specific mass [kg/m]	4.87
Surface measure [mm ²]	1804
Geometrical moment of inertia I _y [mm ⁴]	917778
Geometrical moment of inertia I _z [mm ⁴]	2328902
Section modulus W _y [mm ³]	23868
Section modulus W _z [mm ³]	46578

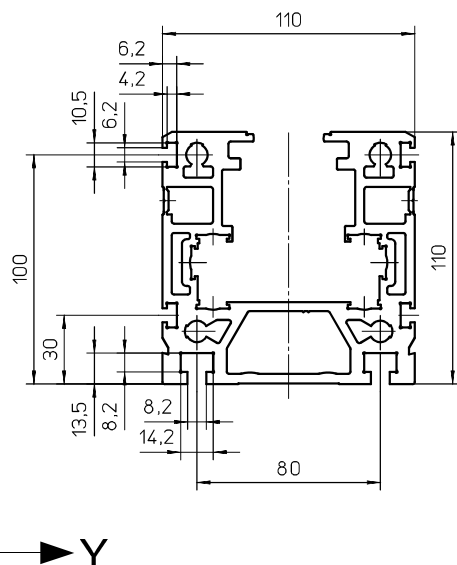

Profile Beta 110-ZRS-SRS

Specific mass [kg/m]	10.5
Surface measure [mm ²]	3890
Geometrical moment of inertia I _y [mm ⁴]	4999522
Geometrical moment of inertia I _z [mm ⁴]	6042239
Section modulus W _y [mm ³]	85583
Section modulus W _z [mm ³]	109849

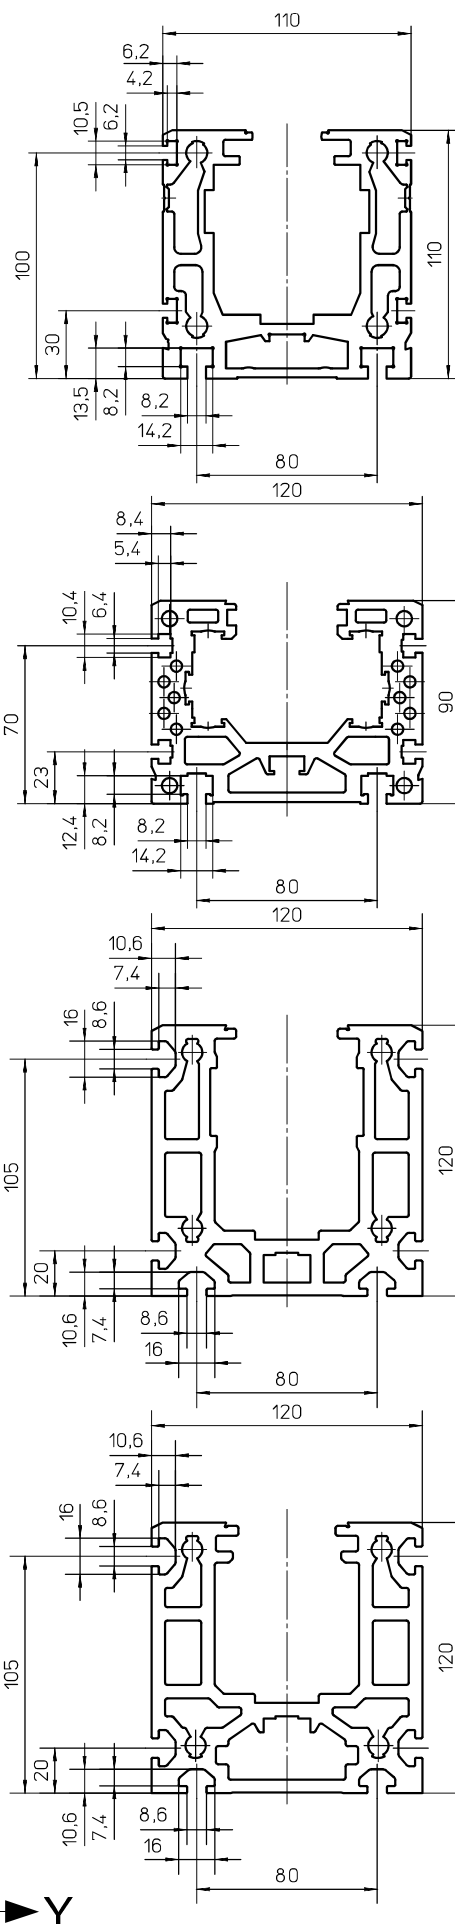

Profile Beta 110-ZSS-SSS / 110-C-SGV

Specific mass [kg/m]	10.65
Surface measure [mm ²]	3945
Geometrical moment of inertia I _y [mm ⁴]	4940967
Geometrical moment of inertia I _z [mm ⁴]	5979329
Section modulus W _y [mm ³]	79570
Section modulus W _z [mm ³]	108620

Profile Beta 120


Specific mass [kg/m]	10.44
Surface measure [mm ²]	3867
Geometrical moment of inertia I _y [mm ⁴]	3093457
Geometrical moment of inertia I _z [mm ⁴]	7081517
Section modulus W _y [mm ³]	62660
Section modulus W _z [mm ³]	118024

Profile Beta 120-C-SSS

Specific mass [kg/m]	13.24
Surface measure [mm ²]	4902
Geometrical moment of inertia I _y [mm ⁴]	7217779
Geometrical moment of inertia I _z [mm ⁴]	8754150
Section modulus W _y [mm ³]	104573
Section modulus W _z [mm ³]	145902


Profile Beta 120-C-ZSS

Specific mass [kg/m]	13.75
Surface measure [mm ²]	5092
Geometrical moment of inertia I _y [mm ⁴]	7115871
Geometrical moment of inertia I _z [mm ⁴]	8943087
Section modulus W _y [mm ³]	108651
Section modulus W _z [mm ³]	149051

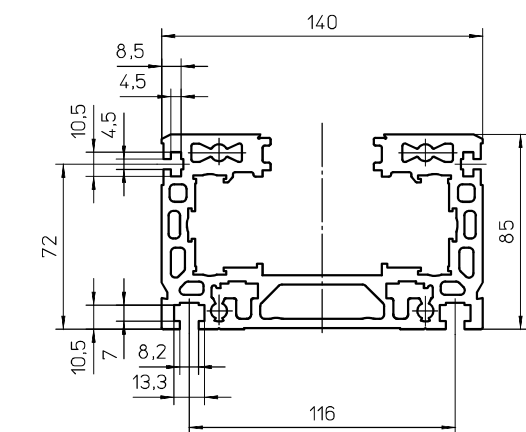


Profile Beta 140

Specific mass [kg/m]	10.14
Surface measure [mm ²]	3757
Geometrical moment of inertia I _y [mm ⁴]	3160259
Geometrical moment of inertia I _z [mm ⁴]	9121665
Section modulus W _y [mm ³]	69973
Section modulus W _z [mm ³]	130309

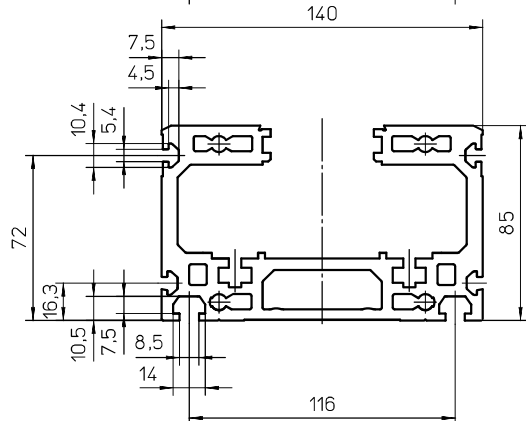


Profile Beta 140-C

Specific mass [kg/m]	10.08
Surface measure [mm ²]	3733
Geometrical moment of inertia I _y [mm ⁴]	3117373
Geometrical moment of inertia I _z [mm ⁴]	9047121
Section modulus W _y [mm ³]	66782
Section modulus W _z [mm ³]	129244

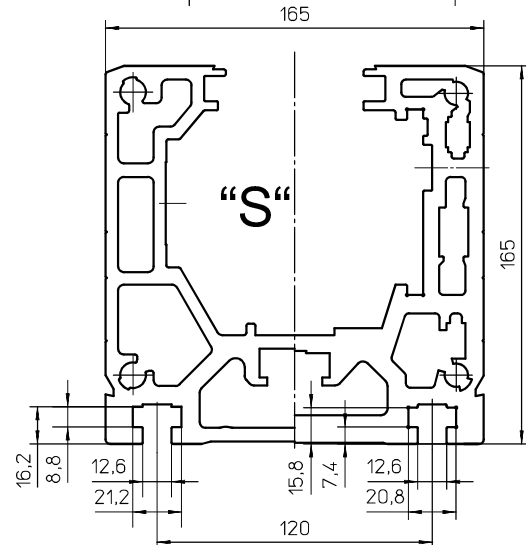


Profile Beta 165 (-C)

	"S"	
Specific mass [kg/m]	19.95	24.57
Surface measure [mm ²]	7392	9102
Geometrical moment of inertia I _y [mm ⁴]	21411115	24649421
Geometrical moment of inertia I _z [mm ⁴]	25986463	31365033
Section modulus W _y [mm ³]	228612	259364
Section modulus W _z [mm ³]	314987	380182

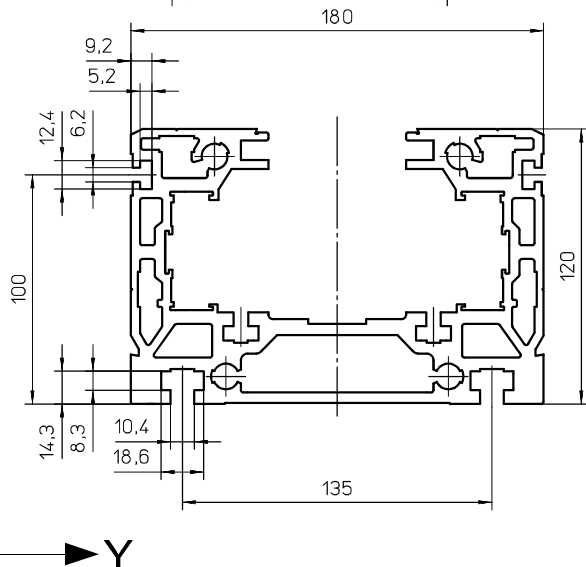


Profile Beta 180 (-C)


Specific mass [kg/m]	15.85
Surface measure [mm ²]	5870
Geometrical moment of inertia I _y [mm ⁴]	9351064
Geometrical moment of inertia I _z [mm ⁴]	24300412
Section modulus W _y [mm ³]	137690
Section modulus W _z [mm ³]	269903




NS 1 - 7 / 11




NS 4.1 / 10




NS 8 / 9 / 12 -14



RM 2 / 4 / 6



BL 1..7

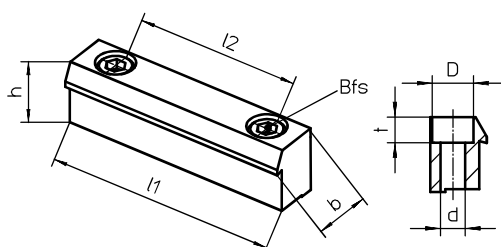

* For further information on page C..E,
see catalogue page Z1.

Bfs = Mounting screw DIN 912 / ISO 4762

Lineardrive	Page*	NS	ID No.	l [mm]	b [mm]	h [mm]	g
Beta 40	C and D	7	31600	16	5.9	1.5	M3
Beta 50-C	E	2	10557	16	10	4	M5
		RM2	15370	10	6	4	M4
Beta 60	C, D And E	8	14644	12	8	4.5	M5
		9	14652	12	8	4.5	M4
		12	16280	12	8	4.5	M3
Beta 70-C	E	2	10557	16	10	4	M5
		RM2	15370	10	6	4	M4
Beta 80(-C)	E	3	10558	20	12	5	M6
		RM4	15371	13	8	6	M5
Beta 100	E	4	10559	18	14	6	M8
		4.1	16552	20	13	6	M8
		10	16499	20	13	6	M6
		RM4	15371	13	8	6	M5
	C and D	1	10556	12	10	4	M4
		2	10557	16	10	4	M5
Beta 100-D Beta 140-C	E	RM2	15370	10	6	4	M4
		4.1	16552	20	13	6	M8
	C and D	10	16499	20	13	6	M6
		8	14644	12	8	4.5	M5
		9	14652	12	8	4.5	M4
		12	16280	12	8	4.5	M3
Beta 110(-C)	E	4.1	16552	20	13	6	M8
		5	10560	20	14	8	M8
		10	16499	20	13	6	M6
	C and D	1	10556	12	10	4	M4
		2	10557	16	10	4	M5
		11	18714	12	10	3.5	M4
Beta 120	E	RM2	15370	10	6	4	M4
		4.1	16552	20	13	6	M8
		5	10560	20	14	8	M8
	C and D	10	16499	20	13	6	M6
		1	10556	12	10	4	M4
		2	10557	16	10	4	M5
Beta 120-C	C, D and E	RM2	15370	10	6	4	M4
		14	18481	22	13.5	7.6	M8
		10	16499	20	13	6	M6
Beta 140	E	13	18479	22	13.5	7.6	M4
		3	10558	20	12	5	M6
		4.1	16552	20	13	6	M8
	C and D	10	16499	20	13	6	M6
		RM4	15371	13	8	6	M5
		1	10556	12	10	4	M4
Beta 165(-C)	E	RM2	15370	10	6	4	M4
		6	10561	25	18	8	M10
Beta 180(-C)	E	RM6	15372	18	10	8	M6
		6	10561	25	18	8	M10
	C and D	RM6	15372	18	10	8	M6
		3	10558	20	12	5	M6
		RM2	15370	10	6	4	M4

Linear drive	BL	ID No.	l1 [mm]	l2 [mm]	b [mm]	h [mm]	Bfs	D [mm]	d [mm]	t [mm]
Beta 40	1	10552	70	50	15	17,5	M6	11	6,6	6,8
Beta 50-C	1	10552	70	50	15	17,5	M6	11	6,6	6,8
Beta 60	5	14489	70	50	15	13	M6	11	6,6	6,8
Beta 70-C	1	10552	70	50	15	17,5	M6	11	6,6	6,8
Beta 80(-C)	2	10553	70	50	15	20	M6	11	6,6	6,8
Beta 100	2	10553	70	50	15	20	M6	11	6,6	6,8
Beta 100-D	5	14489	70	50	15	13	M6	11	6,6	6,8
Beta 110(-C)	2	10553	70	50	15	20	M6	11	6,6	6,8
Beta 120	1	10552	70	50	15	17,5	M6	11	6,6	6,8
Beta 120-C	7	18430	70	50	16	25	M6	11	6,6	7
Beta 140(-C)	2	10553	70	50	15	20	M6	11	6,6	6,8
Beta 165(-C)	3	10554	80	60	25	30	M8	15	9	9
Beta 180(-C)	3	10554	80	60	25	30	M8	15	9	9

Example:

Beta 80-ZRS-32 AT5-E-220-1000-1420-AK-AZ1-8RM4-1

Product

Size (version*)

Drive

Z = Toothed belt drive

0 = Without drive

A = Powered carriage

Guide system

R = Roller guide

S = Rail guide

G = Sliding guide

0 = Without guide

Model

S = Standard

Drive specifications

Width and type of toothed belt

Stroke per revolution

Stroke

Total length

Cover

AK = Cover band (Note: Total length is greater for Beta 80 and Beta 100)

Accessories

AZ1 = Drive shaft short, mounting side **C**

AZ1-GX = Drive shaft long without feather key groove, mounting side **C**

AZ2 = Drive shaft short, mounting side **D**

AZ2-GX = Drive shaft long without feather key groove, mounting side **D**

AZ6 = Drive shaft short, mounting side **C** and **D**

AZ6-GX/C = Drive shaft short, mounting side **D** and
Drive shaft long without feather key groove, mounting side **C**

AZ6-GX/D = Drive shaft short, mounting side **C** and
Drive shaft long without feather key groove, mounting side **D**
Further arrangements for drive shaft, see **page Z1**

AZx-S = Drive shaft special (x=1 side **C**, x=2 side **D**, x=6 side **C** und **D**)

EO2 / EO10 = Inductive limit switch NC with 2 m / 10 m cable fitted

ES2 / ES10 = Inductive limit switch NO with 2 m / 10 m cable fitted

EMS / EMB = Mechanical limit switch (S = Siemens, B = Balluff) fitted

BL = Mounting bracket

NS / RM = Sliding block 1 .. 14 / Rhomb nut 2 .. 6 (See Table on **page B50**)

Special design

0 = Standard

1 = Special (add specification description)

Further accessories (separate position)

MGK = Motor mounting and coupling (according to dimension sheet)

URT = Deflection belt drive (according to dimension sheet)

* e.g. Beta 80-ZSS or Beta 80-C-ZSS

Example:

Beta 80-SRS-M-2020-1000-1430-2SA-2ES2-0

Product

Size (version*)

Drive

S = Spindle

0 = Without drive

Guide system

R = Roller guide

S = Rail guide

G = (Auxiliary) sliding guide

0 = Without guide

Model

S = Standard

V = Feed axis

F = Guide outside

Type of drive

M = Single nut (ball screw)

MM = Double nut (ball screw)

(TR = Trapezoidal nut - optional)

Drive specifications

Diameter and pitch (ball screw)

(Diameter x pitch (trapezoidal screw) - optional)

Stroke

Total length

Spindle support (SA)

(quantity)

Accessories

EO2 / EO10 = Inductive limit switch NC with 2m / 10m cable fitted

EMS / EMB = Mechanical limit switch (S = Siemens, B = Balluff) fitted

ES2 / ES10 = Inductive limit switch NO with 2m / 10m cable fitted

BL = Mounting bracket

NS / RM = Sliding block 1 .. 14 / Rhomb nut 2 .. 6 (see Table on page B50)

Special design

0 = Standard

1 = Special (add specification description)

Further accessories (separate position)

MGK = Motor mounting and coupling (according to dimension sheet)

URT = Deflection belt drive (according to dimension sheet)

KRG = Bevel gear directly mounted

For mounting of limit switches and lubrication points, see page Z1

Cover band comes as standard for screw drive


Further drives available on request:

MK or TK (= single nut made of plastic), KK (= double nut made of plastic)

* e.g. Beta 70-A-SRS or Beta 70-C-SRS


Chapter Z

Accessories

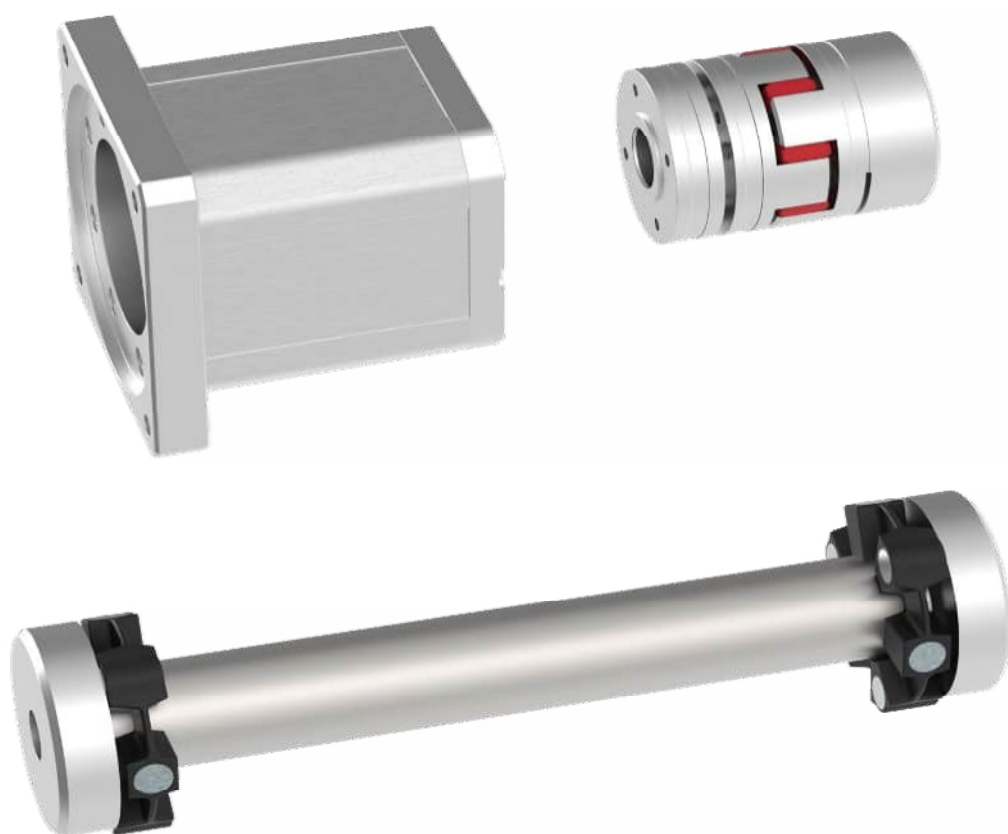

Ordering code for limit switch positions, limit switch type (EN),
lubrication ports and drive shafts (AZ) and wiper versions

Limit switch position

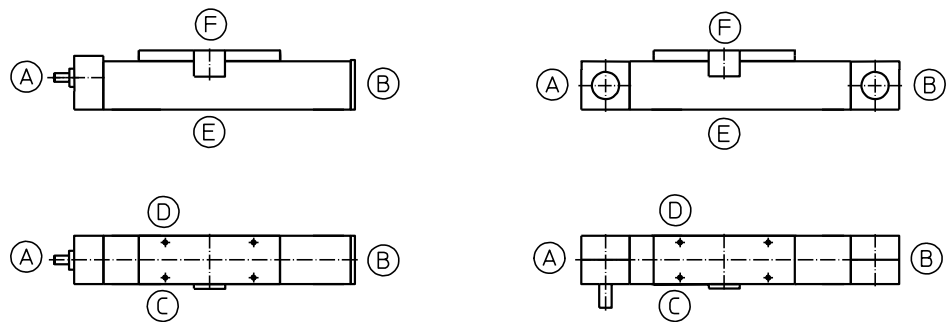

Limit switch types (EN)

EO2	= Inductive proximity switch "Normally Closed"	with 2 m cable (33003)
EO10	= Inductive proximity switch "Normally Closed"	with 10 m cable (10401)
ES2	= Inductive proximity switch "Normally Open"	with 10 m cable (10402)
ES10	= Inductive proximity switch "Normally Open"	with 2 m cable (10403)
EMS / EMB	= Mechanical limit switch "normally closed" (S = Siemens, B = Balluff; without cable)	


Insofar as there are no other specifications provided, the limit switches are fitted as follows (standard):

1. Switch: **EO2 NC** with 2 m cable on page C, pos. A, cable exit at A
Switching point = Mechanical end position
2. Switch: **EO2 NC** with 2 m cable on page C, pos. B, cable exit at B
Switching point = Mechanical end position
3. Switch: **ES2 NO** with 2 m cable on page C, pos. A, cable exit at A
Switching point = Directly beside first switch (as reference)

Lubrication ports


Standard Beta, Delta-C and Alpha: Lubricating nipple M8x1, page **C + D**
(exception: Delta = M6; Beta 40, Beta 70-C-ARS-ASS = drive in lubrication nipple)

Drive shafts (AZ)

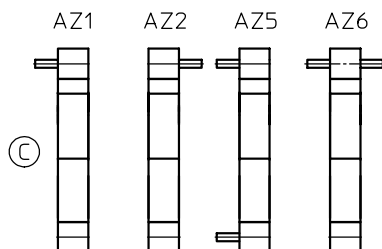


Wiper versions

(Design is based on carriage plate)

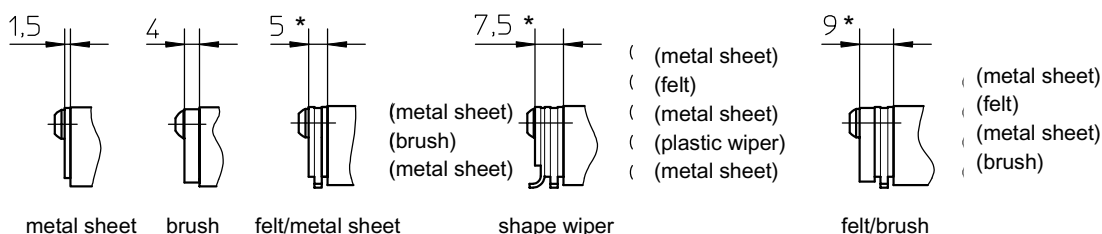

* Bei Beta 165(-C)
und Beta 180(-C)
+ 2 mm

URT can be turned 90° when mounted

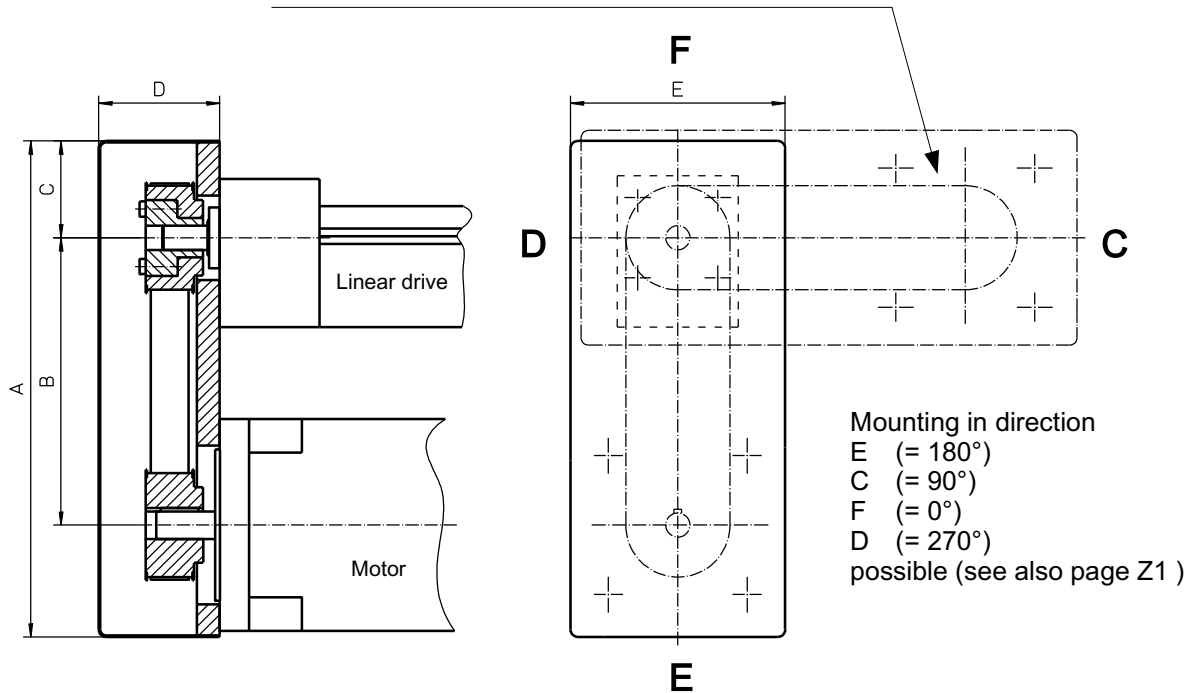

Linear drive version			URT version	A	B*	C	D	E
Beta 40 Beta 50-C	Delta 90 Delta 110		URT 1	195	105 ±10	41	45	90
Beta 60 Beta 70-C	Delta 145-C	Alpha 15-B	URT 2	238	120 ±10	46	52	102
Beta 80(-C) Beta 100-D Beta 110 Beta 120-C Beta 140(-C) Beta 165(-C) Beta 180(-C)	Delta 200 Delta 240	Alpha 20-B Alpha 30-B Alpha 35-B	URT 3	328	190 ±10	64	80	142

* Centre distance B: depending on ratio and toothed belt

Possible gear ratios:

i = 1:1

i = 2:1

i = 3:1**

Note: Depending on the motor shaft diameter and necessary drive moment, all ratios may not be possible

** maximum possible motor shaft diameter with shaft without feather key:

URT 1: not possible


URT 2: 11

URT 3: 15

Motor mounting shown in direction E (= 180°) (dashed C (= 90°))

Bevel gear mounting (KRG)

Unit size	Gear types	Version	Ratio	b	l2	l3	l4	n	s	t
Beta 40	V065	E0N0, K0N0	1:1 ... 3:1	65	11	53	95	42	M6	54
Beta 50-C	V065	E0N0, K0N0	1:1 ... 3:1	65	11	53	95	42	M6	54
Beta 60	V065	E0N0, K0N0	1:1 ... 3:1	65	16	58	100	42	M6	54
Beta 60-SGV	V065	E0N0, K0N0	1:1 ... 3:1	65	16	58	100	42	M6	54
Beta 70-C	V065	E0N0, K0N0	1:1 ... 3:1	65	16	58	100	42	M6	54
Beta 80	V090	E0N0, K0N0	1:1 ... 6:1	90	20	75	130	55	M8	75
Beta 100-D	V090	E0N0, K0N0	1:1 ... 6:1	90	20	75	130	55	M8	75
Beta 110	V090	E0N0, K0N0	1:1 ... 6:1	90	20	75	130	55	M8	75
Beta 110-C-SGV	V120	E0N0, K0N0	1:1 ... 6:1	120	30	102	174	75	M10	100
Beta 120-C	V120	E0N0, K0N0	1:1 ... 6:1	120	30	102	174	75	M10	100
Beta 140(-C)	V090	E0N0, K0N0	1:1 ... 6:1	90	20	75	130	55	M8	75
Beta 165(-C)	V120	E0N0, K0N0	1:1 ... 6:1	120	30	102	174	75	M10	100
Beta 180(-C)	V120	E0N0, K0N0	1:1 ... 6:1	120	30	102	174	75	M10	100
Delta 90	V065	E0N0, K0N0	1:1 ... 3:1	65	16	58	100	42	M6	54
Delta 110-C	V065	E0N0, K0N0	1:1 ... 3:1	65	18	58	100	42	M6	54
Delta 145-C	V090	B0,C0,G0,H0	1:1 ... 6:1	90	94	149	204	55	M8	75
Delta 200	V120	B0,C0,G0,H0	1:1 ... 6:1	120	112	184	256	75	M10	100
Delta 240(-C)	V120	B0,C0,G0,H0	1:1 ... 6:1	120	112	184	256	75	M10	100
Alpha 15-B-155	V065	E0N0, K0N0	1:1 ... 3:1	65	16	58	100	42	M6	54
Alpha 20-B-225	V090	E0N0, K0N0	1:1 ... 6:1	90	20	75	130	55	M8	75
Alpha 30-B-325	V090	E0N0, K0N0	1:1 ... 6:1	90	20	75	130	55	M8	75
Alpha 35-B-455	V120	E0N0, K0N0	1:1 ... 6:1	120	30	102	174	75	M10	100

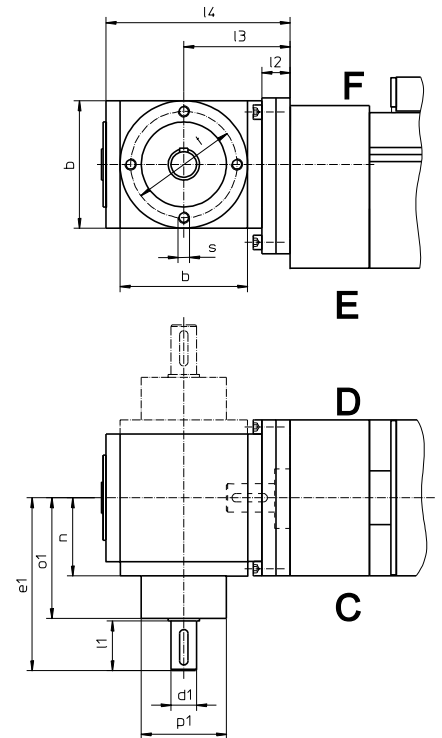


Motor mounting side "C", "D", "E" or "F" (see also page Z1)

Ratio	1:1 – 2:1					3:1					4:1					5:1 – 6:1				
Unit size	d1	l1	e1	o1	p1	d1	l1	e1	o1	p1	d1	l1	e1	o1	p1	d1	l1	e1	o1	p1
Beta 40	12	26	100	72	44	12	26	100	72	44										
Beta 50-C	12	26	100	72	44	12	26	100	72	44										
Beta 60	12	26	100	72	44	12	26	100	72	44										
Beta 60-SGV	12	26	100	72	44	12	26	100	72	44										
Beta 70-C	12	26	100	72	44	12	26	100	72	44										
Beta 80	18	35	122	85	60	12	35	122	85	60	12	35	132	95	60	12	35	132	95	60
Beta 100-D	18	35	122	85	60	12	35	122	85	60	12	35	132	95	60	12	35	132	95	60
Beta 110	18	35	122	85	60	12	35	122	85	60	12	35	132	95	60	12	35	132	95	60
Beta 110-C-SGV	25	45	162	115	80	20	45	162	115	80	20	45	172	125	80	15	35	162	125	70
Beta 120-C	25	45	162	115	80	20	45	162	115	80	20	45	172	125	80	15	35	162	125	70
Beta 140(-C)	18	35	122	85	60	12	35	122	85	60	12	35	132	95	60	12	35	132	95	60
Beta 165(-C)	25	45	162	115	80	20	45	162	115	80	20	45	172	125	80	15	35	162	125	70
Beta 180(-C)	25	45	162	115	80	20	45	162	115	80	20	45	172	125	80	15	35	162	125	70
Delta 90	12	26	100	72	44	12	26	100	72	44										
Delta 110-C	12	26	100	72	44	12	26	100	72	44										
Delta 145-C	18	35	122	85	60	12	35	122	85	60	12	35	132	95	60	12	35	132	95	60
Delta 200	25	45	162	115	80	20	45	162	115	80	20	45	172	125	80	15	35	162	125	70
Delta 240(-C)	25	45	162	115	80	20	45	162	115	80	20	45	172	125	80	15	35	162	125	70
Alpha 15-B-155	12	26	100	72	44	12	26	100	72	44										
Alpha 20-B-225	18	35	122	85	60	12	35	122	85	60	12	35	132	95	60	12	35	132	95	60
Alpha 30-B-325	18	35	122	85	60	12	35	122	85	60	12	35	132	95	60	12	35	132	95	60
Alpha 35-B-455	25	45	162	115	80	20	45	162	115	80	20	45	172	125	80	15	35	162	125	70

All bevel gears are lubricated for life with synthetic oil (lubrication B0). Maximum duty cycle 40 %.

For a longer duty cycle, please order "lubrication B1" and specify mounting position. Angular play <20 minutes.

Versions:

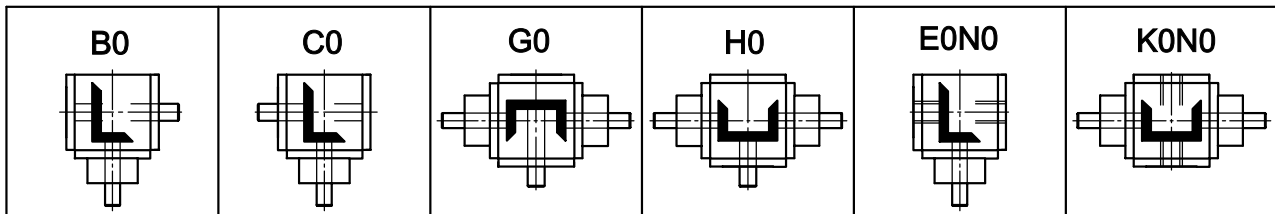

(Pay attention to diameter of sleeve shaft of version E0N0 / K0N0.)

Allowed output nominal torque (Nm) at input rotation speed 3000 min⁻¹

Atek-Gears

Gear	Ratio i							Ø Sleeve shafts of Version E0N0 / K0N0
	1:1	1,5:1	2:1	3:1	4:1	5:1	6:1	
065	10	10	10	10	-	-	-	12
090	27	25	23	23	23	23	23	18
120	66	61	56	58	60	60	54	25

Nidec Graessner-Gears

Power Gear	Ratio i					
	1:1	1,5:1	2:1	3:1	4:1	5:1
P54	15	15	12	12	-	-
P75	45	45	42	33	28	25
P90	78	78	68	54	52	40
P110	150	150	150	120	100	85


At allowed values there are only limited** thermal limiting performances considered.
This applies to both producers.
Details see documentation of producers (Atek and Nidec Graessner).

** switch-on time ED = 40 %, rotation speed 3000 U/min, ambient temperature 20 °C


Joint shaft mounting (GX)

Toothed belt drive

Dimension AA = Centre distance between mechanical linear drives

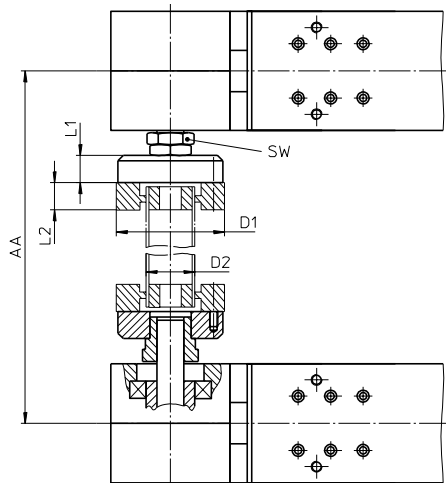

Threaded spindle drive

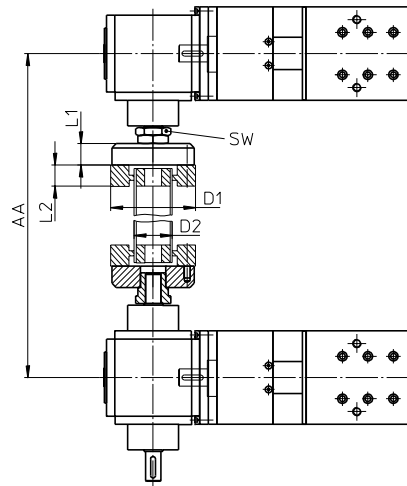

Linear Drive	Size	Moment max. [Nm]	AA min.	SW
Beta 40-ZSS	GX1	8	159	22
Beta 50-C-ZRS	GX1	12	169	22
Beta 60-ZSS	GX2	22	201	27
Beta 60-SSS	GX2		281	22
Beta 60-SGV	GX2		281	22
Beta 70-C-ZRS-ZSS	GX2	31	211	27
Beta 70-C-SRS-SSS	GX2		281	27
Beta 80-ZRS-ZSS	GX2	47	231	27
Beta 80-SRS-SSS	GX2		325	36
Beta 80-C-ZRS-ZSS	GX4	74	241	36
Beta 100-ZRS-ZSS	GX4	89	261	36
Beta 100-D-ZSS	GX4	38	261	36
Beta 100-D-SSS	GX4		331	36
Beta 110-ZRS-ZSS	GX4 / GX8*	191	293 / 323	46
Beta 110-SRS-SSS	GX4		331	36
Beta 120-ZRS-ZSS	GX4 / GX8*	153	303 / 333	46
Beta 120-C-ZSS	GX4 / GX8*	229	303 / 333	46
Beta 120-C-SSS	GX4		395	46
Beta 140-ZRS-ZSS	GX4 / GX8*	140	323 / 353	46
Beta 140-SRS-SSS	GX4		331	36
Beta 140-C-ZSS	GX4 / GX8*	140	323 / 353	46
Beta 140-C-SSS	GX4		331	36
Beta 165-ZSS	GX16	700	398	55
Beta 165(-C)-SGV / -SSF	GX8		435	46
Beta 165-SSS	GX8		435	46
Beta 180-ZSS	GX8 / GX16*	306	393 / 413	55
Beta 180-SSS	GX8		435	46
Beta 180-C-ZSS	GX8 / GX16*	370	393 / 413	55
Beta 180-C-SSS	GX8		435	46


Linear Drive	Size	Moment max. [Nm]	AA min.	SW
Gamma 90-ZSS	GX4	77	241	36
Gamma 90-ZSSD	GX2	37	235	36
Gamma 120-ZSS	GX4	90	261	36
Gamma 120-ZSSD	GX4	57	264	36
Gamma 160-ZSS	GX4 / GX8*	153	303 / 333	46
Gamma 160-ZSSD	GX4	74	305	46
Gamma 220-ZSS	GX8 / GX16*	306	393 / 413	55
Gamma 220-ZSSD	GX4 / GX8*	107	325 / 377	46
Gamma 280-ZSS	GX16	450	398	55
Gamma 280-ZSSD	GX8 / GX16*	300	393 / 409	50
Sigma 70-ZRS	GX2	22	201	27
Sigma 90-ZRS	GX2	36	211	27
Sigma 90-ZRSD	GX2	18	217	27
Sigma 120-ZRS	GX4	89	246	36
Sigma 120-ZRSD	GX4	57	264	36
Sigma 160-ZRS	GX4 / GX8*	153	303 / 333	46
Sigma 160-ZRSD	GX4	77	303 / 333	46

Size	D1	D2		L1	L2
		St	VA		
GX1	57	30x2	30x2.0	20	24
GX2	88	40x2,5	40x2.5	20	24
GX4	100	45x2,5	44,5x1.5	25	28
GX8	125	60x2,5	60,3x1.6	30	32
GX16	155	70x1,5	70,0x2.0	50	35

* The larger version is to be selected where necessary.

This table is a selection. More sizes and combinations on request.


Pillow bearing drawing

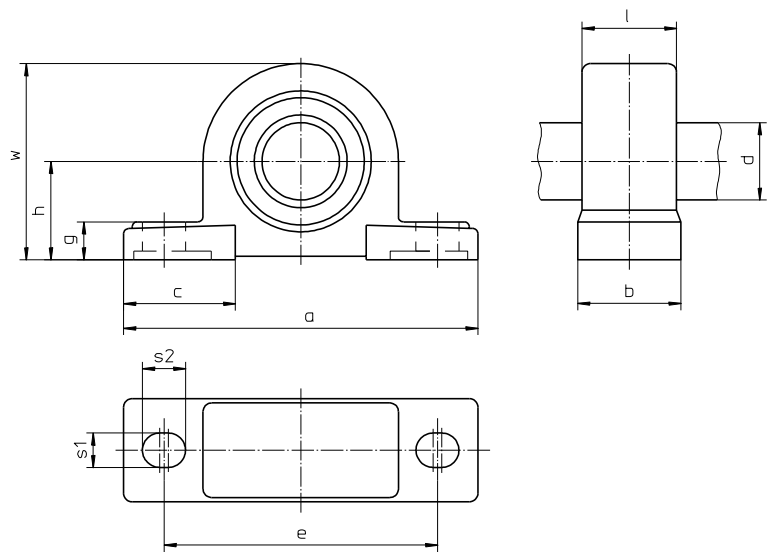

For Joint shaft	a	b	c	d	e	g	h	l	s1	s2	w	Weight GX-shaft in kg			
												Length 500 mm complete		100 mm tube	
												St	VA	St	VA
GX1	167	48	54	30	127	19	47,6	43	17	21	92	1.20	1.21	0.14	0.14
GX2	190	54	60	40	146	20	54	50	17	22	106	2.37	2.42	0.23	0.23
GX4	206	60	65	45	159	22	57,2	55	20	25	114	3.56	3.11	0.26	0.16
GX8	265	70	77	60	203	27	76,2	65	25	29	150	6.08	5.55	0.35	0.23
GX16	292	78	85	70	232	30	88,9	64	25	31	175	11.03	11.37	0.26	0.34


Joint shaft diagram

Depends on length and revolution

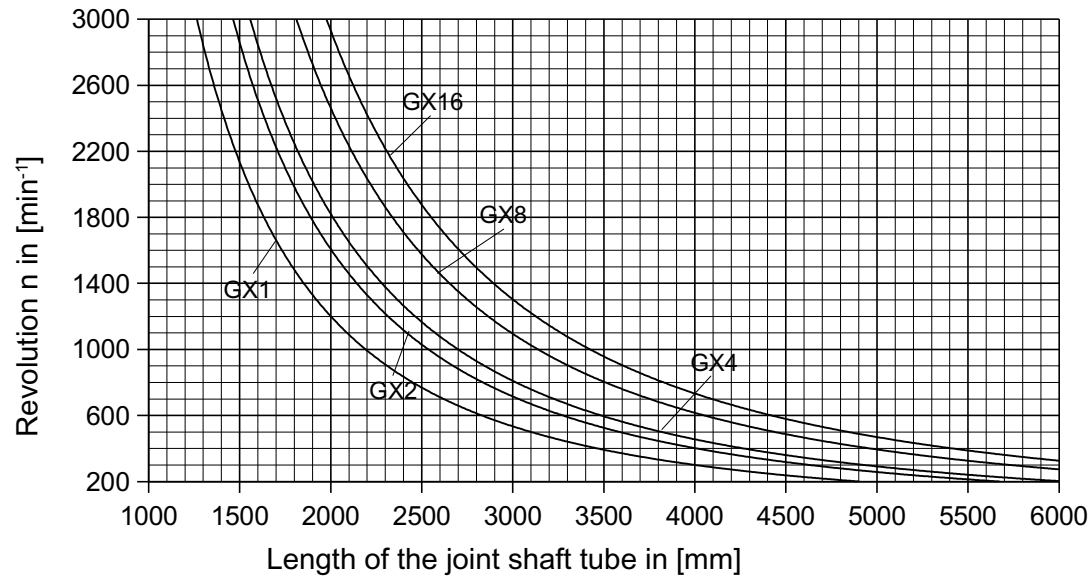

Motor mounting, coupling (MGK)

Standard motor mounting (3-part)

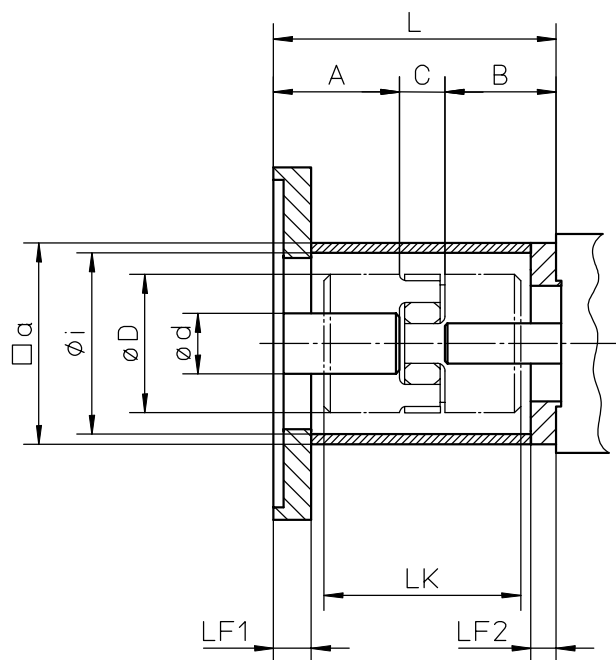

Gr.	□ α	∅ i	LF1	LF2
55	55	46	15	8
80	80	69	15	10
110	110	88	20	15

$$L = A + B + C$$

A = Length of drive shaft of motor/gear

B = Length of drive journal of mechanical linear drive

C = See Table for Coupling Sizes


Size of coupling

	9	12	14	19	24	28
C	10	12	13	16	18	20
∅ d _{max}	11	12	16 (14)	20	28	38
∅ D	20	25	30	40	55	65
LK	30	34	35 (50)	66	78	90

Clamping hub and clamping ring (from size 14) possible.
Dimensions in brackets apply for clamping ring.


Chapter X

Custom Designs

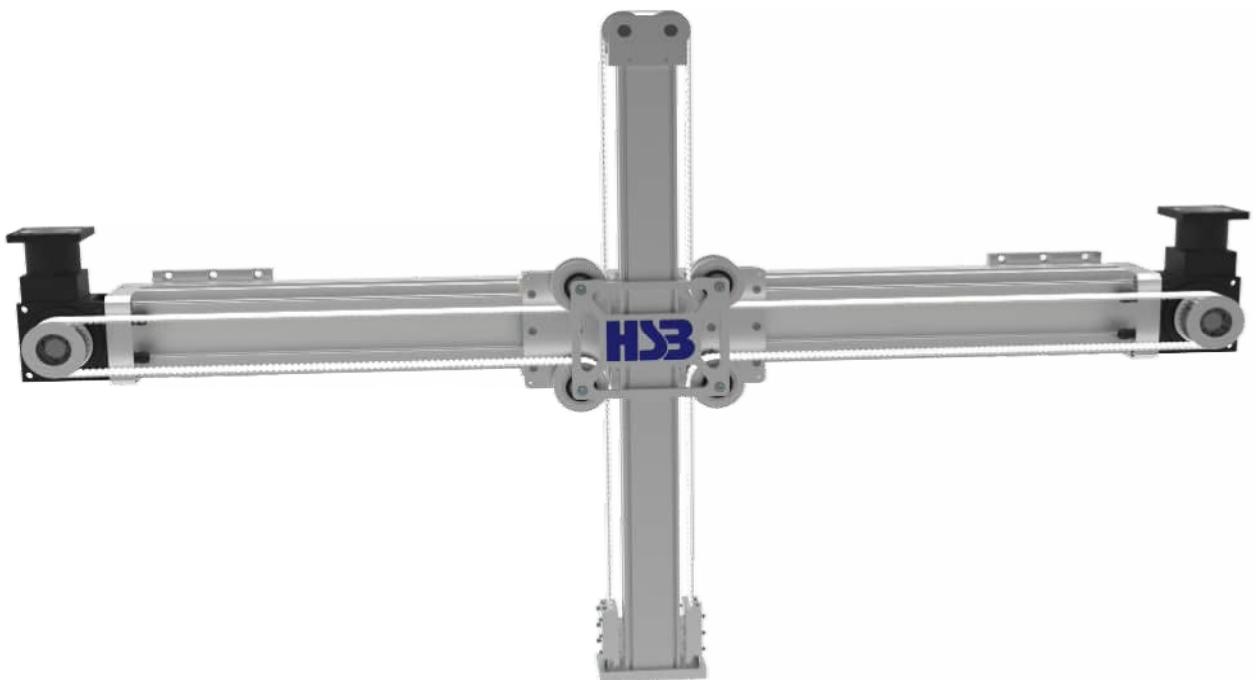



1

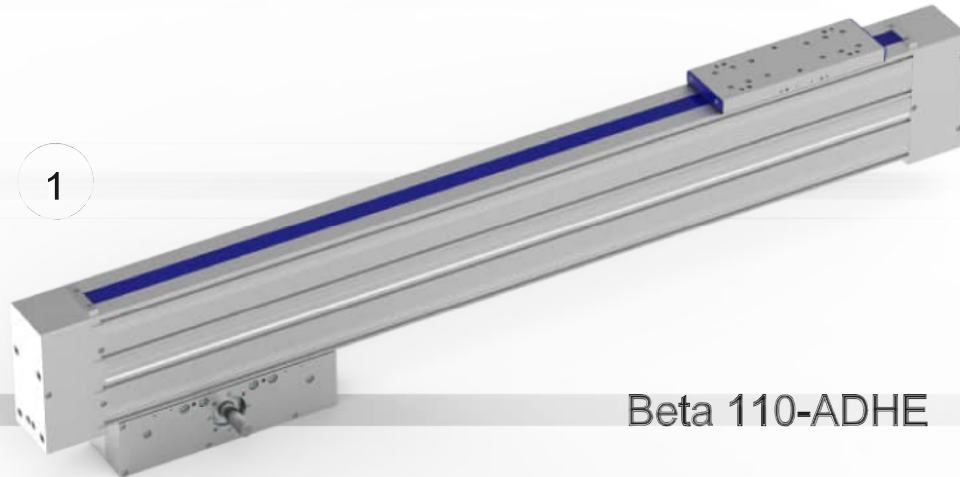

Beta 110-ADHE

The ADHE design (driven carriage, duplex unit) is currently available in sizes 50 and 110 but can in principle be supplied in the HSB-beta® series sizes.

The lower carriage with the gearbox/motor detects that the profile tube and the top carriage are travelling. There is therefore a relative/ double stroke action. An outrigger can be attached to the upper carriage and thereby e.g. a spray lance with a single profile length of the linear unit can be immersed into a tool by the doubled stroke.

The upper linear unit with the single carriage is enclosed by the covering strip.

2



Beta 100-D-ASS
Rotator

The HSB-beta®-ARS-ASS versions are often used with a vertical axis.

The carriage and drive are upright and the profile tube runs vertically.

The gripper/attachments often also need to rotate.

This can be implemented very simply with the HSB rotator.


A top and bottom-mounted tube is fed through the rear cavity of the profile.

A servo motor is attached at the top by a timing belt drive (or motor mounting)

while the gripper or attachment can be attached to the adapter plate on the bottom.




3

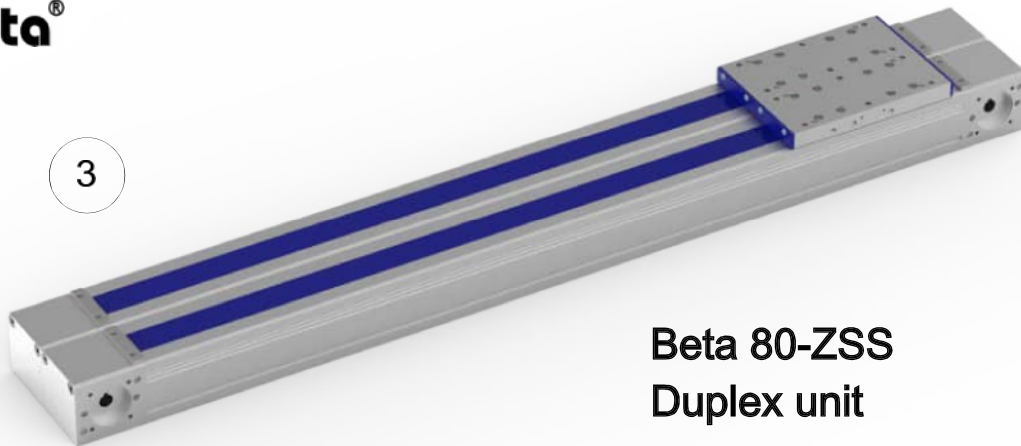

**Beta 80-ZSS
Duplex unit**

4

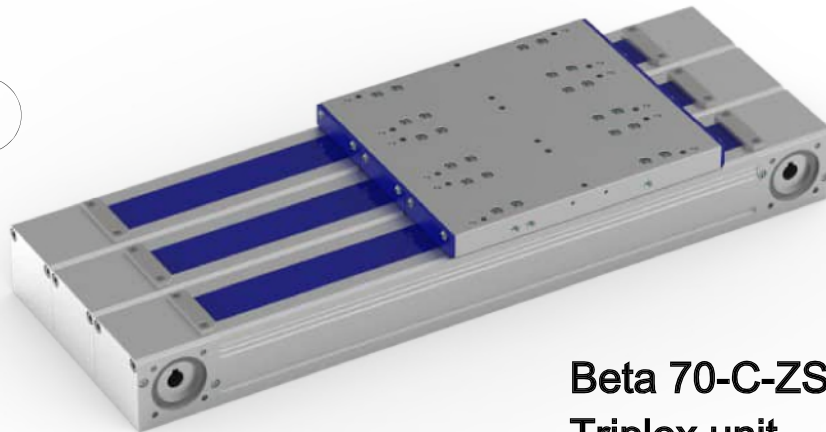

**Beta 70-C-ZSS
Triplex unit**

With a spindle or toothed belt drive, all HSB-beta® series sizes can be converted into duplex/triplex or multiple units.


Profiles are screwed/glued together. The result is a broad, flat linear unit. A shared carriage plate allows large torques to be accommodated in the M_x direction. With a shared drive (toothed belt units) it is possible to generate greater thrust forces.

Counter-acting movements can be implemented with single carriage plates.

If different spindle pitches are used it is possible to realise different speeds from the same engine speed.

HSB-delta®

5

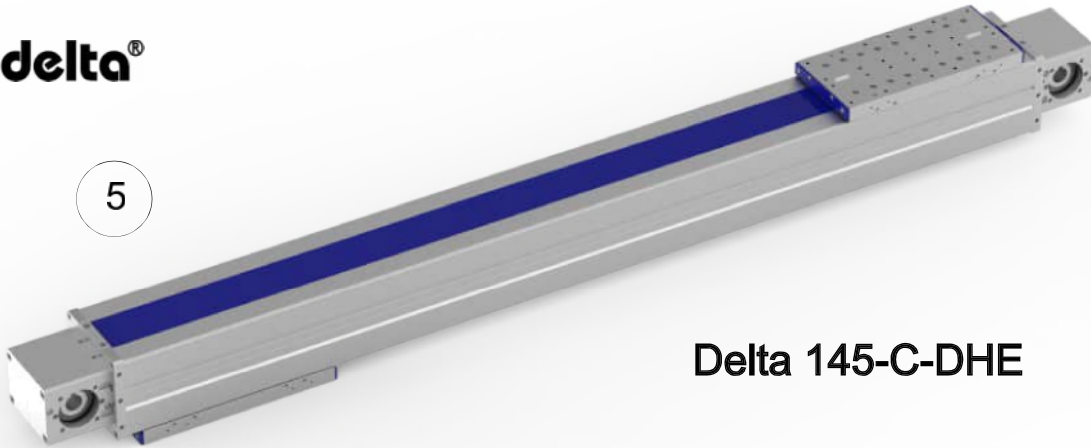


Delta 145-C-DHE

The DHE (double stroke unit) is currently available for the 145 size but other HSB-delta® series sizes are possible in principle.

In this case, along with the flat design and large transferable torques, an optimum ratio of stroke to overall length was required due to the duplex design of the HSB-delta® series.

HSB-kappa®

6

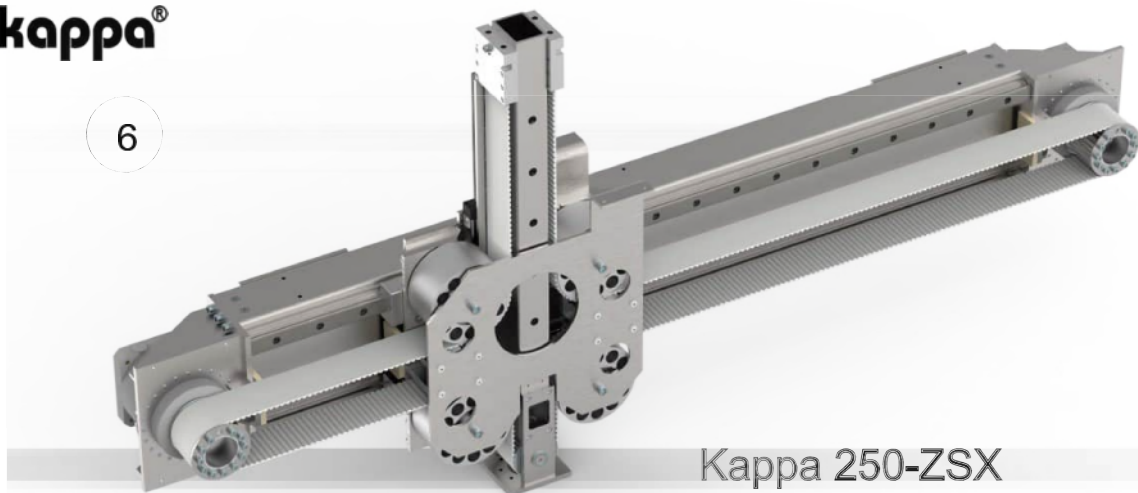

Kappa 250-ZSX

The linear units of the HSB-kappa® series are a particular highlight of HSB Automation GmbH.

The function principle is well known and some of our competitors supply and build this concept as a small system. The challenge for HSB Automation GmbH lay not in the system itself but in the parameters to be achieved:

it needed to move a mass of up to 100 kg horizontally by 2000 mm and vertically by 600 mm with 30 strokes/ minute. All components had to be non-rusting since it was for the food industry.

To save mass and weight in the vertical axis conventional linear units were out of the question. The drive which had to be co-transported (gearbox and servomotor with brake) overstressed every system. We therefore opted for the system with two vertical motors and a toothed belt.

Chapter TL

Technology

Linear

Linear Tables

HSB-alpha®

Mechanical Linear Drive

HSB-beta®

Compact Module

HSB-delta®

Portal Linear Drive





HSB-gamma®

Portal Linear Drive






HSB-sigma®

Examples of multi-axis systems

Type **HB-beta**[®]

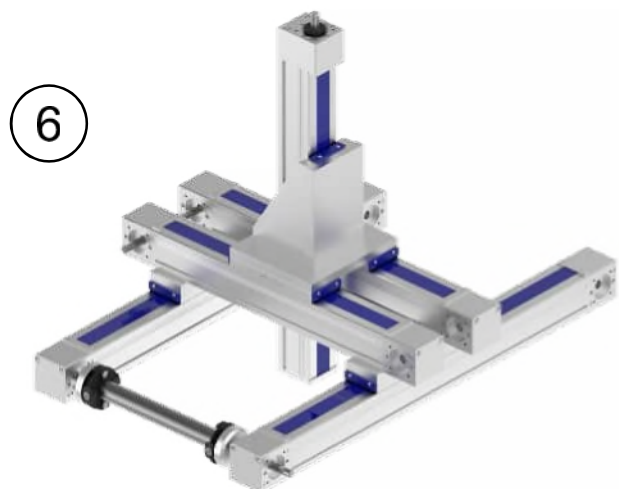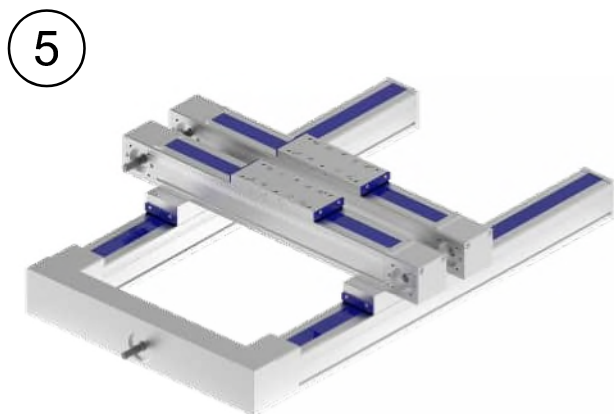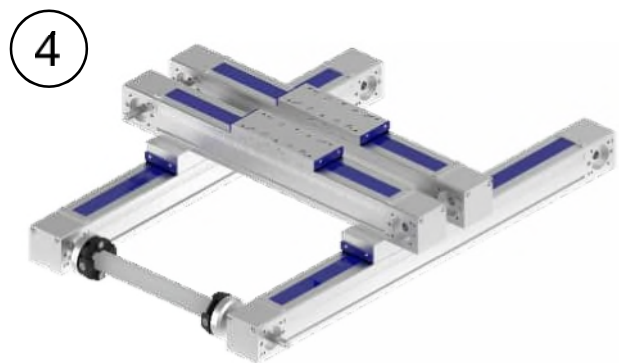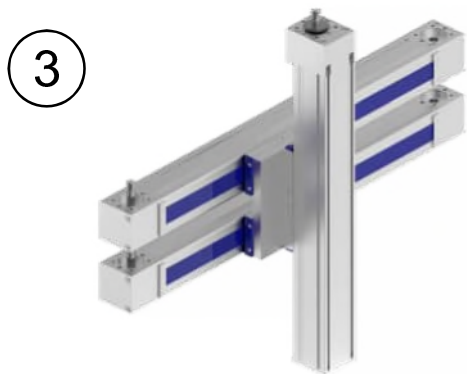

Types **HSB-delta**® and **HSB-alpha**®

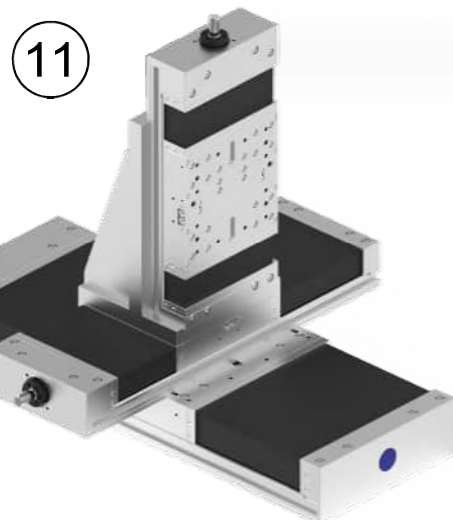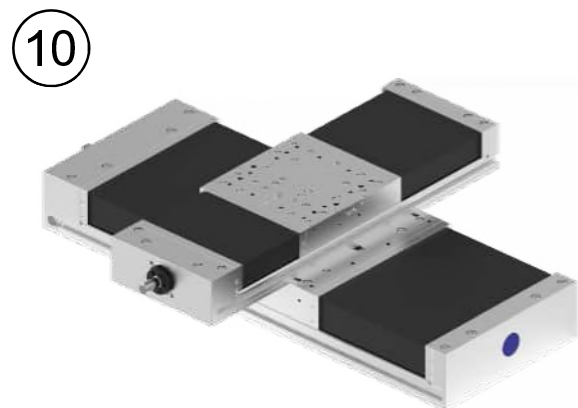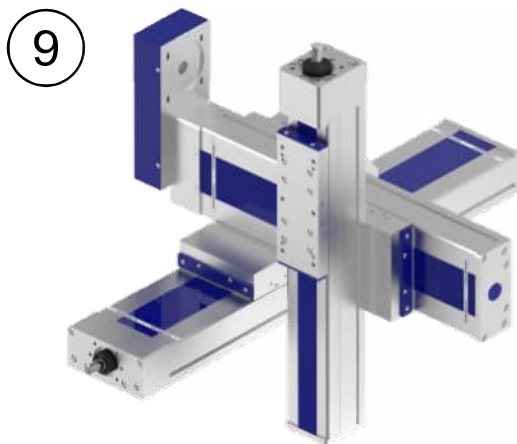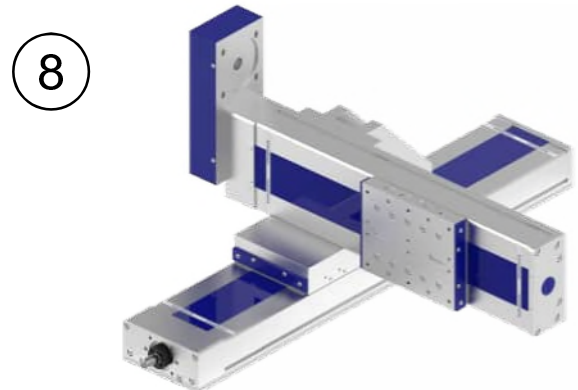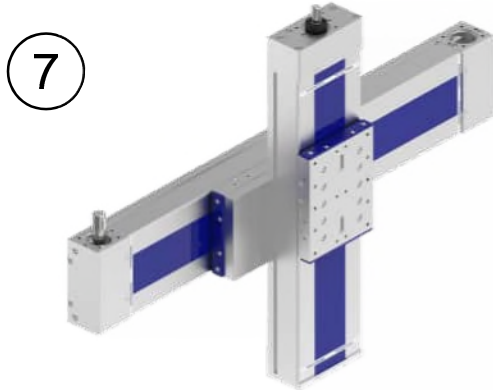

Our Products

Mechanical Linear Drives



with spindle drive or toothed belt drive
with rail guide or roller guide

Compact Modules



with spindle drive or toothed belt drive
with rail guide

Linear Tables



with spindle drive
with rail guide

Portal Linear Drive



with rack-and-pinion drive or toothed belt drive
with rail guide

Portal Linear Drive



with toothed belt drive
with roller guide

Customised solutions

In accordance with customer requirements (e.g.: ex-protection according to Atex, corrosion-resistant, clean room compatible, toothed belt linear drive right/left, etc.) .

Handling systems

For the most varied of industries

Accessories

Fixing parts, proximity switches, gears, motor mountings, couplings, belt drives with various gear ratios

Selection criteria for the guide system

Roller guide

Smooth travel thanks to optimum rolling characteristics
Low noise thanks to quiet rolling
High moment acceptance thanks to optimum load transmission into profile
Large stroke lengths possible without a problem
Low maintenance due to long-life lubrication of rollers
Low-cost alternative to rail guide

Rail guide

High load capacity of guide
Longer service life
High level of guiding accuracy



Further information regarding the performance overview

All specifications refer to the standard configuration. The values given for special designs may deviate considerably. The loads specified are the maximum single loads possible for the entire system. If there are different loads (several different forces or moments), the single permissible loads are lower. There may be elastic deformations which will influence the level of accuracy. For mechanical linear drives with roller guides, the static load rating (C_{stat}) applies for static loads.

Repeat accuracy is defined as the ability of the mechanical linear drive to once again return to the same actual position under the same conditions. Conditions such as temperature, load, speed, deceleration and direction of travel may influence the repeat accuracy.

Mechanical Linear Drives with Screw Drive

For calculating service life, the guide and screw drive load ratings are used. Please contact us for further information. The idle torques refer to the respective standard configurations (not double nut or low-backlash single nut) and are measured at a very low speed ($\approx 0 \text{ min}^{-1}$). Production and assembly tolerances vary by $\pm 20 \%$.

The permissible deflection of the linear axis is 0.2 mm/m (1 mm maximum).

For special applications trapezoidal screw drives optional stand for disposal. When used, please ask our technical sales specialists and clarify the exact use.

Mechanical Linear Drives with Toothed Belt Drive

For calculating service life, the guide load ratings are used. Please contact us for further information.

The idle torques refer to the respective standard configurations and are measured at a very low speed ($\approx 0 \text{ min}^{-1}$). Production and assembly tolerances vary by $\pm 20\%$.

The specification for load F_x is the maximum value permitted for low speeds. Please contact us for the maximum value at higher speeds.

The permissible deflection of the linear axis is 0.5 mm/m (2.5 mm maximum).

It is generally recommended to change the toothed belt after 5 to 7 years, as the base material (PU) ages. A theoretical service life calculation is not possible.

Running performance and noise

Contingent on the production tolerances in the used components (e.g. screw or toothed belt drive, guide, mounting, etc.), the running behaviour and noise development for linear drives and linear tables can vary enormously even with the same units. Using customised solutions, such as for example longer spindle supports or damping, the running behaviour can be changed for the better.

Straightness and torsion

All aluminium profiles used for the linear devices and the linear tables are extruded profiles.

The straightness and torsion of these profiles may deviate as a result of the manufacturing process.

The permissible deviations in accordance with DIN 17615 are, however, generally far from exceeded.

However, it may be necessary to align the linear drives using suitable levelling elements or

fix them to a mounting surface machined with sufficient accuracy in order to achieve the desired guiding accuracy. Better tolerances of 0.1 mm / 1000 mm can thus be achieved.

Stroke length


The stroke length specified in the ordering code refers to the maximum permissible stroke.

Acceleration-, braking distances or possible overrun must be taken into consideration here.

We reserve the right to make technical changes to all products!

Drive Dimensions for Mechanical Linear Drives

with screw drive or toothed belt drive

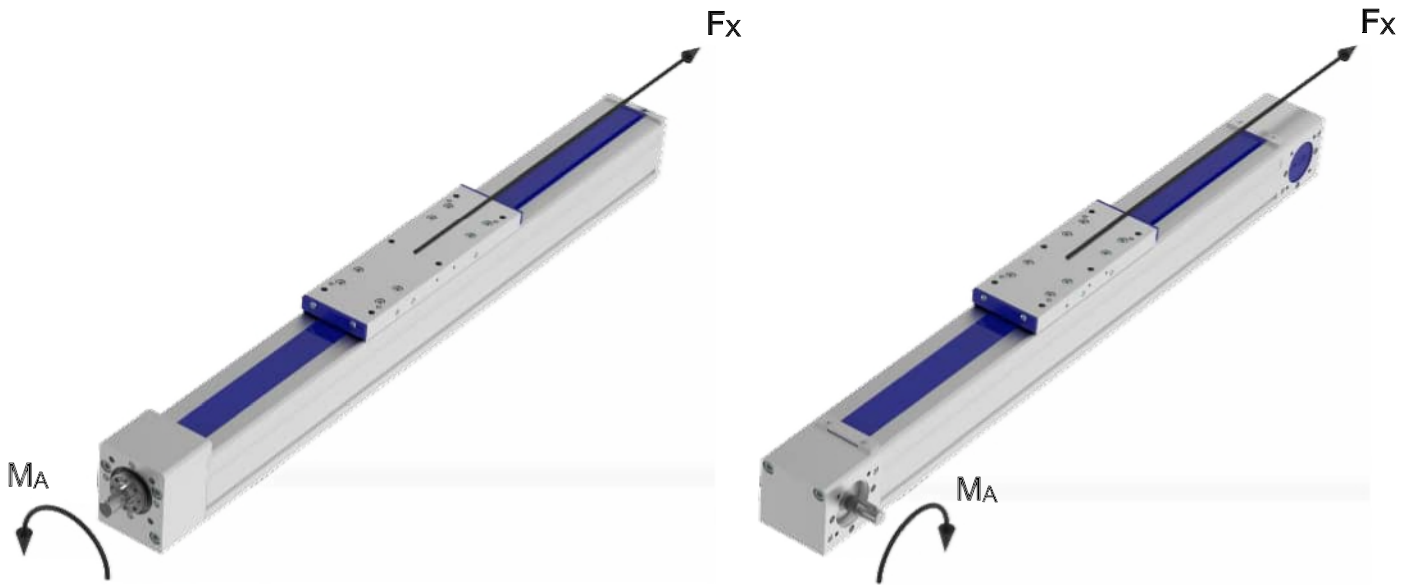

Required drive torque* M_A [Nm]:

$$M_A = M_{load} + M_{idle}$$

Definitions:

- M_A : Required drive torque [Nm]
 M_{load} : Load torque [Nm]
 M_{idle} : See data sheets [Nm]
 F_x : Feed force in horizontal application [N]
 Feed force in vertical application [N]

$$M_{load} = \frac{F_x \cdot p}{2 \cdot \pi \cdot 1000}$$

$$F_x = m \cdot g \cdot \mu + m \cdot a$$

$$F_x = m \cdot (g + a)$$

- | | | | |
|-------|---|---|--------------------------|
| μ | : | Friction coefficient for linear guide | $\mu = 0.006$ |
| | | Friction coefficient for roller guide | $\mu = 0.002$ |
| | | Friction coefficient for sliding guide | $\mu = 0.1$ |
| g | : | Gravitational acceleration [m/s ²] | $g = 9.81 \text{ m/s}^2$ |
| a | : | Acceleration [m/s ²] | |
| m | : | Transport weight [kg] | |
| p | : | Spindle pitch [mm] (screw drive) or stroke per revolution [mm] (toothed belt drive) | |

* (rough estimate)

Forces (**F**) result if

a mass (**m**) being accelerated (**a**).

a mass (**m**) being accelerated due to gravity (**a**).

This means:


$$F_x, F_y = m \cdot a$$

$$F_z = m \cdot (g + a)$$


(vertical applications)

A moment is caused by a force (**F**) acting upon a lever arm (**l**).

This means a force is acting off-centre.

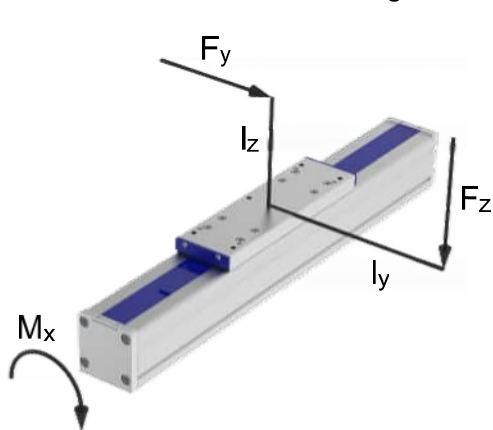


$$M_x = F_y \cdot l_z \text{ oder } F_z \cdot l_y$$

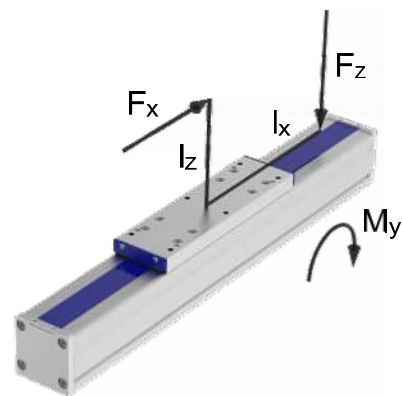

$$M_y = F_x \cdot l_z$$

$$M_y = F_z \cdot l_x$$

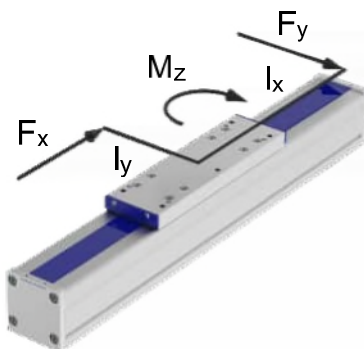

$$M_z = F_x \cdot l_y$$

$$M_z = F_y \cdot l_x$$


In most of the applications, there are combinations of these forces.

The resulting end forces must always be smaller than the permitted values.

For calculating service life, the actual forces are used.

(See following pages)

Forces at the roller guide

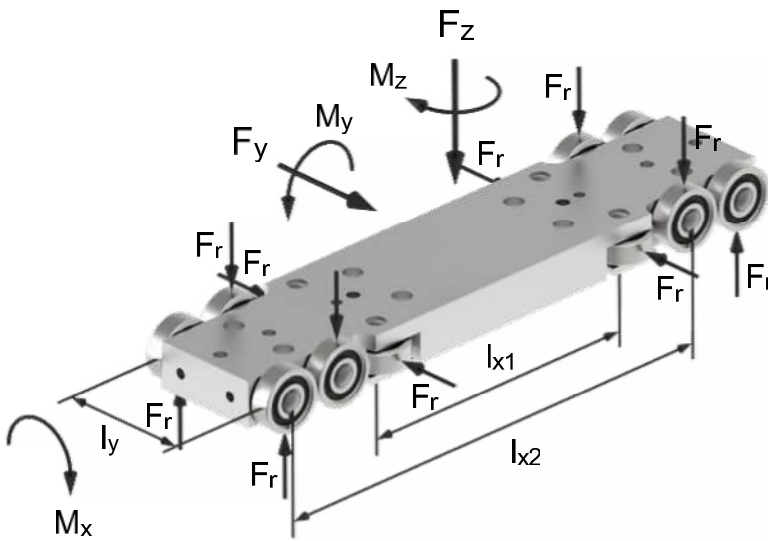

- F_x : Force in feed direction
- F_y : Force in Y direction
- F_z : Force in Z direction
- M_x : Moment for longitudinal axis (X)
- M_y : Moment for lateral axis (Y)
- M_z : Moment for vertical axis (Z)
- F_r : Force on the roller
- l_y : Guiding distance in y direction (see Table on page TL11)
- l_{x1} : Guiding distance in x direction (see Table on page TL11)
- l_{x2} : Guiding distance in x direction (see Table on page TL11)

Direction of force F_y

F_y shared by 2 rollers

$$F_r = F_y \cdot 0.5$$

Direction of force F_z

$+F_z$ and $-F_z$ shared by 4 rollers

$$F_r = F_z \cdot 0.25$$

Moment M_x

M_x shared by 2 rollers

$$F_r = M_x / l_y \cdot 0.5$$

Moment M_y


M_y shared by 2 rollers

$$F_r = M_y / l_{x2} \cdot 0.5$$

Moment M_z

M_z shared by 1 roller

$$F_r = M_z / l_{x1} \cdot 1$$

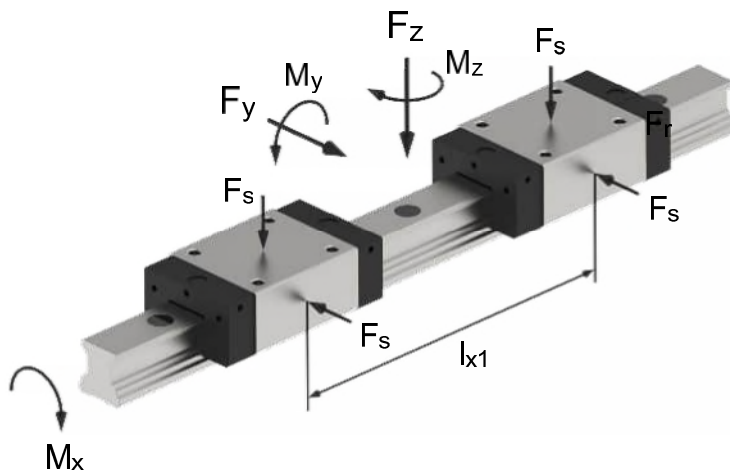

- F_x : Force in feed direction
- F_y : Force in Y direction
- F_z : Force in Z direction
- M_x : Moment for longitudinal axis (X)
- M_y : Moment for lateral axis (Y)
- M_z : Moment for vertical axis (Z)
- M_t : Permissible dynamic moment for the guide carriage
(see Table on page TL12)
- C : Dynamic load rating (C_{dyn}) for the guide carriage
(see Table on page TL12)
- F_s : Force on a carriage
- l_{x1} : Guiding distance in x direction
(see Table on page TL12)

Direction of force F_y

F_y shared by 2 carriages

$$F_s = F_y \cdot 0.5$$

Direction of force F_z

F_z shared by 2 carriages

$$F_s = F_z \cdot 0.5$$

Moment M_x

M_x shared by 2 carriages
With combined external load (F_z and F_y)
in combination with a torsional moment

$$F_s = |F_z| + |F_y| + C \cdot (|M_x| / M_t) \cdot 0.5$$

Moment M_y

M_y shared by 2 carriages
(with opposite direction of force)


$$F_s = M_y / l_{x1} \cdot 1$$

Moment M_z

M_z shared by 2 carriages
(with opposite direction of force)

$$F_s = M_z / l_{x1} \cdot 1$$

Forces at the double rail guide

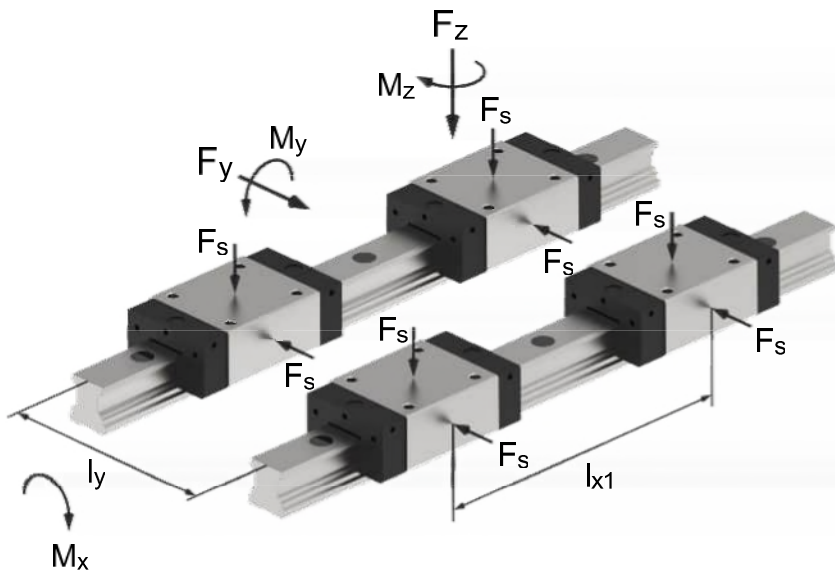

- F_x : Force in feed direction
- F_y : Force in Y direction
- F_z : Force in Z direction
- M_x : Moment for longitudinal axis (X)
- M_y : Moment for lateral axis (Y)
- M_z : Moment for vertical axis (Z)
- F_s : Force on a carriage
- l_y : Guiding distance in y direction (see Table on page TL12)
- l_{x1} : Guiding distance in x direction (see Table on page TL12)

Direction of force F_y

F_y shared by 4 carriages

$$F_s = F_y \cdot 0.25$$

Direction of force F_z

F_z shared by 4 carriages

$$F_s = F_z \cdot 0.25$$

Moment M_x

M_x shared by 4 carriages
(2 per opposite direction of force)

$$F_s = M_x / l_y \cdot 0.5$$

Moment M_y

M_y shared by 4 carriages
(2 per opposite direction of force)

$$F_s = M_y / l_{x1} \cdot 0.5$$

Moment M_z

M_z shared by 4 carriages
(2 per opposite direction of force)

$$F_s = M_z / l_{x1} \cdot 0.5$$

It is primarily the guide values for the mechanical linear drive that are used when calculating nominal service life. The ball screw must also be taken into consideration for the drive with ball screw spindle. With the multitude of parameters crucial for the service life of the entire mechanical linear drive (forces and moments, taking into consideration directions and possible combinations, lead to a moderate load (F_m); ambient conditions, duty cycle...), the following simplified formulae only serve as an initial estimate.

1. Moderate load of the guide or ball screw

$$F_m = (F_1^3 \cdot q_1 / 100 + F_2^3 \cdot q_2 / 100 + F_n^3 \cdot q_n / 100)^{1/3}$$

2. Nominal service life of the roller guide

$$L = (C / F)^3 \cdot 10^5 \cdot R$$

$$F = F_m + F_v$$

3. Nominal service life of the sliding guide

$$L = (C / F)^3 \cdot 10^5$$

$$F = F_m + F_v$$

4. Nominal service life of the ball screw

$$L_{KGT} = (C_{KGT} / F)^3 \cdot 10^6$$

$$F = F_m + F_v \text{ (} F_v \text{ only with double nut (MM); approx. 10 \%)}$$

Definitions

F_m : Moderate load [N] of guide or ball screw

F_1, F_2, F_n : Stepped single load [N]

q_1, q_2, q_n : Stroke rate for F_1, F_2, F_n [%]

L : Nominal service life of guide [m]

C : Dynamic load rating of guide (C_{dyn}) [N] (see Table on pages TL11 and TL12)

R : Factor for roller guide size

Beta 50 ... Beta 80 + Sigma 70: $R = 0,625$; Beta 80-C + Sigma 90: $R = 0,75$;

Beta 100 + 110 + Sigma 120: $R = 0,87$;

Beta 120 + 140 + Sigma 160: $R = 1,1$;

Delta 90: $R = 0,595$ (Y) und $R = 0,625$ (Z)

F : Equivalent load [N] for guide or ball screw

F_v : Pretensioning [N] (3 % of C_{dyn} , 5 % for roller guide (see Table on pages TL11 and TL12)

L_{KGT} : Nominal service life of the ball screw [revolutions]

C_{KGT} : Dynamic load rating of the ball screw (C_{dyn}) [N] (see Table on page TL13)

Technical Data for Mounted Guides

Static and dynamic load ratings of the roller guides

Unit size	Size ($\varnothing$) [mm]	Number of supporting rollers for F _z	Number of supporting rollers for F _y	Load rating per roller C _{stat} [N]	Load rating per roller C _{dyn} [N]	Guide distance* in direction x [mm]		Guide distance in direction y [mm]
						l _{x1}	l _{x2}	
Beta 50-C	20	4	2	850	1500	86 (136)	86 (136)	30.5
Beta 50-C-ARS						82	81	
Beta 70-C	20	4	2	850	1500	74 (124)	138.5 (188.5)	41.5
Beta 70-C-ARS						120	182	
Beta 80	20	4	2	850	1500	95 (155)	156.5 (216.5)	42.5
Beta 80-ARS						155	216.5	
Beta 80-C	24	4	-	1240	2750	-	148.5 (208.5)	42.4
		-	2	2300	4200	75 (135)	-	-
Beta 80-C-ARS	24	4	-	1240	2750	-	208.5	42.4
		-	2	2300	4200	135	-	-
Beta 100	28	4	2	1850	3200	136 (256)	223 (343)	47
Beta 110	28	4	2	1850	3200	175 (355)	262 (442)	66
Beta 110-ARS						253	340	
Beta 120	35	4	2	2590	5280	148 (328)	148 (328)	70
Beta 140	35	4	2	2590	5280	202 (382)	202 (382)	98
Beta 140-ARS						192 (272)	192 (272)	
Delta 90	20	4	-	790	1830	-	100 (180)	54.4
	19	-	2	1370	2700	100 (180)	-	-
Sigma 70	20	4	4	850	1500	67 (117)	71 (121.5)	57
Sigma 90	24	4	4	1240	2750	76 (126)	99 (149)	77
Sigma 120	28	4	4	1850	3200	130 (260)	160.5 (290)	99
Sigma 160	35	4	4	2590	5280	145 (295)	177.5 (327.5)	135

The pretensioning per roller is approx. 5 %.

* () = Data for long entire carriage, Beta ARS and Sigma ARH

Dynamic load ratings of the rail guides (THK and Rex = Rexroth)

Unit size	Size	Number of rails	Number of guiding carriages per carriage	Load rating per carriage C _{dyn} [N] THK / Rex	Pretensioning F _v [N] THK / Rex	M _t [Nm] THK / Rex	Guide distance* in direction x [mm]	Guide distance in direction y [mm]
							l _{x1}	l _y
Beta 40	12	1	2	3175 / 2310	-	18,3 / 13,7	83 (163)	-
Beta 60-ZSS	15	1	2	11270 / 9860	564 / 620	127 / 95	102 (152)	-
Beta 60-SSS	15	1	2	11270 / 9860	564 / 620	127 / 95	118 (168)	-
Beta 70-C-ZSS	15	1	2	11270 / 9860	564 / 620	127 / 95	120 (170)	-
Beta 70-C-SSS	15	1	2	11270 / 9860	564 / 620	127 / 95	124 (174)	-
Beta 70-C-ASS	15	1	2	11270 / 9860	564 / 620	127 / 95	164	-
Beta 80-ZSS	20	1	2	17700 / 23400	885 / 1500	286 / 300	131 (191)	-
Beta 80-SSS	20	1	2	17700 / 23400	885 / 1500	286 / 300	128 (188)	-
Beta 80-C	25	1	2	25160 / 28600	1258 / 1820	447 / 410	122 (182)	-
Beta 80-C-ASS	25	1	2	25160 / 28600	1258 / 1820	447 / 410	172	-
Beta 100	20	1	2	17700 / 23400	885 / 1500	286 / 300	152 (272)	-
Beta 100-D-ZSS	15	2	4	11270 / 9860	564 / 620	-	150 (210)	56
Beta 100-D-ASS	15	2	4	11270 / 9860	564 / 620	-	192	56
Beta 100-D-SSS	15	2	4	11270 / 9860	564 / 620	-	141 (201)	56

Technical Data for Mounted Guides

Dynamic load ratings of the rail guides (THK and Rex = Rexroth)

Unit size	Size	Number of rails	Number of guiding carriages per carriage	Load rating per carriage C_{dyn} [N] THK / Rex	Pretensioning F_v [N] THK / Rex	M_t [Nm] THK / Rex	Guide distance* in direction x [mm]	Guide distance in direction y [mm]
							lx1	ly
Beta 110	25	1	2	25160 / 28600	1258 / 1820	447 / 410	203 (383)	-
Beta 110-ASS	25	1	2	25160 / 28600	1258 / 1820	447 / 410	315	-
Beta 120-ZSS	25	1	2	25160 / 28600	1258 / 1820	447 / 410	142 (322)	-
Beta 120-C	30	1	2	35557 / 36500	1778 / 2540	686 / 630	184 (364)	-
Beta 140	15	2	4	11270 / 9860	564 / 620	-	180 (360)	72
Beta 140-ASS	15	2	4	11270 / 9860	564 / 620	-	242 (322)	72
Beta 140-C-ZSS	20	2	4	17700 / 23400	885 / 1500	-	220 (400)	76
Beta 140-C-ASS	20	2	4	17700 / 23400	885 / 1500	-	220 (300)	76
Beta 140-C-SSS	20	2	4	17700 / 23400	885 / 1500	-	210 (390)	76
Beta 165-ZSS	35	1	2	49447 / 51800	2472 / 3350	1214 / 1010	198 (398)	-
Beta 165-SSS	35	1	2	49447 / 51800	2472 / 3350	1214 / 1010	228 (428)	-
Beta 165-C-SSF	30L	2	4	43018 / 46000	2151 / 3200	-	280	128
Beta 180-ZSS	20	2	4	17700 / 23400	885 / 1500	-	176 (396)	84
Beta 180-ASS	20	2	4	17700 / 23400	885 / 1500	-	310	84
Beta 180-SSS	20	2	4	17700 / 23400	885 / 1500	-	233 (453)	84
Beta 180-C-ZSS	25	2	4	25160 / 28600	1258 / 1820	-	272 (492)	84
Beta 180-C-ASS	25	2	4	25160 / 28600	1258 / 1820	-	307	84
Beta 180-C-SSS	25	2	4	25160 / 28600	1258 / 1820	-	233 (453)	84
Delta 110-C	15	2	4	11270 / 9860	564 / 620	-	75 (195)	66
Delta 145-C	20	2	4	17700 / 23400	885 / 1500	-	87 (207)	87
Delta 200	25	2	4	25160 / 28600	1258 / 1820	-	144 (294)	126
Delta 240(-C)	25	2	4	25160 / 28600	1258 / 1820	-	159 (279)	150
Alpha 15B	15	2	4	11270 / 9860	564 / 620	-	94 (164)	105
Alpha 20B	20	2	4	17700 / 23400	885 / 1500	-	143 (243)	160
Alpha 30B	30	2	4	35557 / 36500	1778 / 2540	-	205 (335)	240
Alpha 35B	35L	2	4	57860 / 66700	2893 / 4450	-	286 (436)	336
Gamma 90-ZSS	15	2	4	11270 / 9860	564 / 620	-	135 (285)	73
Gamma 90-ZSSD	15	2	4	11270 / 9860	564 / 620	-	75	73
Gamma 90-ASH	15	2	4	11270 / 9860	564 / 620	-	265	73
Gamma 90-AZS.	15	2	4	11270 / 9860	564 / 620	-	255	90
Gamma 120-ZSS	20	2	4	17700 / 23400	885 / 1500	-	170 (320)	90
Gamma 120-ZSSD	20	2	4	17700 / 23400	885 / 1500	-	80	104
Gamma 120-ASH	20	2	4	17700 / 23400	885 / 1500	-	320	90
Gamma 120-AZS.	20	2	4	17700 / 23400	885 / 1500	-	320	115
Gamma 160-ZSS	25	2	4	25160 / 28600	1258 / 1820	-	208 (408)	120
Gamma 160-ZSSD	25	2	4	25160 / 28600	1258 / 1820	-	208 (408)	120
Gamma 160-ASH	25	2	4	25160 / 28600	1258 / 1820	-	408	120
Gamma 160-AZS.	25	2	4	25160 / 28600	1258 / 1820	-	402	151
Gamma 220-ZSS	25L	2	4	29208 / 37300	1460 / 2430	-	210 (390)	180
Gamma 220-ZSSD	25L	2	4	29208 / 37300	1460 / 2430	-	210 (390)	180
Gamma 220-ASS	25L	2	4	29208 / 37300	1460 / 2430	-	390	180
Gamma 220-AZS.	25L	2	4	29208 / 37300	1460 / 2430	-	440	196
Gamma 280-ZSS	35	2	4	49447 / 51800	2472 / 3350	-	275 (475)	236
Gamma 280-ZSSD	35	2	4	49447 / 51800	2472 / 3350	-	275 (475)	236
Gamma 280-AZSS	35	2	4	49447 / 51800	2472 / 3350	-	480	253

Technical Data for Mounted Ball Screws

Dynamic load ratings for ball screw

Unit size		Nominal Ø [mm]	Pitch P [mm]	C _{dyn} RH [N]	C _{dyn} LH [N]
Beta 40 Beta 50-C	Delta 90	12	5 10	3800 4300	1907 -
Beta 70-C	Delta 110-C	16	5 10 20 40	12800 14300 8100 8500	14800 - - -
Beta 60 Beta 80 Beta 100-D	Delta 145-C	20	5 10 20 50	14600 13500 11500 12300	21000 - - -
Beta 80-SGV Beta 110 Beta 140(-C)		25	5 10 25 50	16100 15100 15800 14500	19100 - - -
Beta 110-C-SGV Beta 120-C Beta 180(-C)	Delta 200 Delta 240(-C)	32	5 10 20 40 60	26200 33100 30200 15200 18400	25900 - - - -
Beta 110-C-SGV Beta 165		40	5 10 20 40	34900 60000 45500 44400	34900 60000 - -
Beta 165-C-SGV		50	10 20	95600 57500	- -
Beta 165-C-SSF		50	10 20	95600 116500	- -
Alpha 15B		20	5 10 20 50	14600 13500 11500 12300	17200 - - -
Alpha 20B		25	5 10 25 50	16100 15100 15800 14500	19100 - - -
Alpha 30B		32	5 10 20 40	26200 33100 30200 15200	25900 - - -
Alpha 35B		40	5 10 20 40	34900 60000 45500 44400	34900 60000 - -

(Dynamic load rating for ball screw nut in accordance with DIN 69051, 1989)

Maximum Drive Torques

Unit size	F _{Max} [N]	Stroke/revol. [mm]	M _{load} [Nm]	M _{idle} [Nm]	M _{total} [Nm]
Delta 90-ZRS	800	100	12.73	2.00	14.73
Delta 90-SRS	1000	10	1.59	0.3	1.59
Delta 110-C-ZSS	950	110	16.63	2.00	18.63
Delta 110-C-SSS	2000	40	12.73	1.00	13.73
Delta 145-C-ZSS	2000	150	47.75	3.00	50.75
Delta 145-C-SSS	6000	50	47.75	1.00	48.75
Delta 200-ZSS	6000	220	210.08	6.8	216.88
Delta 200-SSS	10000	60	95.49	2.8	95.49
Delta 240-ZSS	2500	150	59.68	5.5	59.68
Delta 240-SSS	12000	60	114.59	2.8	114.59
Delta 240-C-ZSS	3800	180	108.86	5.5	108.86
Delta 240-C-SSS	12000	60	114.59	2.8	114.59
Alpha 15-B-155	4000	50	31.83	0.35	31.83
Alpha 20-B-255	6000	50	47.75	1.2	47.75
Alpha 30-B-325	12000	40	76.39	1.6	76.39
Alpha 35-B-455	18000	40	114.59	2.5	114.59
Gamma 90-ZSS	2300	210	76.87	3.2	76.87
Gamma 90-ZSSD	1150	200	36.61	2.9	36.61
Gamma 90-ASH	2300	210	76.87	3.2	76.87
Gamma 90-AZ.. (i=5:1)	1800	24	6.88	2.5	6.88
Gamma 120-ZSS	2800	200	89.13	3.00	92.13
Gamma 120-ZSSD	1800	200	57.30	3.00	60.30
Gamma 120-ASH	3200	240	122.23	3.6	122.23
Gamma 120-AZ.. (i=5:1)	2200	40	14.01	4.8	14.01
Gamma 160-ZSS	4000	240	152.79	4.00	156.79
Gamma 160-ZSSD	2200	210	73.53	4.00	77.53
Gamma 160-ASH	4000	240	152.79	4.00	156.79
Gamma 160-AZ.. (D75 i=5:1)	2200	40	14.01	5.8	14.01
Gamma 160-AZ.. (D90 i=5:1)	4000	40	25.46	5.8	25.46
Gamma 220-ZSS	6000	320	305.58	7.00	312.58
Gamma 220-ZSSD	2800	240	106.95	5.25	106.95
Gamma 220-ASS	6000	320	305.58	7.00	312.58
Gamma 220-AZ.. (M2 D90 i=5:1)	4000	40	25.46	7.2	25.46
Gamma 220-AZ.. (M2 D115 i=5:1)	6000	40	38.20	7.2	38.20
Gamma 220-AZ.. (M3 D90 i=5:1)	4000	40	25.46	7.2	25.46
Gamma 220-AZ.. (M3 D115 i=5:1)	7500	40	47.75	7.2	47.75
Gamma 280-ZSS	10000	450	716.20	11.00	727.20
Gamma 280-ZSSD	4000	300	190.99	11.00	201.99
Gamma 280-AZSS (D90 i=5:1)	4000	40	25.46	8.6	25.46
Gamma 280-AZSS (D115 i=5:1)	7500	40	47.75	8.6	47.75

Maintenance

Maintenance instructions for THK and Rexroth rail guide

For all guide carriage sizes, the relubrication interval is approx. 5000 km for the carriage with ball chain or approx. 2000 km for the carriage without (Rexroth without ball chain / standard). It is dependent on several factors, i.e. operating temperature, load, degree of pollution, etc. Grease quantity depends on the guide carriage (see Table).

Size		12	15	20	25	30	35
Guide		THK					
Quantity	[cm ³]	0.14	0.4	0.6	1.2	1.5	1.7
Guide		Rexroth					
Quantity	[cm ³]	0.15	0.8	1.4	2.8	4.4	4.4

Klüberplex BE 31-102 is used for the initial lubrication. (When using other roller bearing greases, please take note of the manufacturer's instructions!) Roller bearing greases with a solid lubricant percentage (e.g. graphite or MoS₂) is not to be used.

Please refer here to our assembly and maintenance instructions.

Maintenance instructions for roller guide

Under normal operating conditions (dry environment, no dust, etc.), the roller guide is lubricated for life by integrated lubricating felts.

Maintenance instructions for ball screw

For ball screws, relubrication intervals depend on the pitch and the spindle diameter:

KGT 12xx to 32xx after approx. 2.5×10^7 overrolling movements

KGT 40xx and 50xx after approx. 1.5×10^7 overrolling movements

KGT-Type	[Size]	1205	1210	1605	1610	1620	1640	2005	2010	2020	2050	2505	2510	2525	2550
Quantity	[cm ³]	0,55	0,55	1,70	1,80	1,70	1,80	2,00	2,10	2,30	4,50	2,60	3,40	3,10	4,80

KGT-Type	[Size]	3205	3210	3220	3232	3240	3260	4005	4010	4020	4040	5010	5020
Quantity	[cm ³]	4,20	5,60	4,60	5,30	3,00	4,60	5,30	15,40	10,20	14,30	25,90	26,50

Klüberplex BE 31-102 is used for the initial lubrication. (When using other roller bearing greases, please take note of the manufacturer's instructions!) Roller bearing greases with a solid lubricant percentage (e.g. graphite or MoS₂) is not to be used.

In general, ball screw spindles should be protected against contamination. A cover band (standard) or a bellows can be used here.

Please refer here to our assembly and maintenance instructions.

Note: PRESSOL 12226 (125 cm³) one-hand grease gun with spout and corresponding coupler can be ordered from us.

Other maintenance instructions

The relubrication interval and the relubrication amount are generally influenced by many factors (e.g. speed, temperature, ambient conditions, etc.). For this reason, only reference values have been given here. Relubrication should take place at least every two years.

The relubrication should take place "in motion".

Note: The customer is required to carry out a basic lubrication after commissioning!

All mounted ball bearings are sealed and maintenance-free.

The toothed belt is also maintenance-free and must only be replaced if an excess load leads to the breakage or elongation of the elastic area.

Excessive dust and contamination on the toothed belt and at the cover band should be regularly removed.